

FIG. 1  
(PRIOR ART)

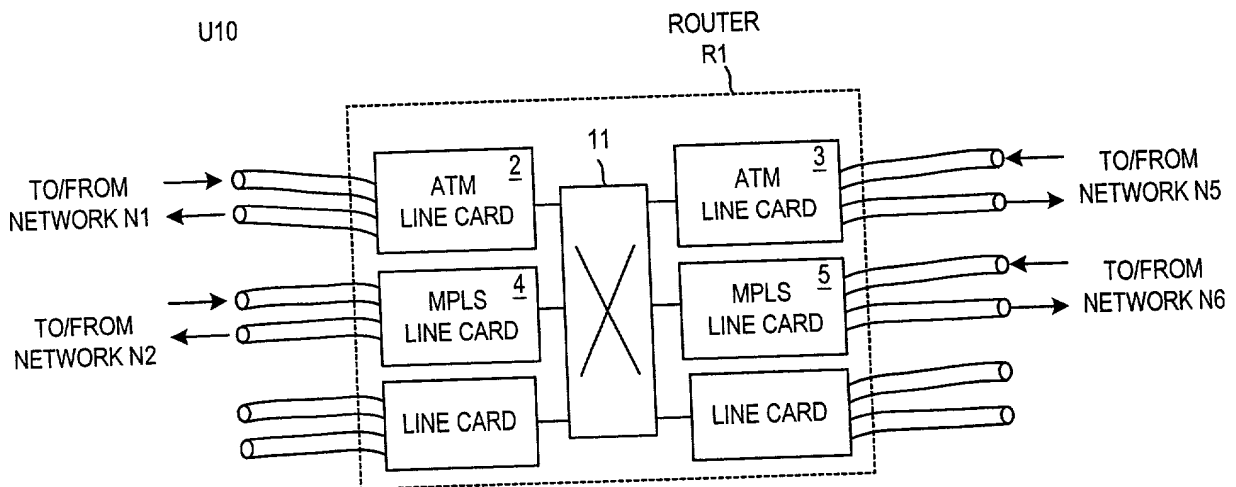


FIG. 2  
(PRIOR ART)

FIG. 1 (PRIOR ART)

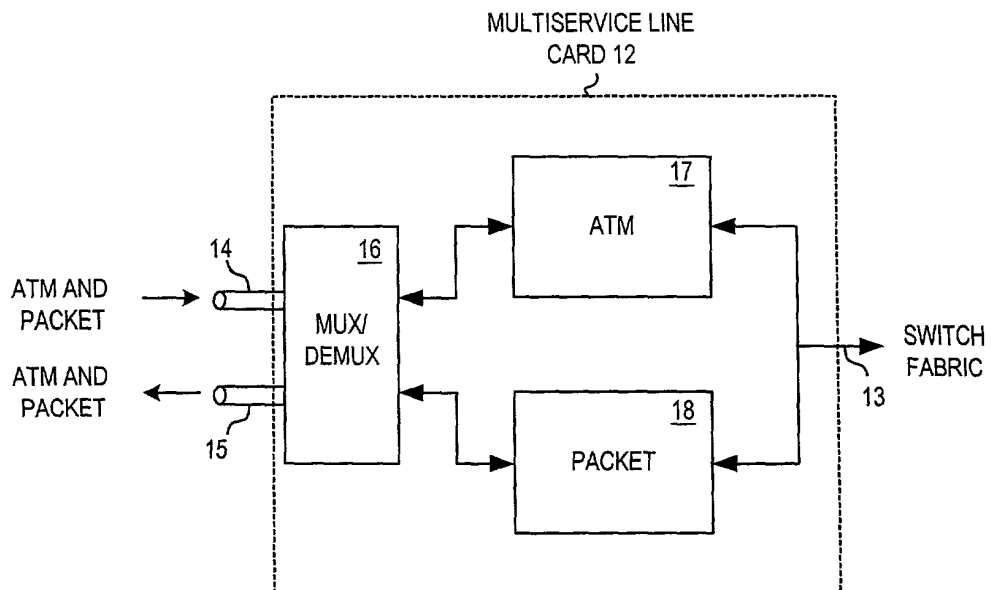


FIG. 3

FIG. 3

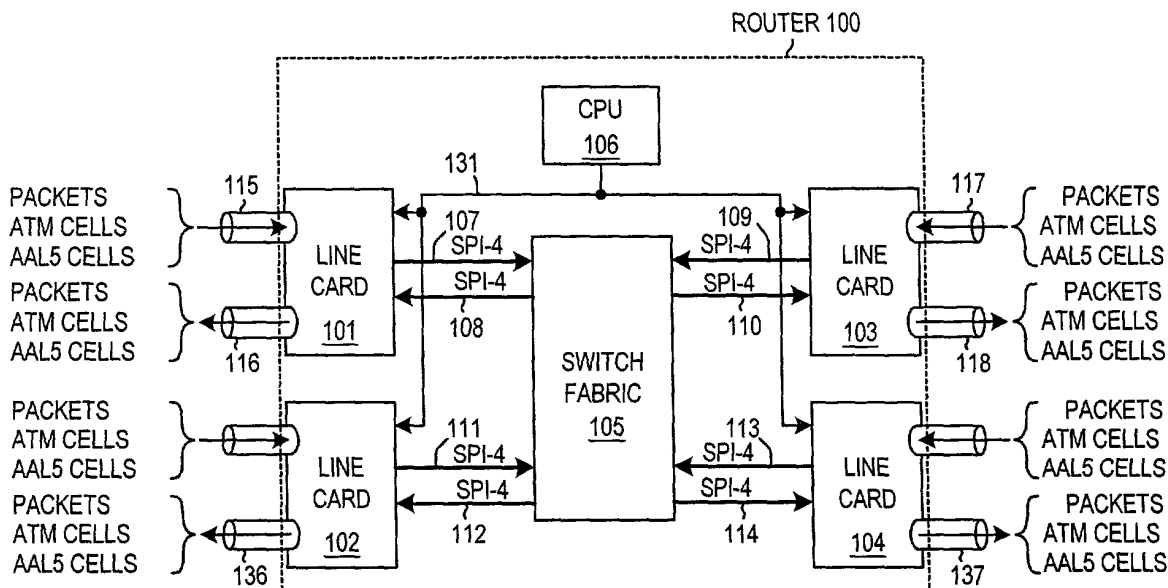


FIG. 4

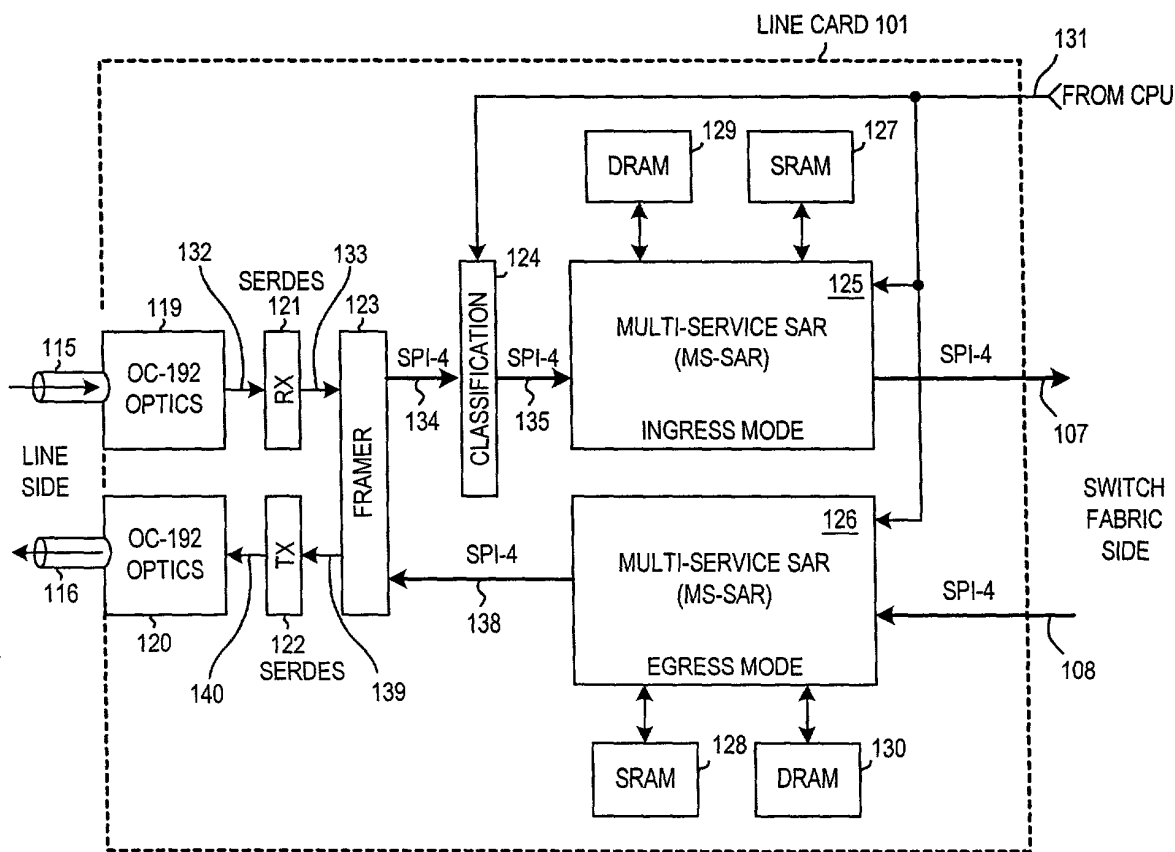


FIG. 5

SWITCH FABRIC	APPLICATION TYPE	INGRESS APPL TYPE	EGRESS APPL TYPE
CELL	ATM => ATM	0	8
	ATM => MPLS PACKET	1	9
	MPLS PACKET => ATM	2	10
	MPLS PACKET => MPLS PACKET	3	11
PACKET	ATM => PACKET	4	14
	PACKET => ATM	6	12
	AAL5 => PACKET	5	14
	PACKET => AAL5	6	13
	PACKET => PACKET	6	14

APPLICATION TYPES

FIG. 6

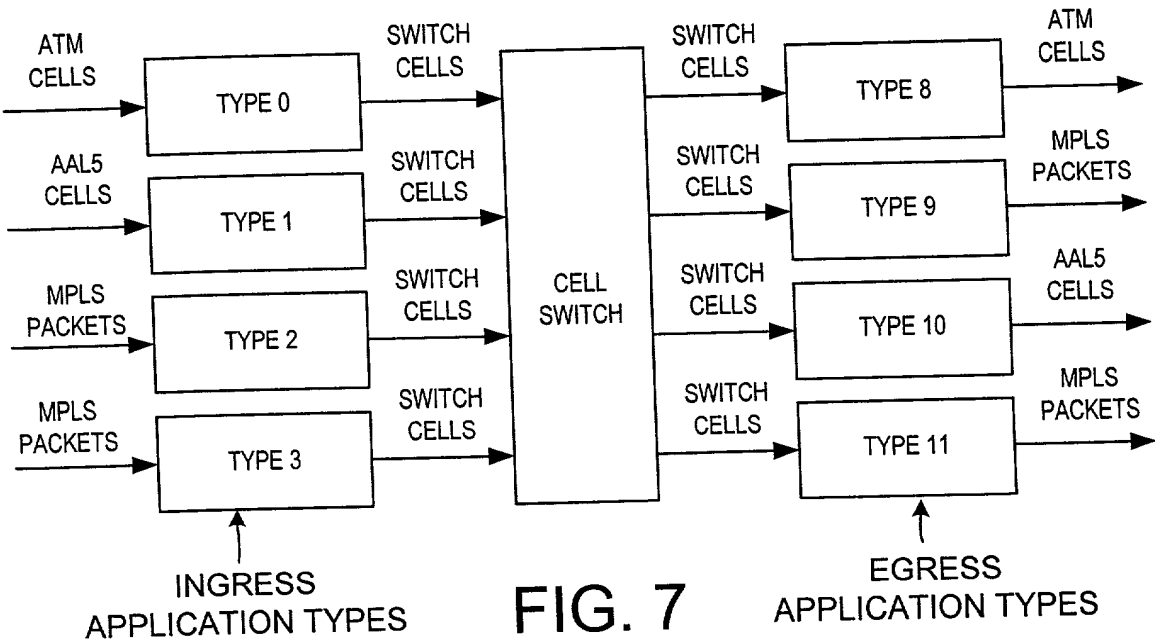


FIG. 7

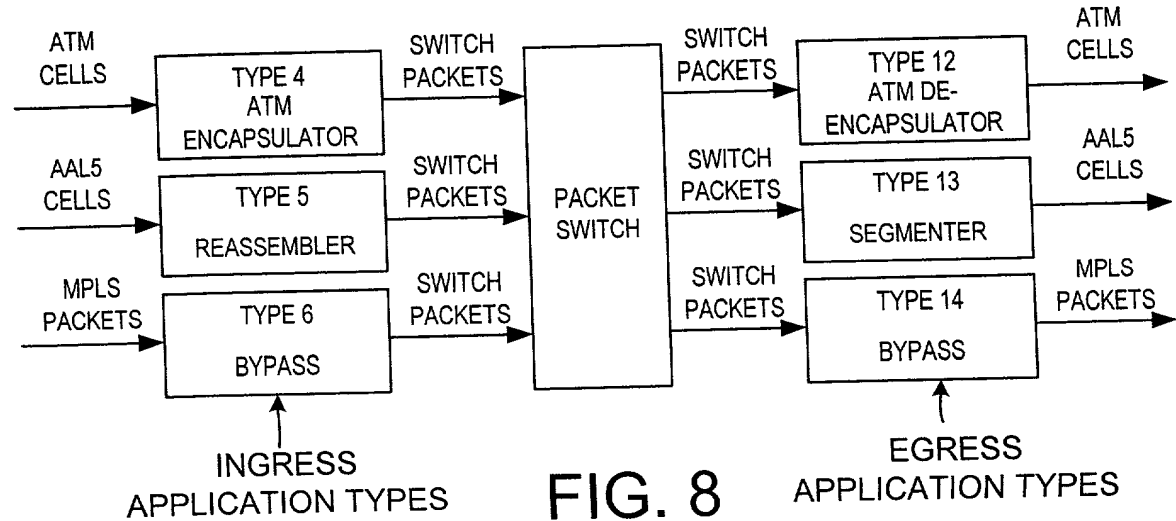
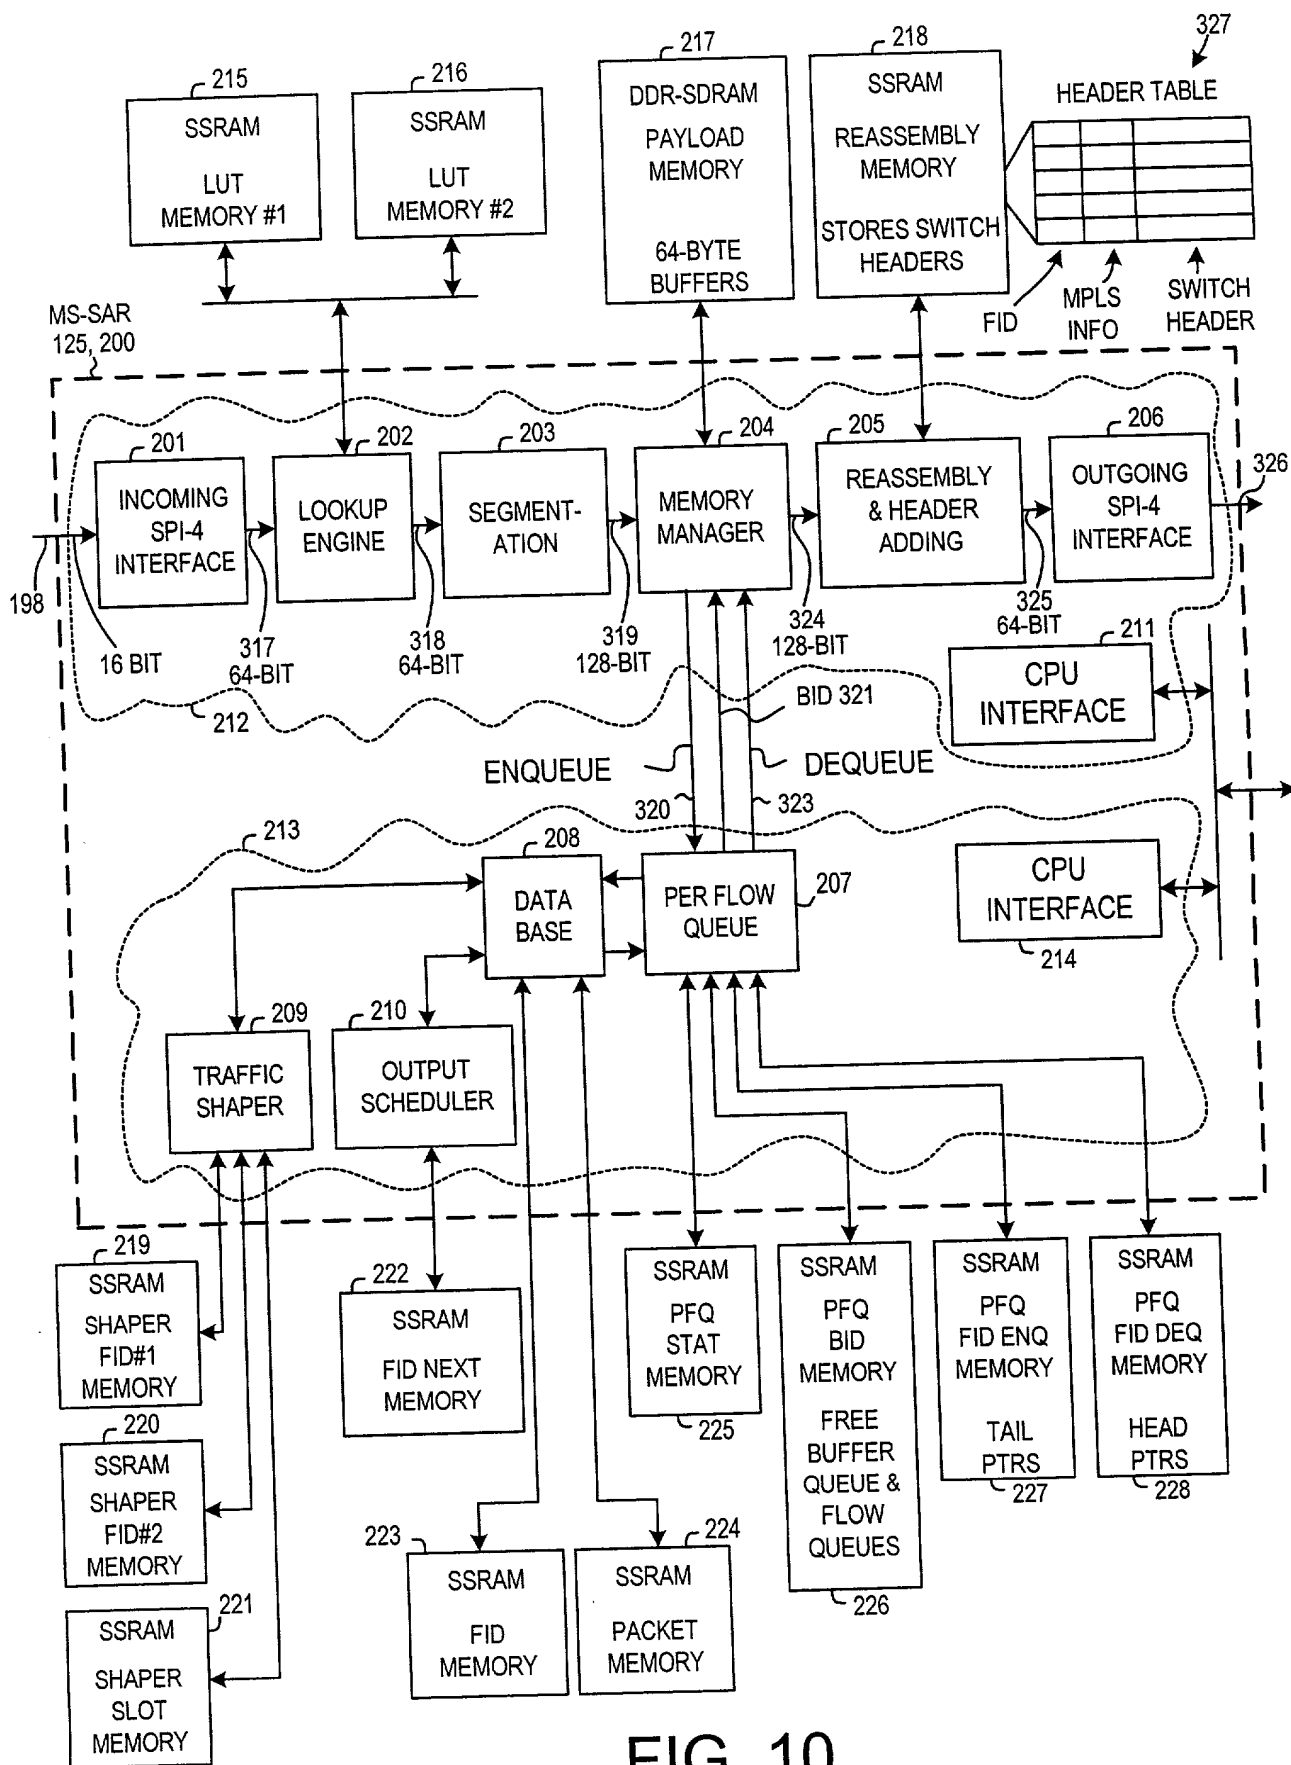


FIG. 8



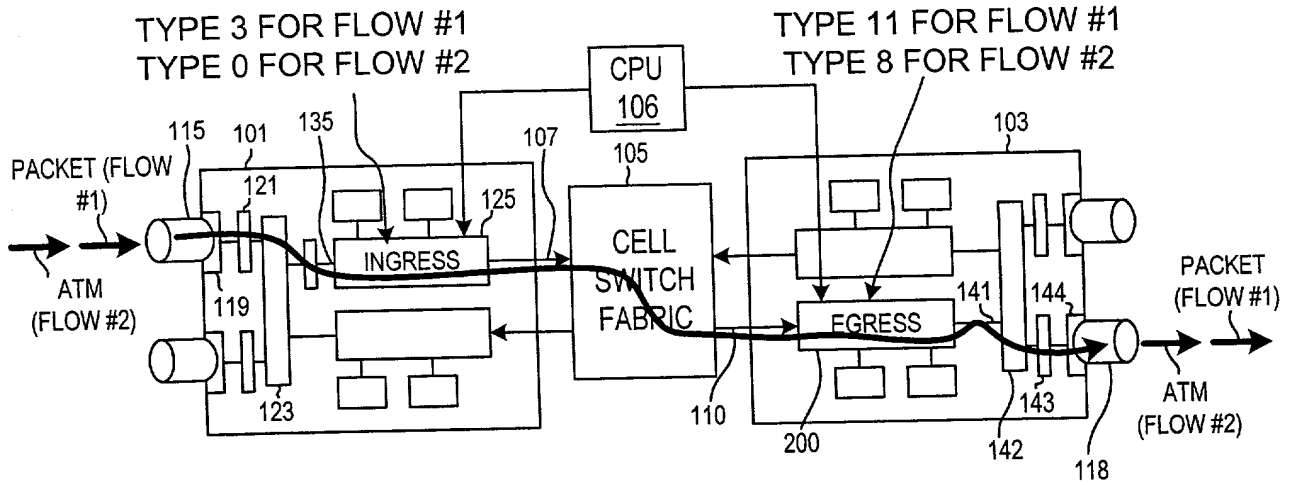


FIG. 9

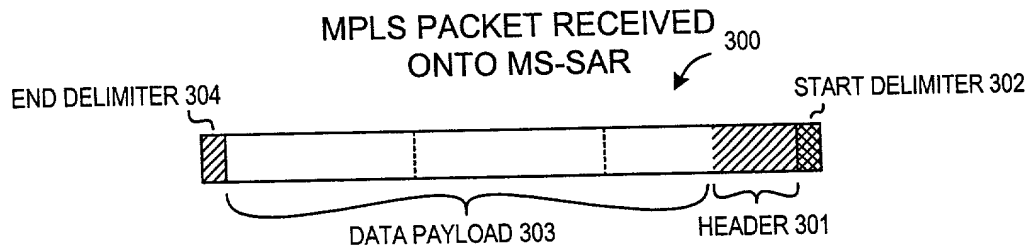


FIG. 11


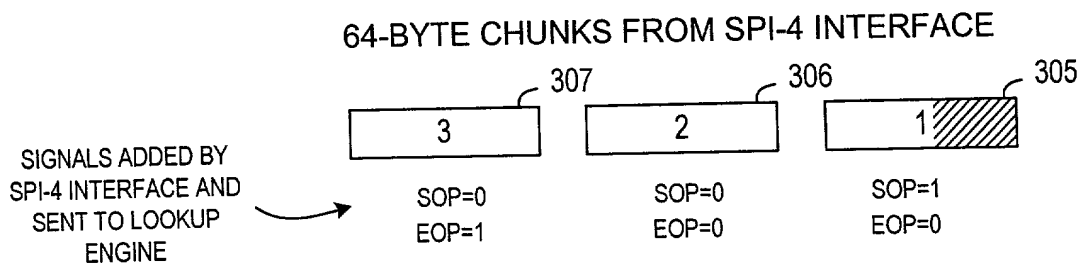


FIG. 12

FIG. 9

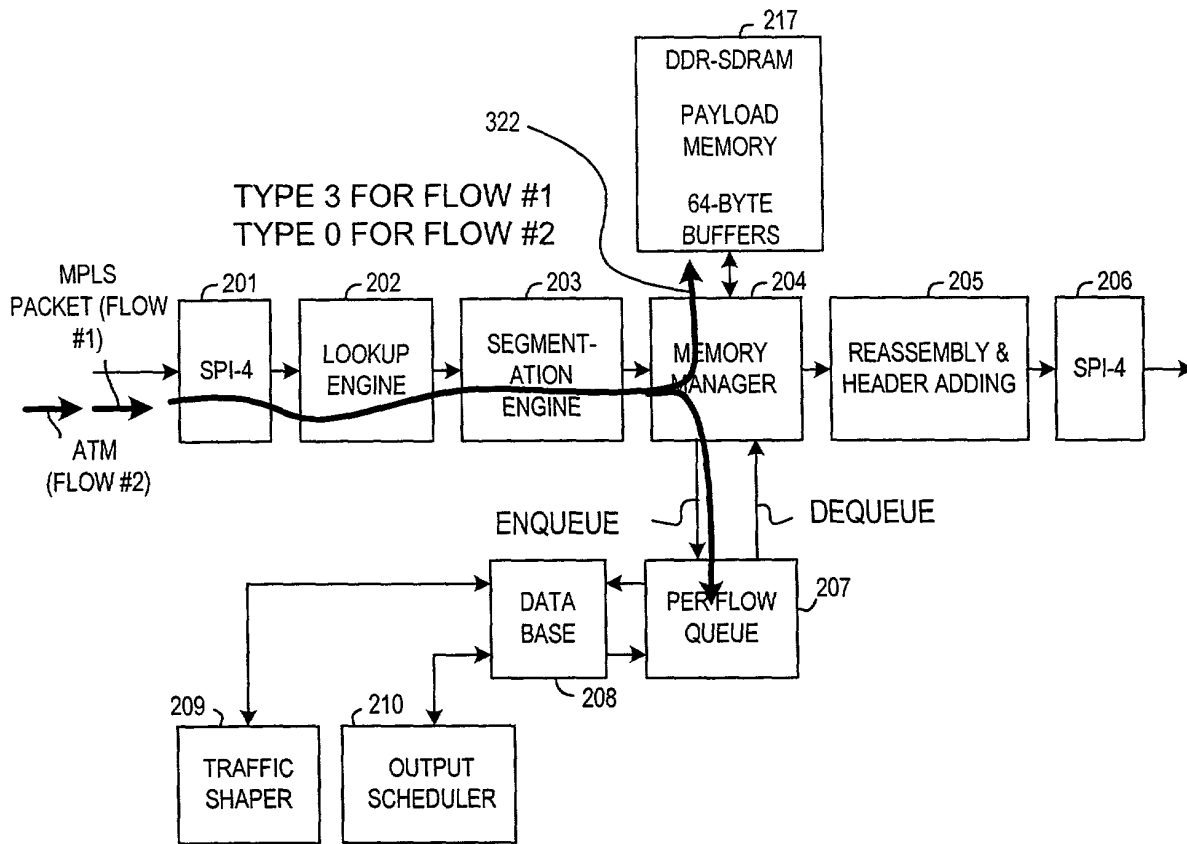

INGRESS MODE

FIG. 13

PORT TABLE IN LOOKUP BLOCK

64 LOGICAL INPUT PORTS

1		10000	0
45		10000	0

INPUT PORT NUMBER

NUMBER OF BYTES OF SWITCH HEADER (USED BY EGRESS)

TRAFFIC TYPE (USED BY INGRESS)

FIG. 14

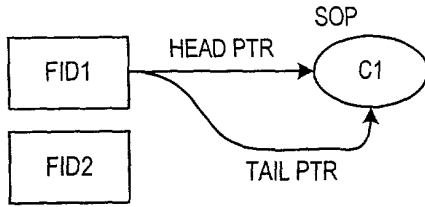


FIG. 15A

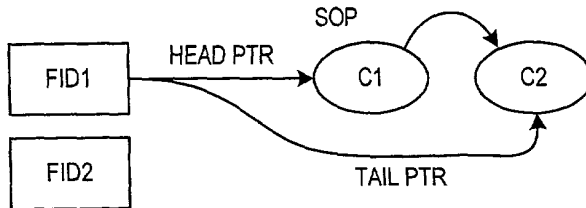


FIG. 15B

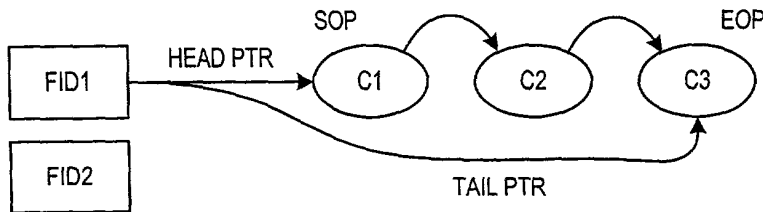


FIG. 15C

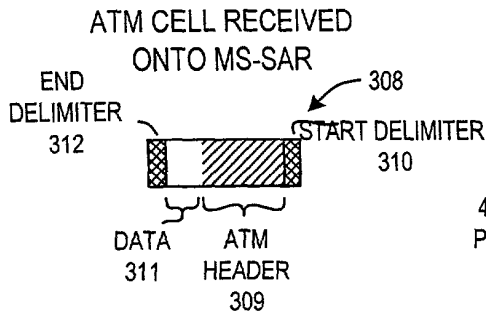


FIG. 20

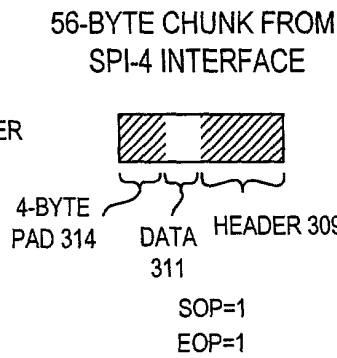


FIG. 21

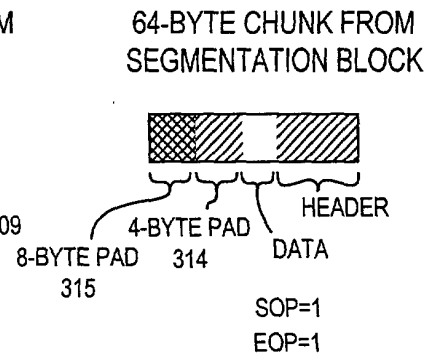


FIG. 22

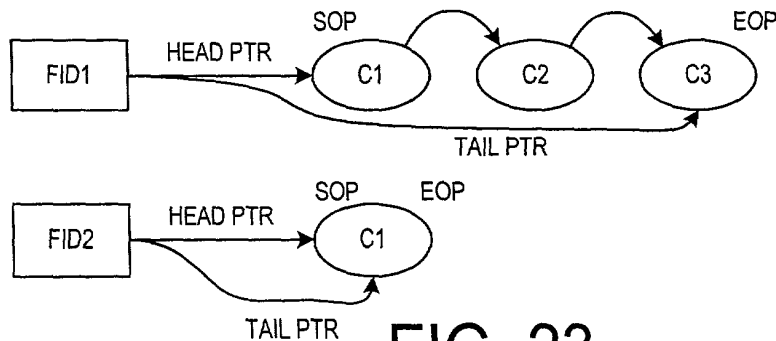


FIG. 23

FIG. 15A



NAME	NO BITS	RANGE	WR	DESCRIPTION
BID HEAD	23	22:0	H	HEAD POINTER. FIRST BUFFER TO BE ENQUEUED, AND FIRST BUFFER TO BE DEQUEUED. IF NULL, THE QUEUE IS EMPTY.
HD EOP PKT	1	23	H	IF SET, THE HEAD BID IS THE EOP.
HD SOP PKT	1	23	H	IF SET, THE HEAD BID IS THE SOP.
HD EFCI	1	25	H	EFCI BIT.
CLP	1	26	H	CLP BIT. CAN BE MODIFIED BY DBS.
OAM	1	27	H	OAM BIT.
SPARE	1	28	H	
CLASS	3	31:29	H	CLASS OF FID.
FID TYPE	4	35:32	H	APPLICATION TYPE INDICATES THE PROCESSING THAT THE MS-SAR WILL TAKE ON THIS FLOW. WILL BE SENT TO MEMORY MANAGER. TYPE IS WRITTEN WITH THE HEAD POINTER.

FID DEQUEUE MEMORY LOCATION

FIG. 16

NAME	NO BITS	RANGE	WR	DESCRIPTION
BID TAIL	23	22:0	H	TAIL POINTER. LAST BUFFER TO BE ENQUEUED, AND LAST BUFFER TO BE DEQUEUED. IF NULL, THE QUEUE IS EMPTY.
BID PRV PKT TAIL	23	45:23	H	BID OF PREVIOUS PACKET'S TAIL BID. SAVED ON EOP.
TTL	1	46	H	WHEN 1, DISCARD AND DEACTIVATE THE FID.
OUTPUT PORT#	7	53:47	S	OUTPUT PORT NUMBER THAT THE FID WILL BE TRANSMITTED ON.
Q SIZE	18	71:54	H	SIZE OF THE QUEUE IN BIDS. INCREMENTED ON ENQUEUE. DECREMENTED ON EVERY DEQUEUE OPERATION.

FIRST FID ENQUEUE MEMORY LOCATION

FIG. 17

FOR "ET292660"

10/45

NAME	NO BITS	RANGE	WR	DESCRIPTION
VALID	1	0	S	IF SET, THEN ENQUEUE. IF NOT, THEN SETUP CONNECTION COMMAND AS NEEDED BEFORE ENQUEUE STARTS.
SPARE	8	8:1		
DROP UNTIL SOP	1	9	H	DROP UNTIL THE NEXT SOP.
SEL DROP COUNT ER	1	10	H	SEL THE COUNT FOR DROPPING.
SPARE	2	12:11		
CURRENT TAIL PKT CELL CNT	11	23:13	H	REPRESENTS THE NUMBER OF CELLS IN THE TAIL PACKET THAT IS BEING ENQUEUED.
SPARE	2	25:24		
ENQ NOT DISCARD RED PKT COUNT	16	41:26	H	THE NUMBER OF NOT DISCARDED PACKETS THAT HAVE ARRIVED SINCE LAST RED DISCARD. IT IS RESET ON THE NEXT RED DISCARD.
SPARE	2	43:42		
AVG	18	61:44	H	THE AVE SIZE OF THE QUEUE.

SECOND FID ENQUEUE MEMORY LOCATION

FIG. 18

NAME	NO BITS	RANGE	WR	DESCRIPTION
BID LINK	23	22:0	H	BID OF THE NEXT BUFFER IN FID QUEUE. ALSO CAN BE A BID LINKED ON THE FREE BUFFER QUEUE.
EOP PKT	1	23	H	END OF PACKET FOR THIS BID BID. EOP BELONGS TO THE BID LINK.
SOP PKT	1	24	H	START OF PACKET FOR THE CORRESPONDING BID. SOP BELONGS TO THE BID LINK.
EFCI	1	25	H	EFCI PASS THROUGH BIT.
OAM	1	26	H	OAM BIT.
CLP	1	27	H	CLP
SPARE	8	35:28		

BID MEMORY LOCATION

FIG. 19

TOP OF "ET292660"

PORT CALENDAR IN REASSEMBLY BLOCK


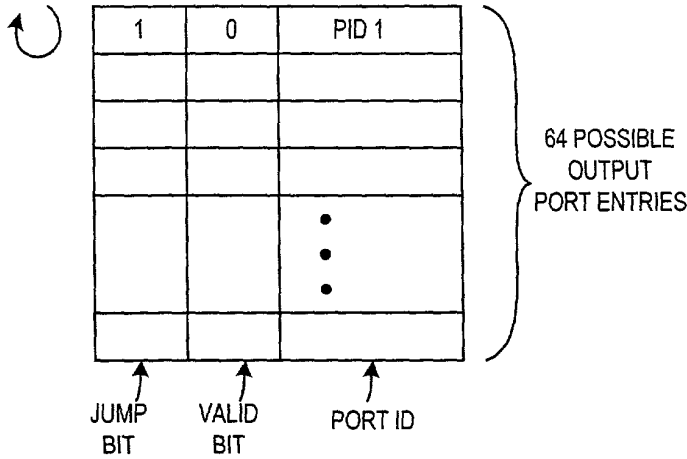


FIG. 24


64 BITS



PORT EMPTY REGISTER


FIG. 25

64 BITS



PORT FULL REGISTER

FIG. 26

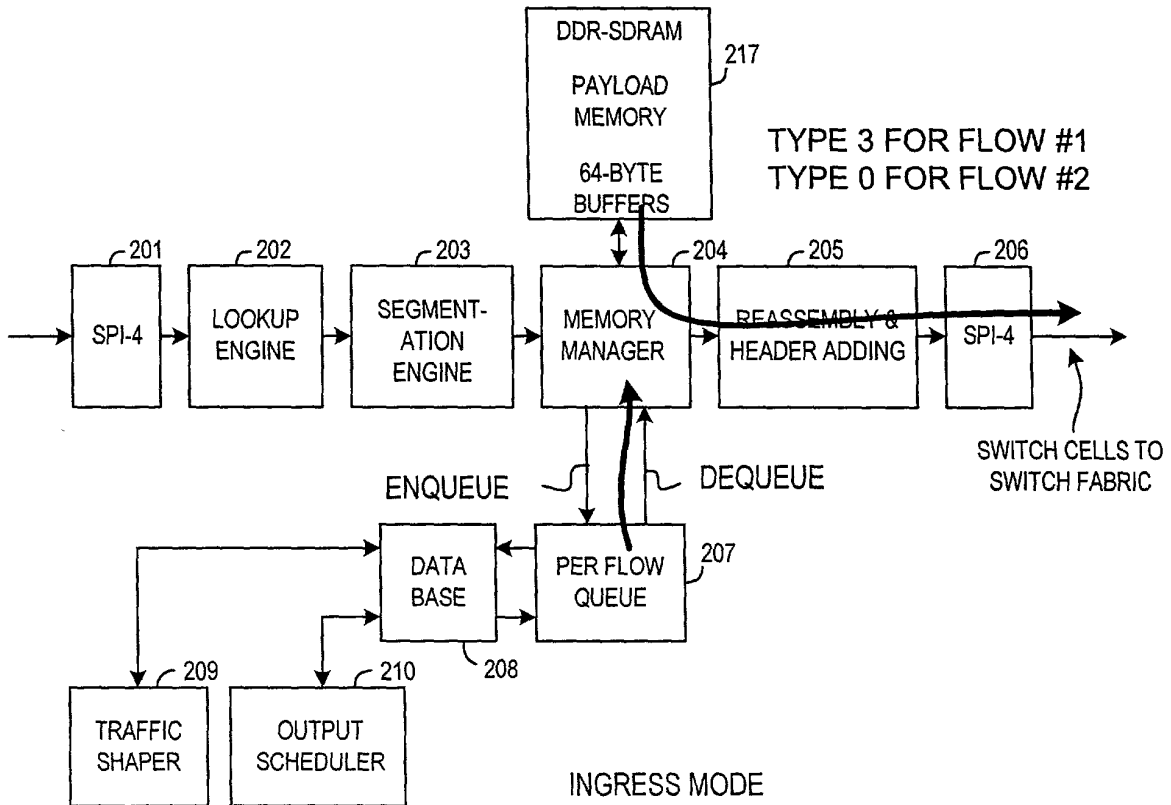

INGRESS MODE

FIG. 27

FIG. 24

12/45

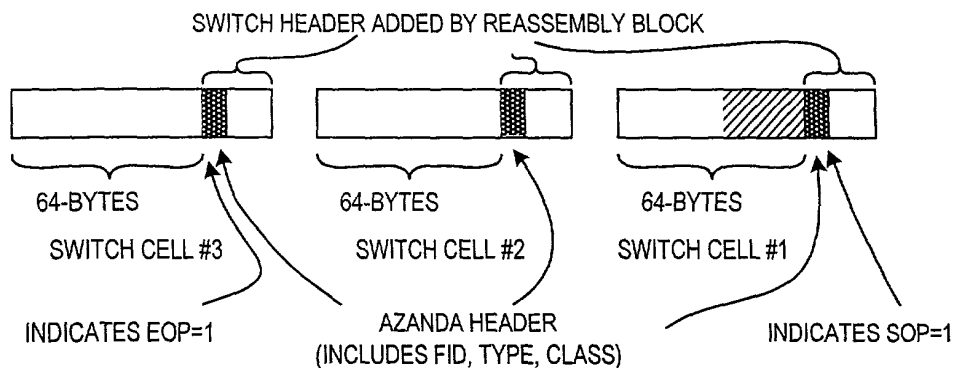


FIG. 28

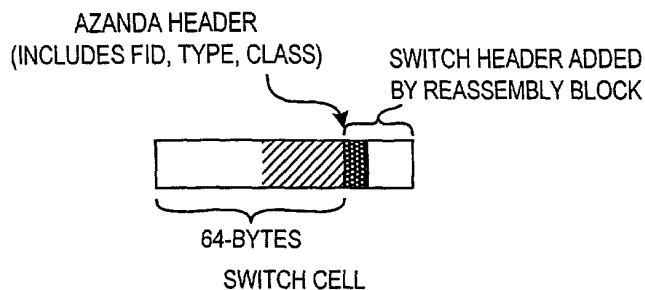


FIG. 29

LOOKUP BLOCK LOCATES AZANDA HEADER, DETERMINES APPLICATION TYPE

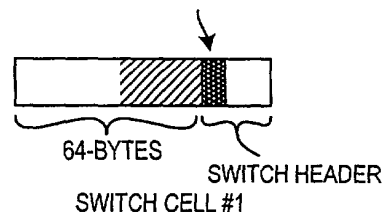


FIG. 31



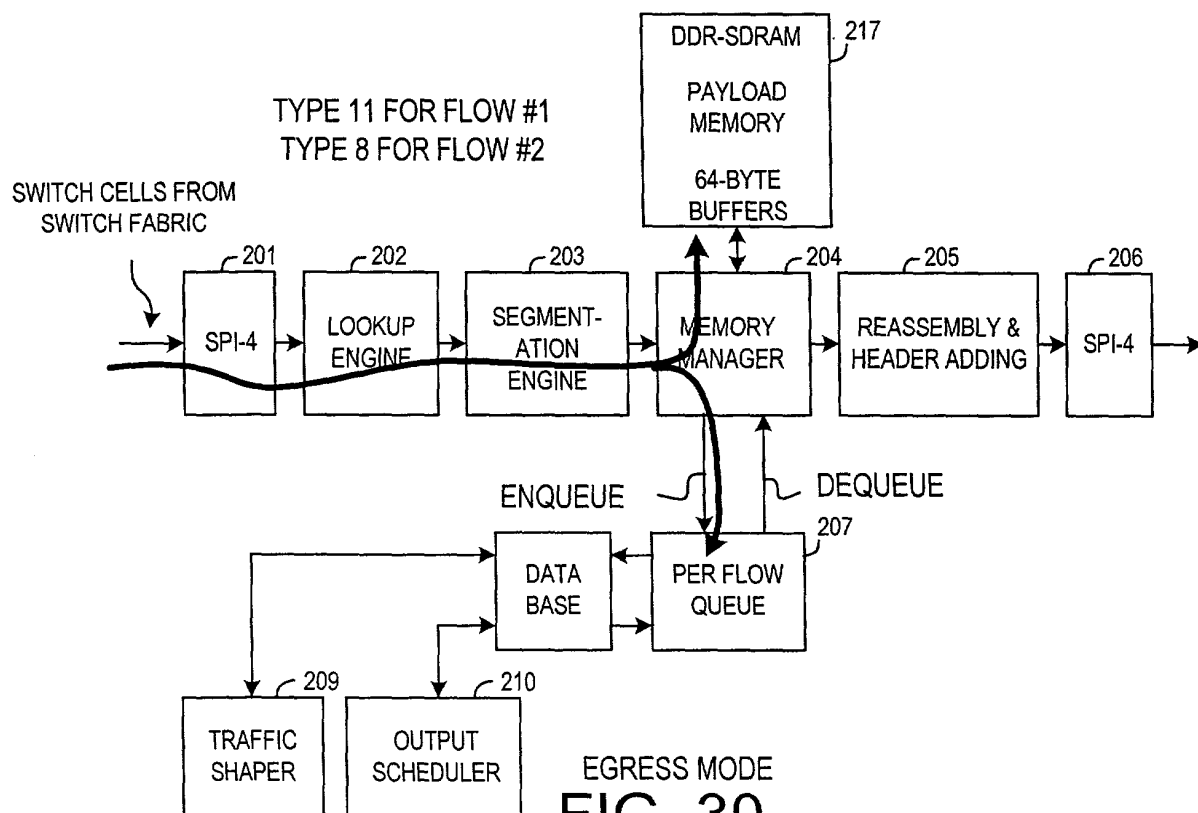


FIG. 30

FIG. 29

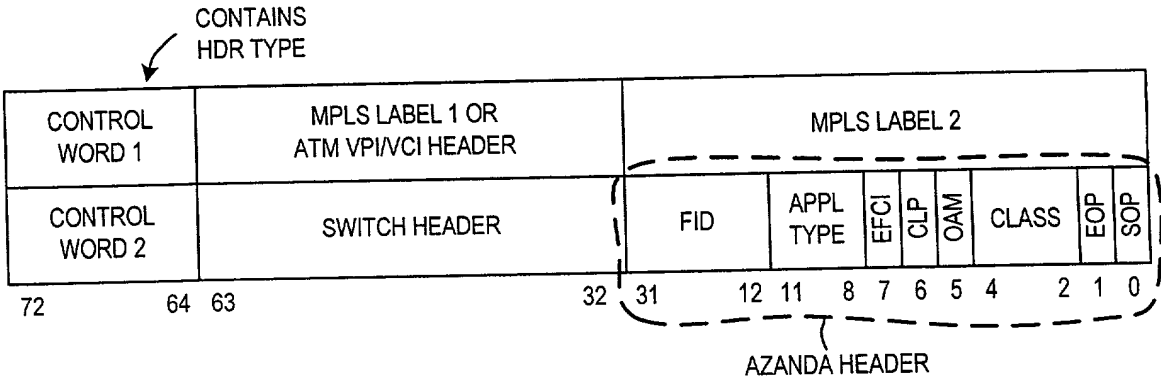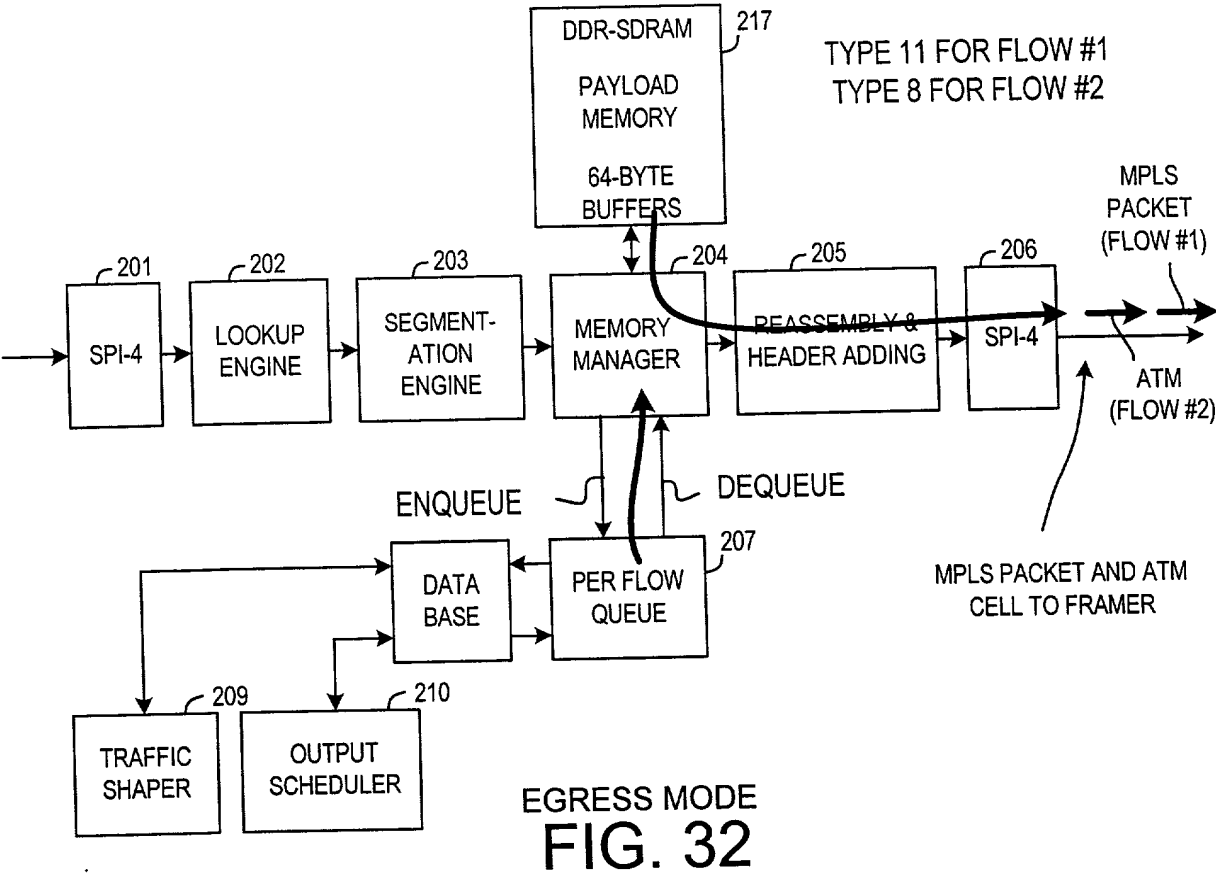

FORMAT OF ONE FID ENTRY  
IN HEADER TABLE  
**FIG. 33**

## 64-BYTE CHUNKS FROM REASSEMBLY TO SPI-4

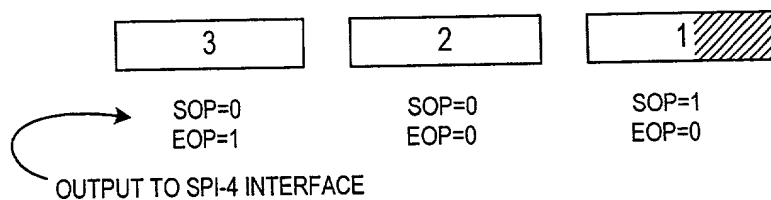


FIG. 34

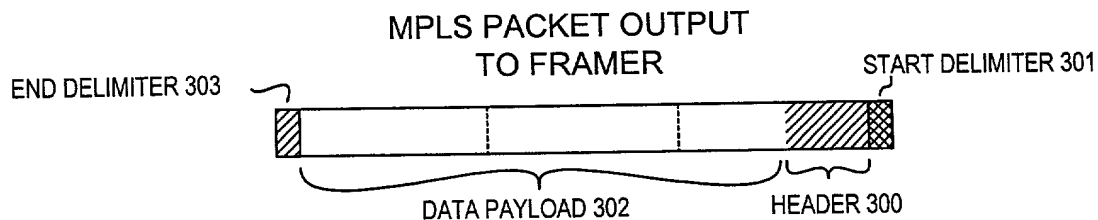


FIG. 35

## 56-BYTE CHUNK FROM REASSEMBLY BLOCK

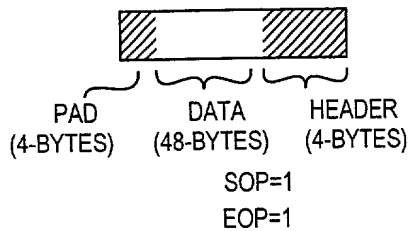


FIG. 36

## ATM CELL AS OUTPUT FROM SPI-4 INTERFACE

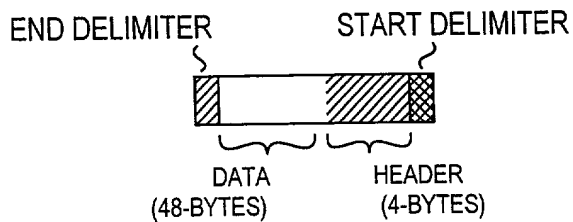


FIG. 37

15/45


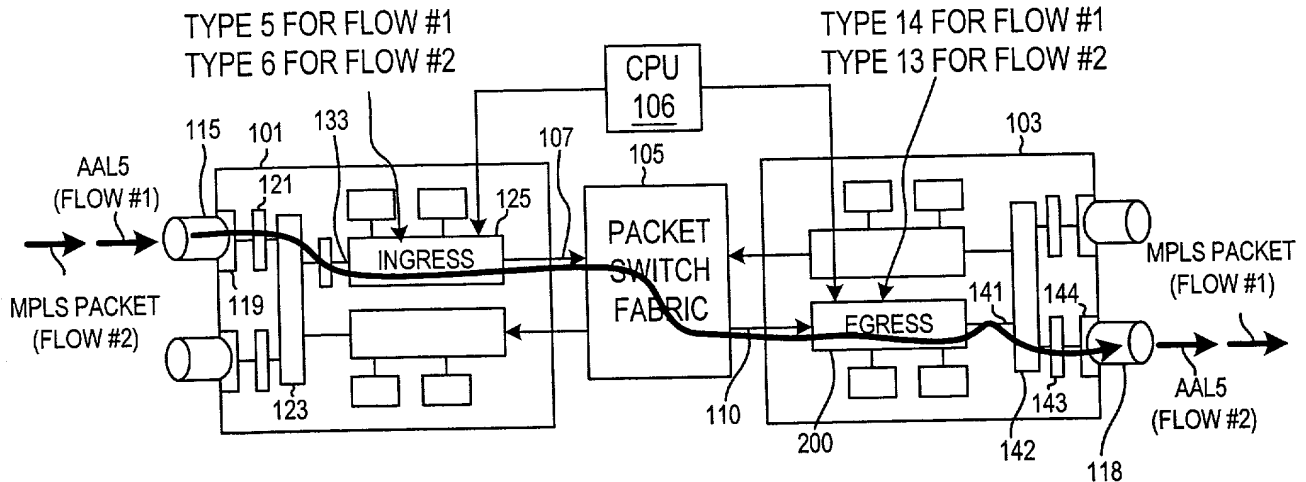



FIG. 38

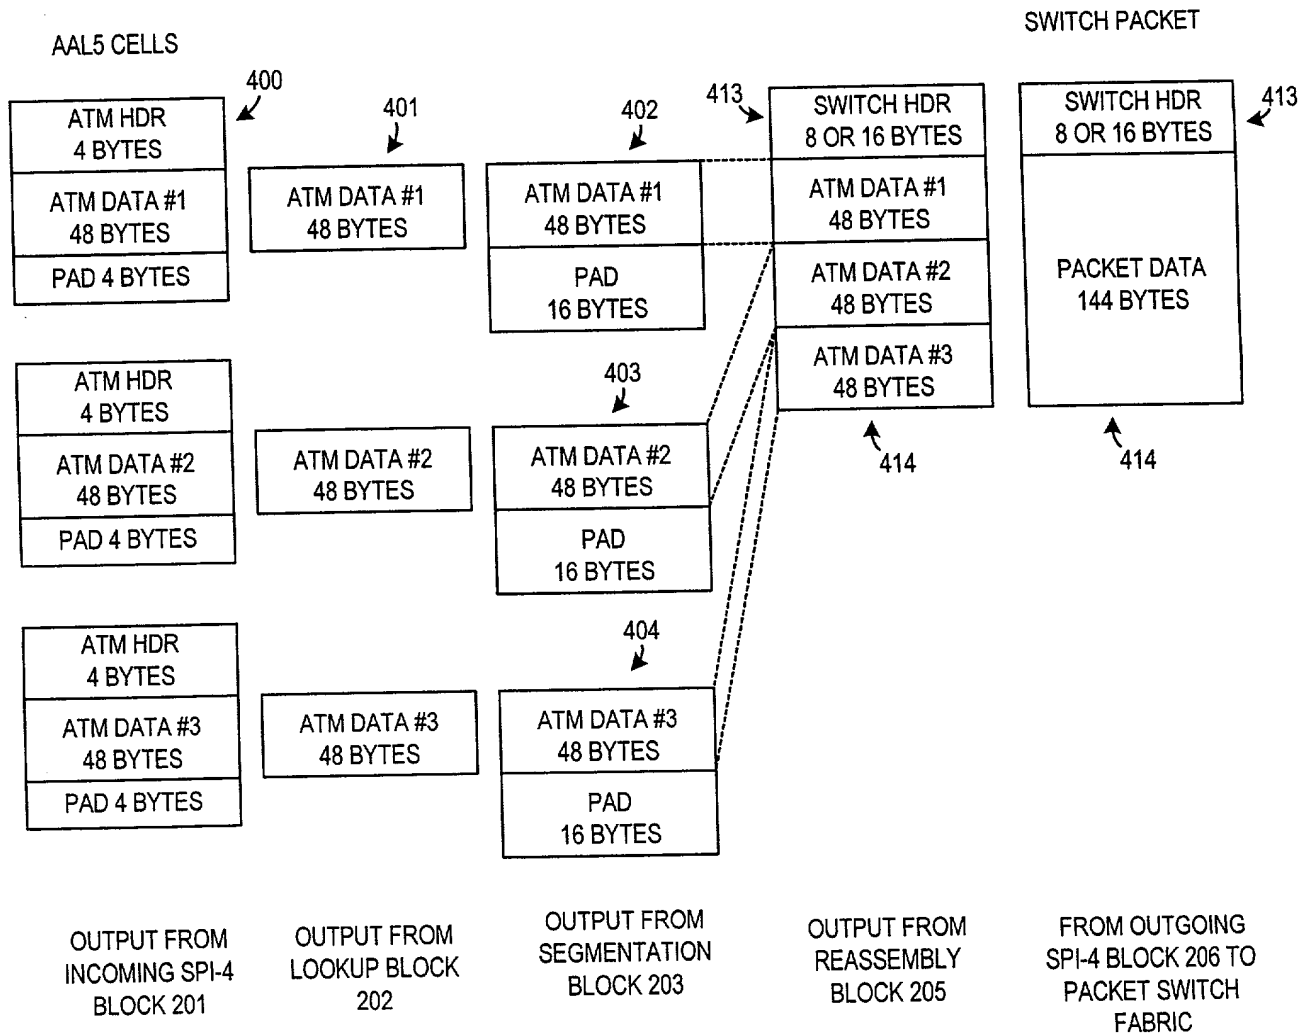

FLOW #1  
INGRESS APPLICATION TYPE 5


FIG. 39

16/45

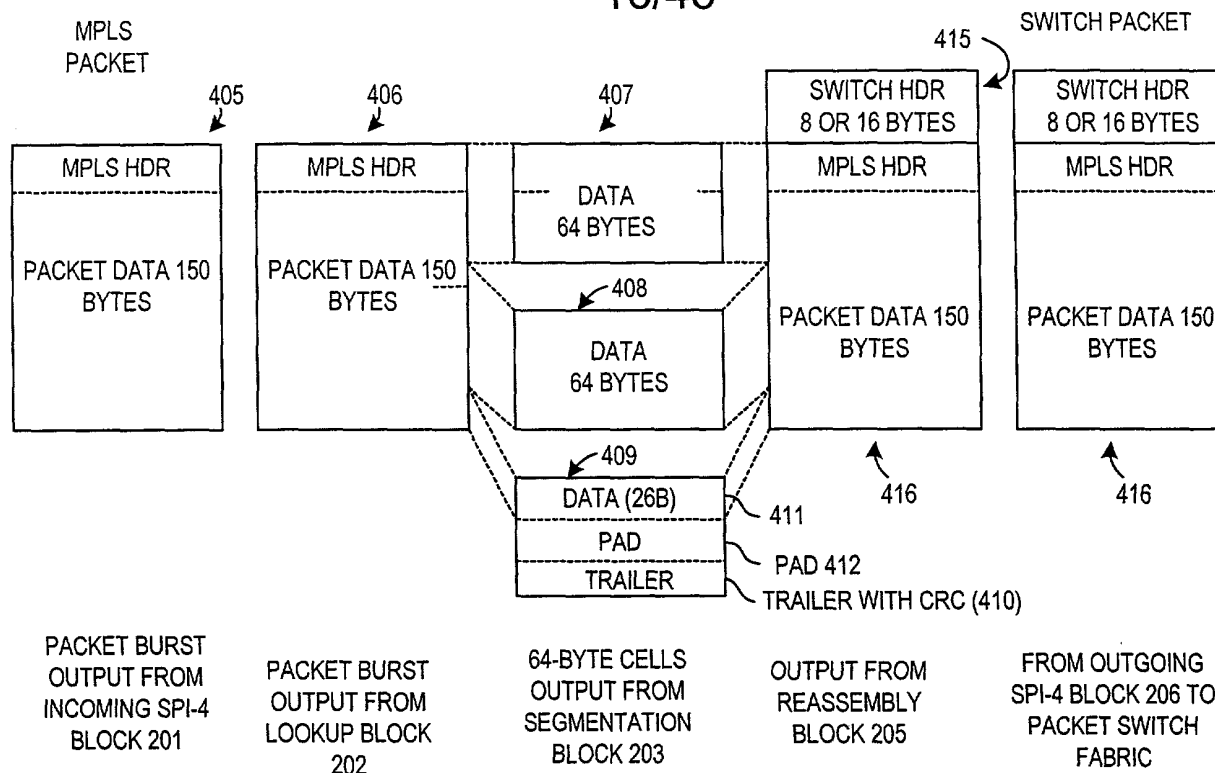

FLOW #2  
INGRESS APPLICATION TYPE 6

FIG. 40

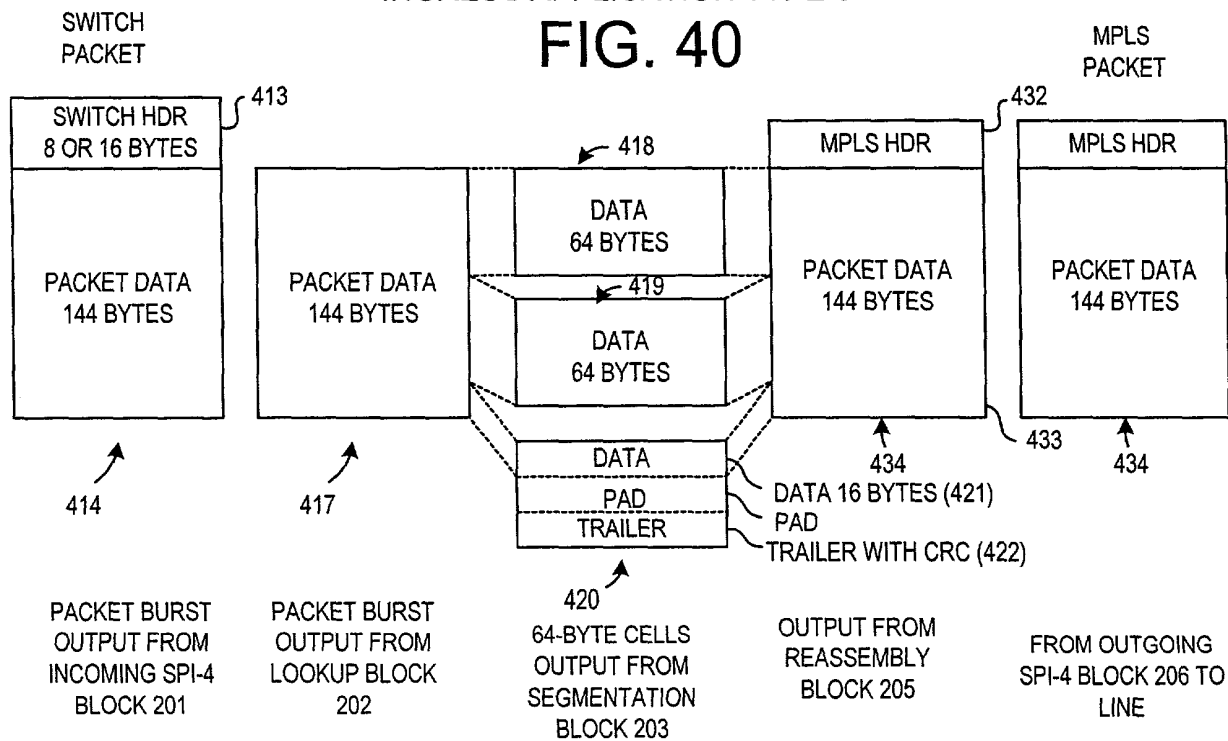


FLOW #1  
EGRESS APPLICATION TYPE 14

FIG. 41




17/45

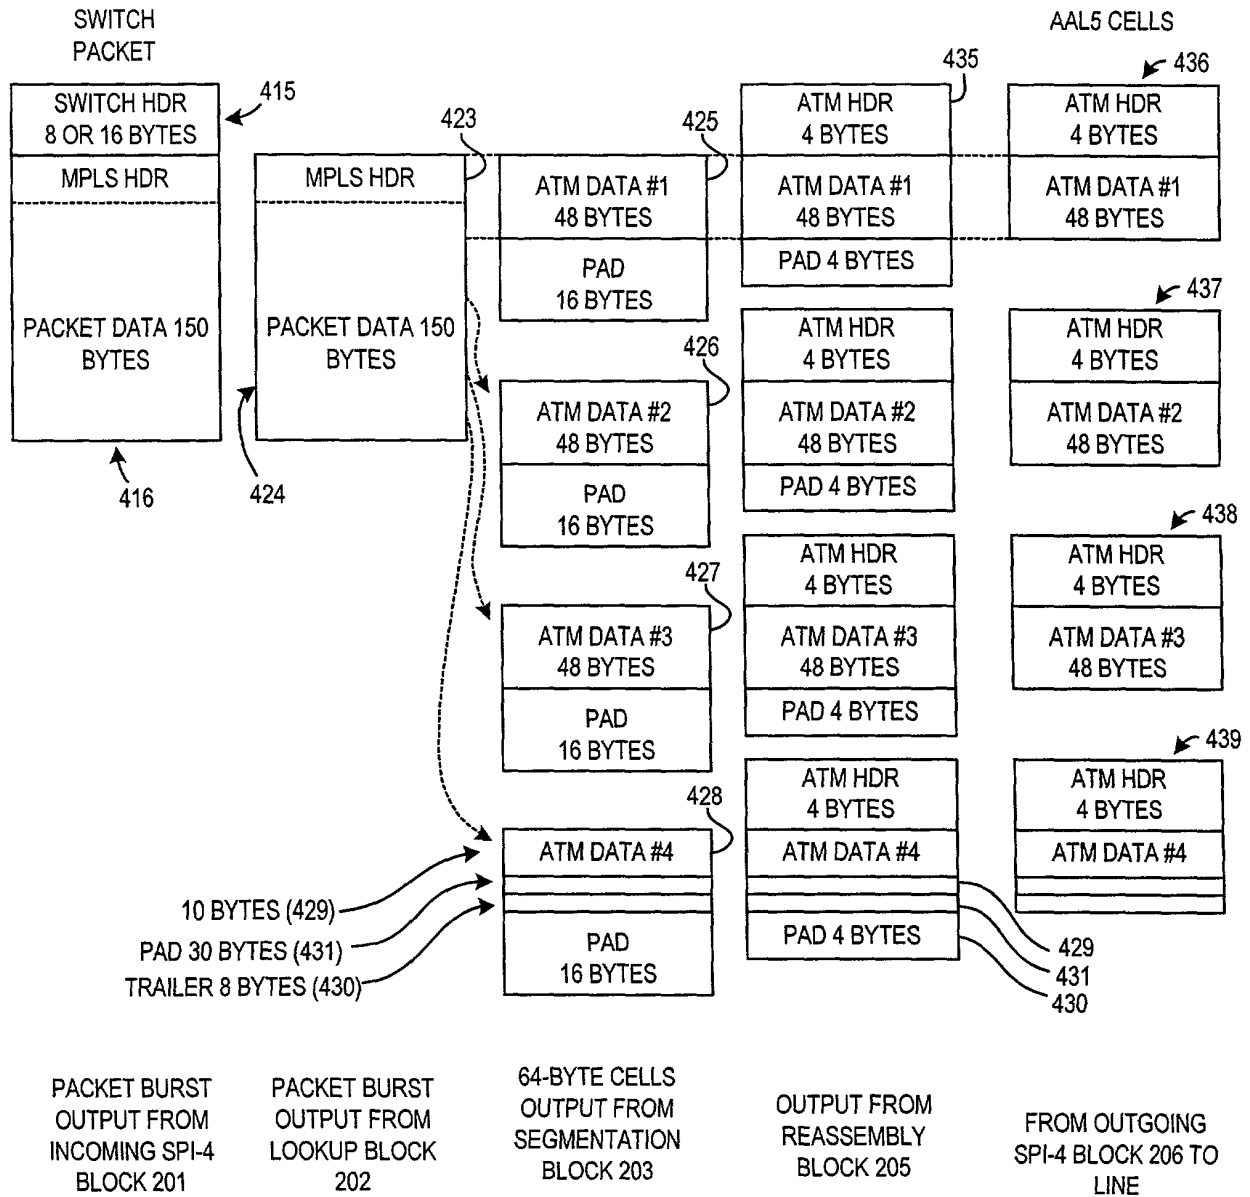


FLOW #2  
EGRESS APPLICATION TYPE 13

FIG. 42

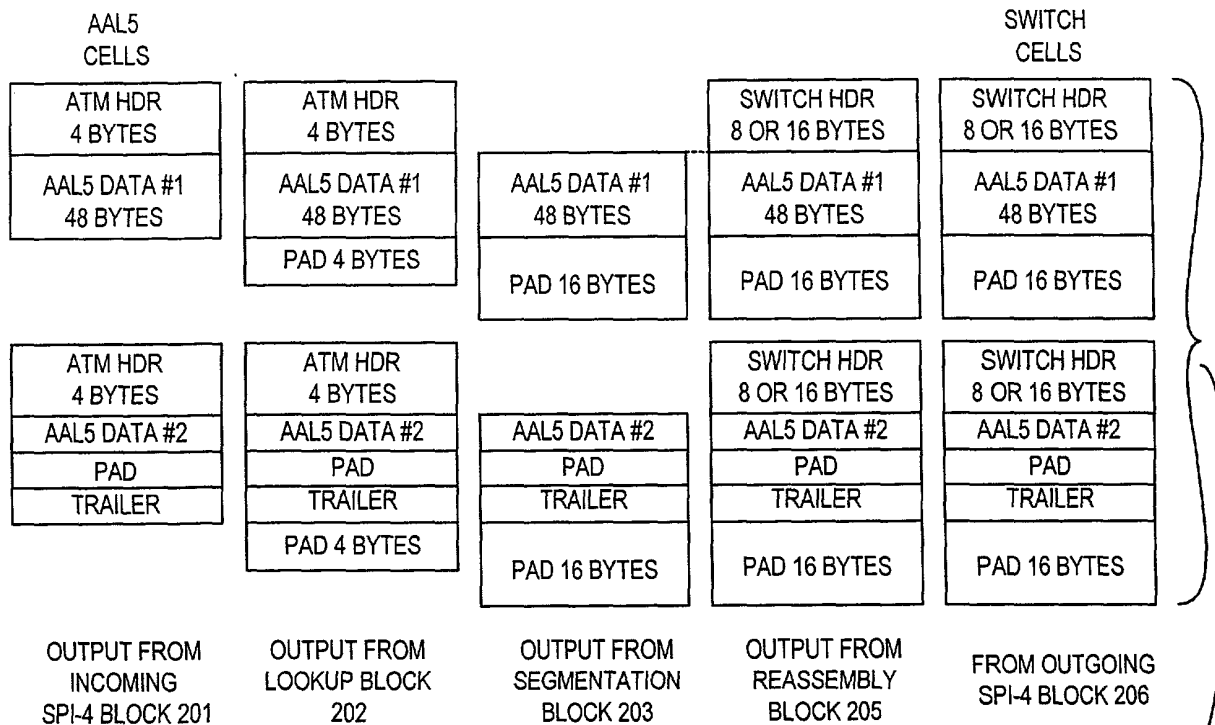


INGRESS APPLICATION TYPE 1

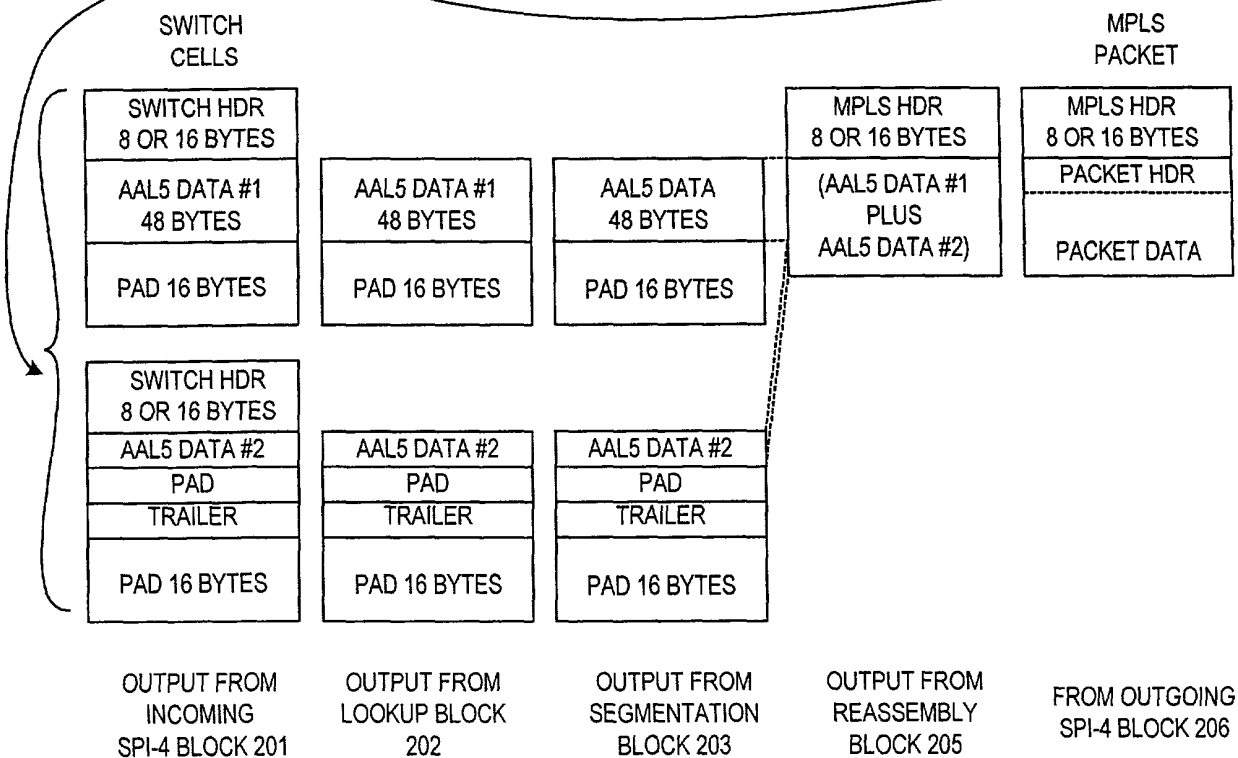


EGRESS APPLICATION TYPE 9

FIG. 43

19/45

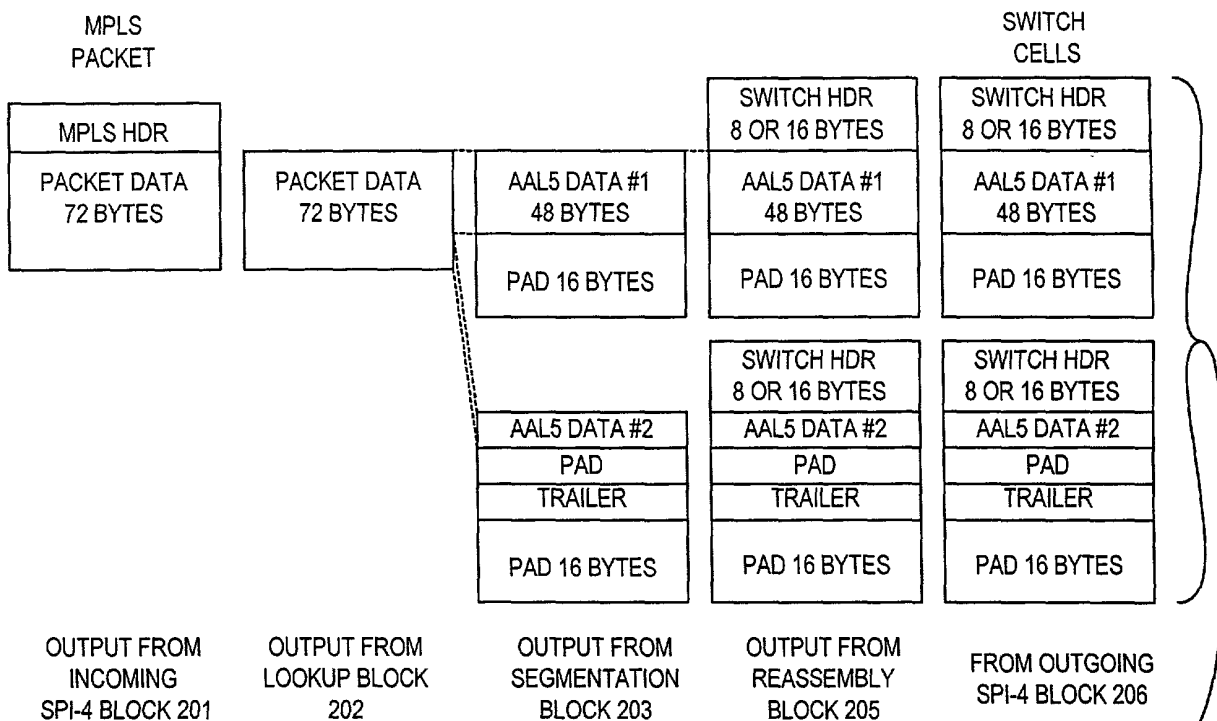

## INGRESS APPLICATION TYPE 2

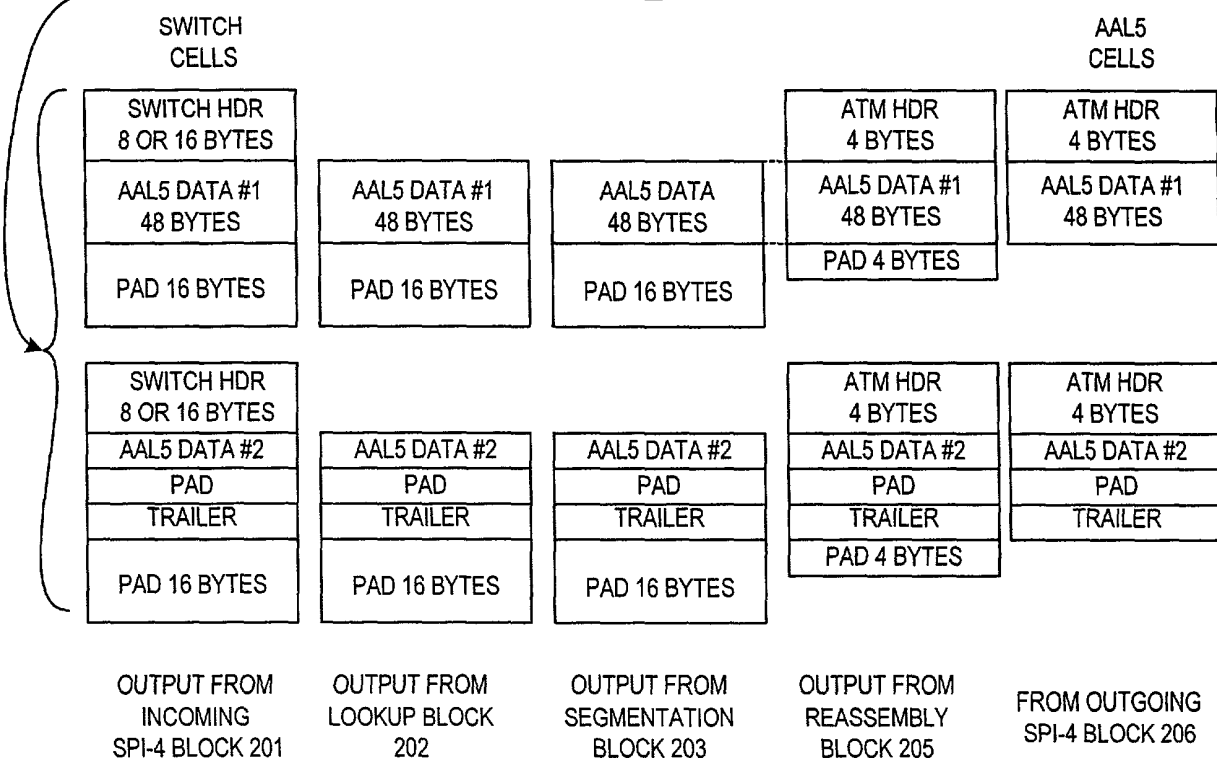

## EGRESS APPLICATION TYPE 10

FIG. 44

TOTAL "E" 292660

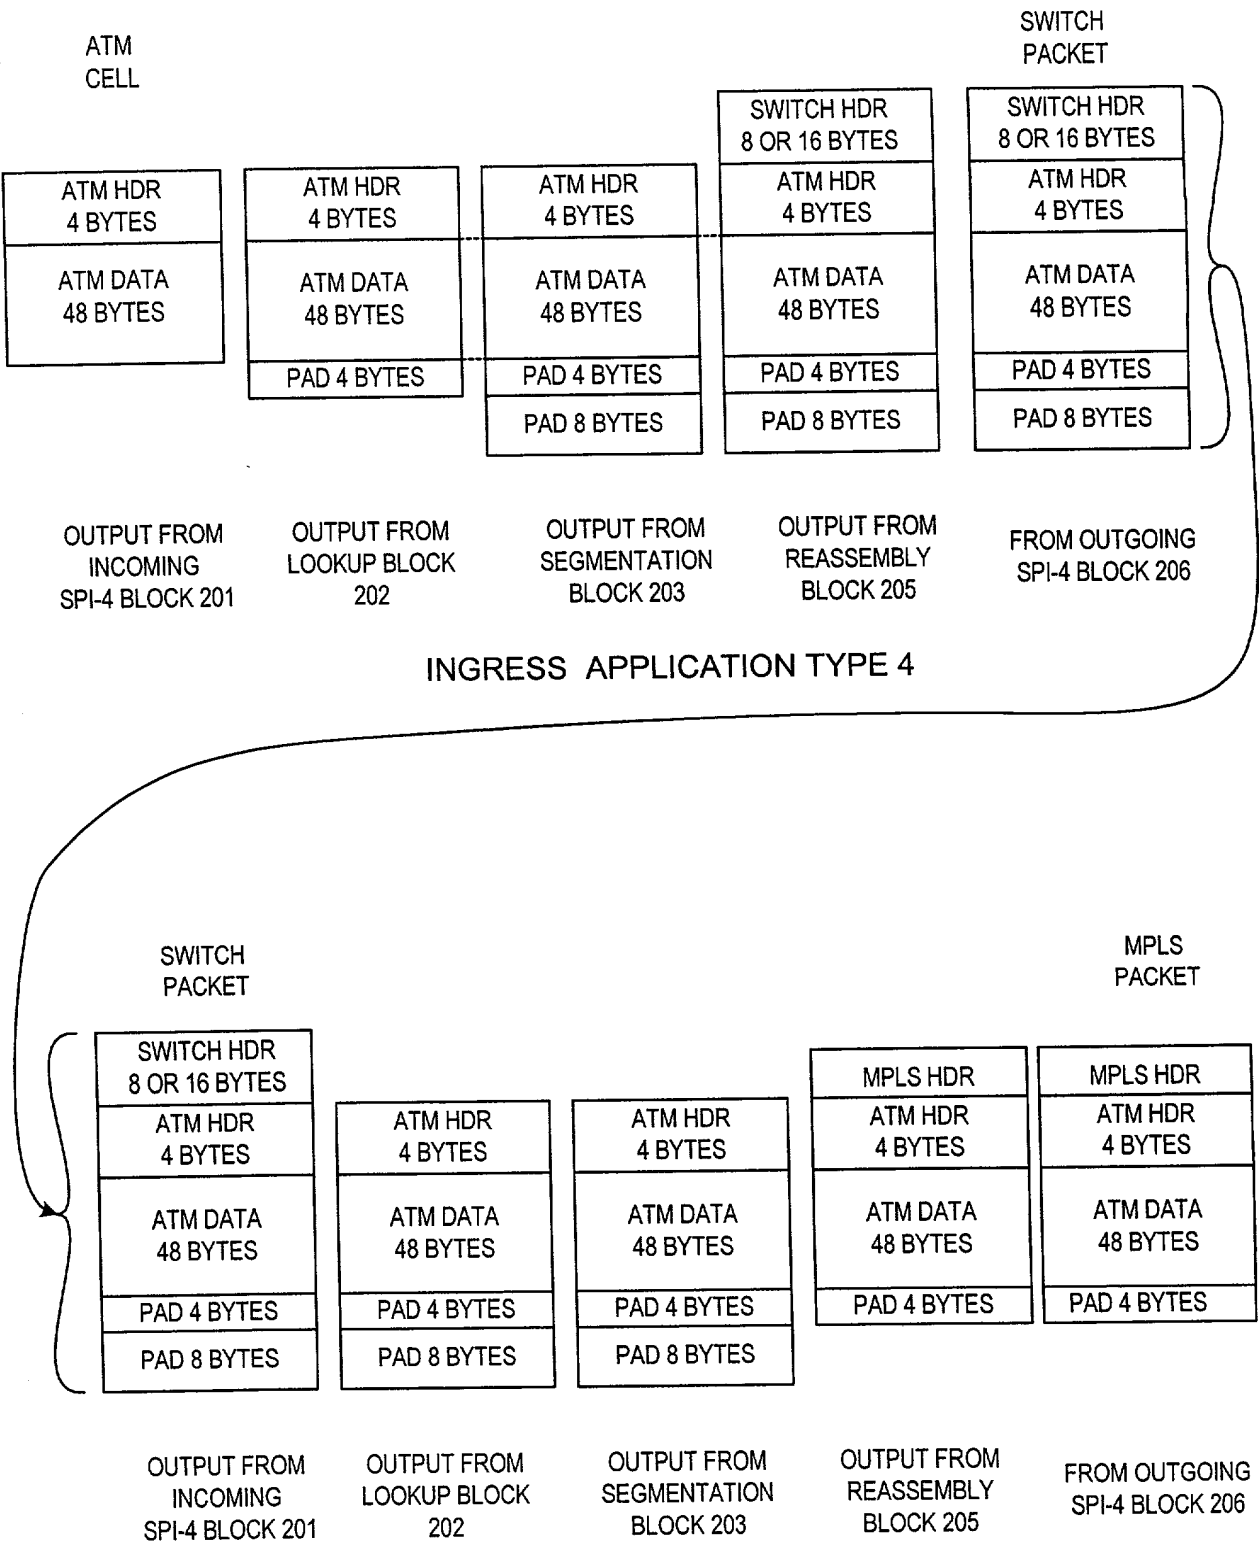


FIG. 45

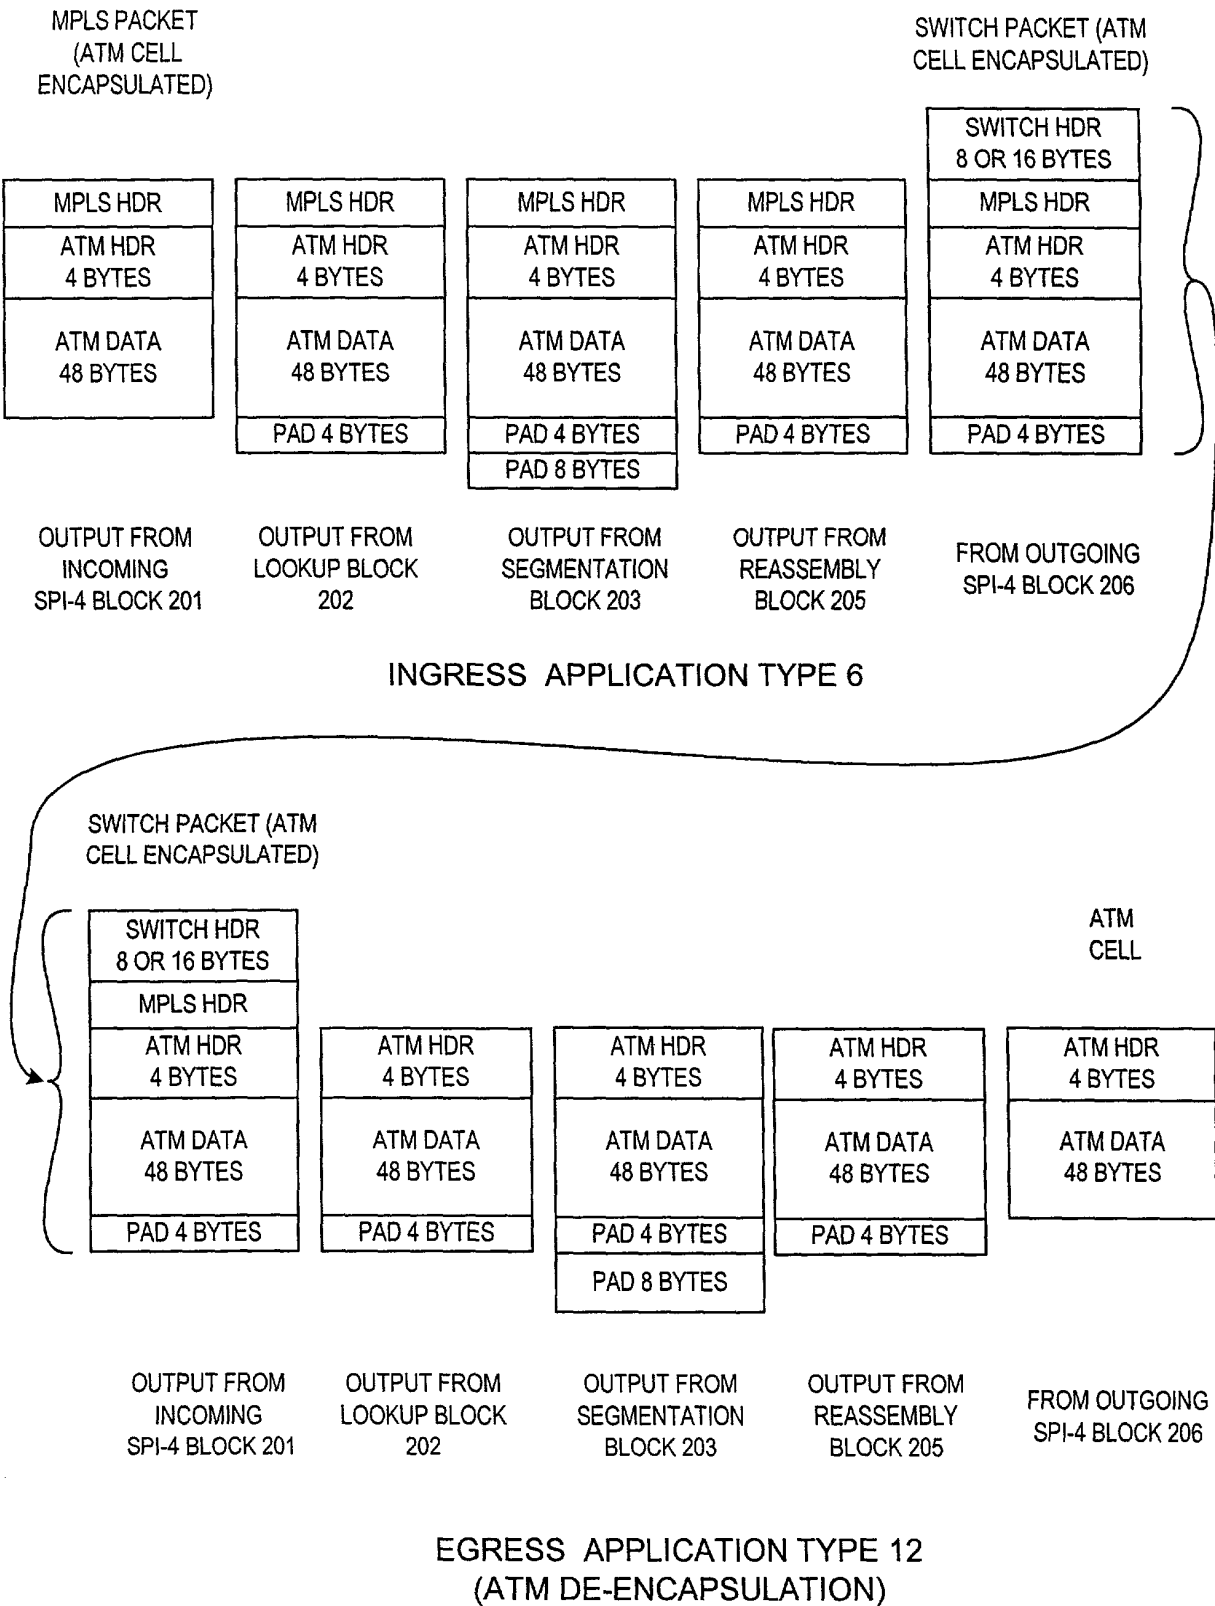


FIG. 46

22/45

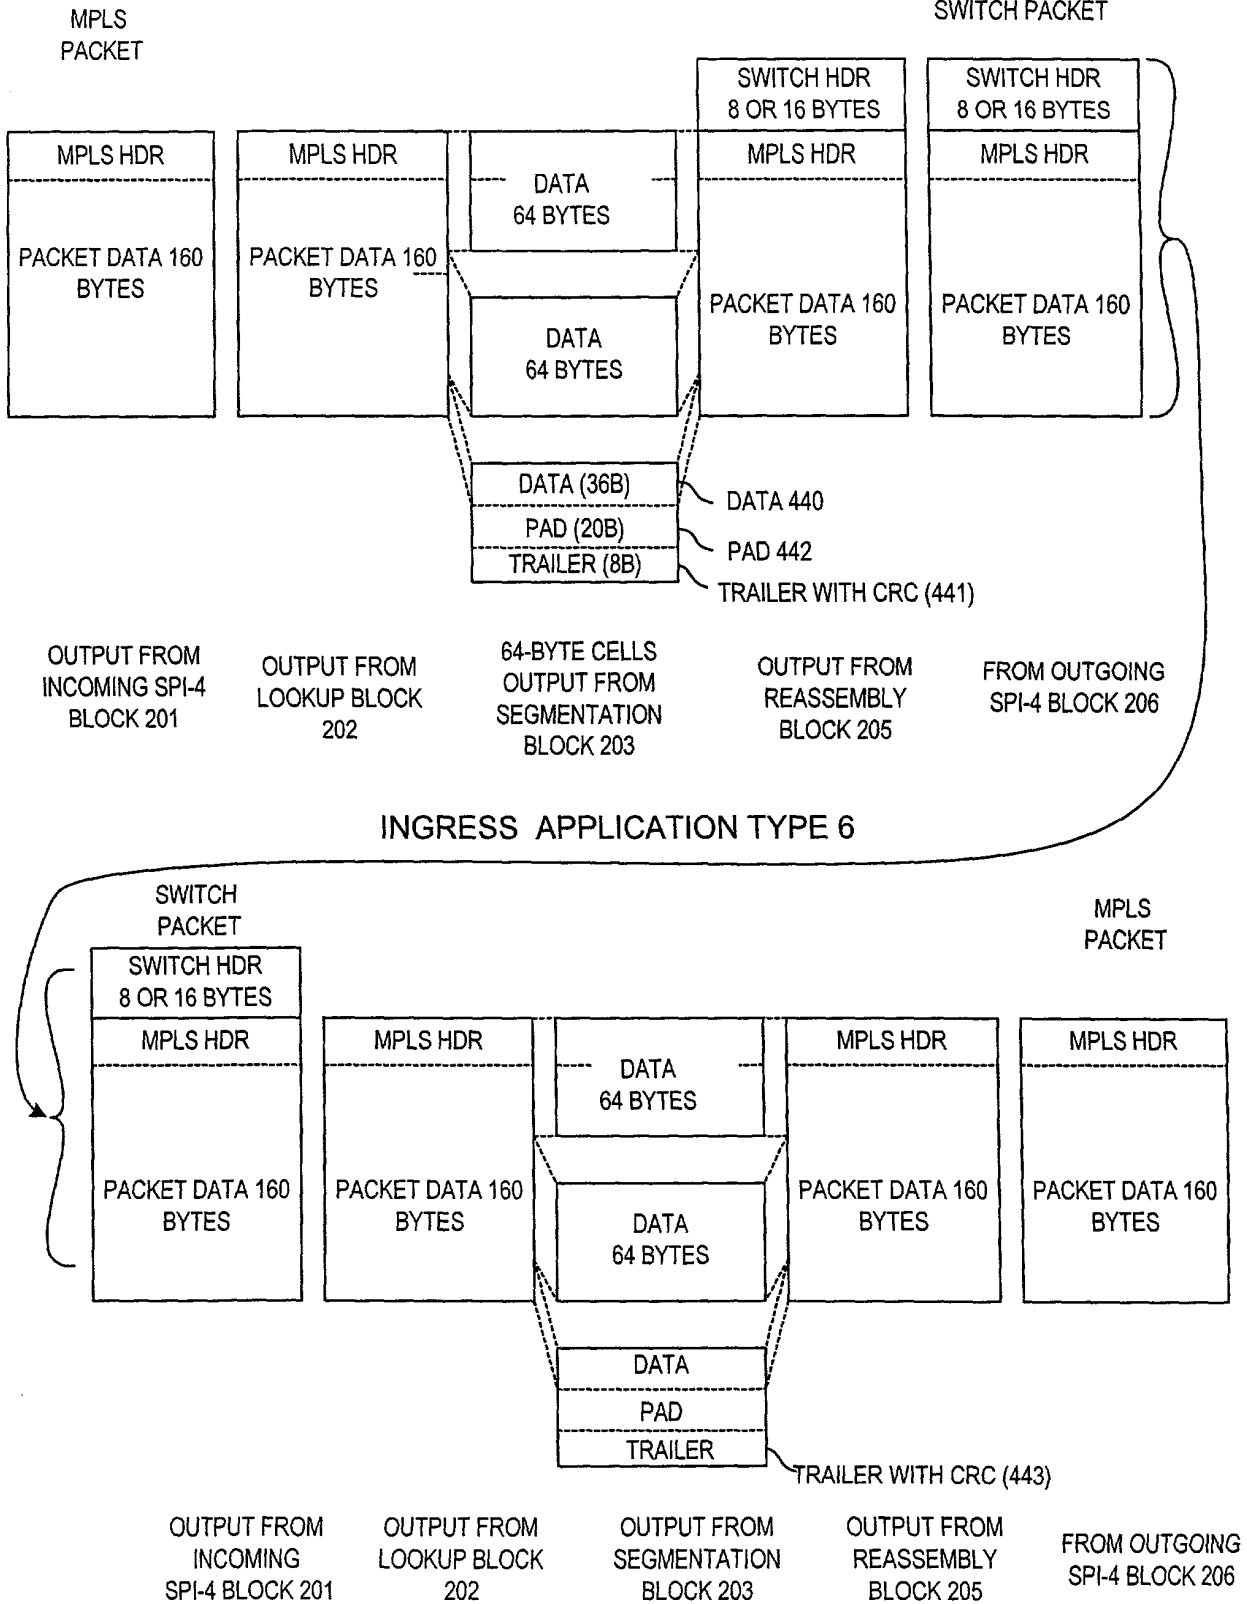


FIG. 47

23/45

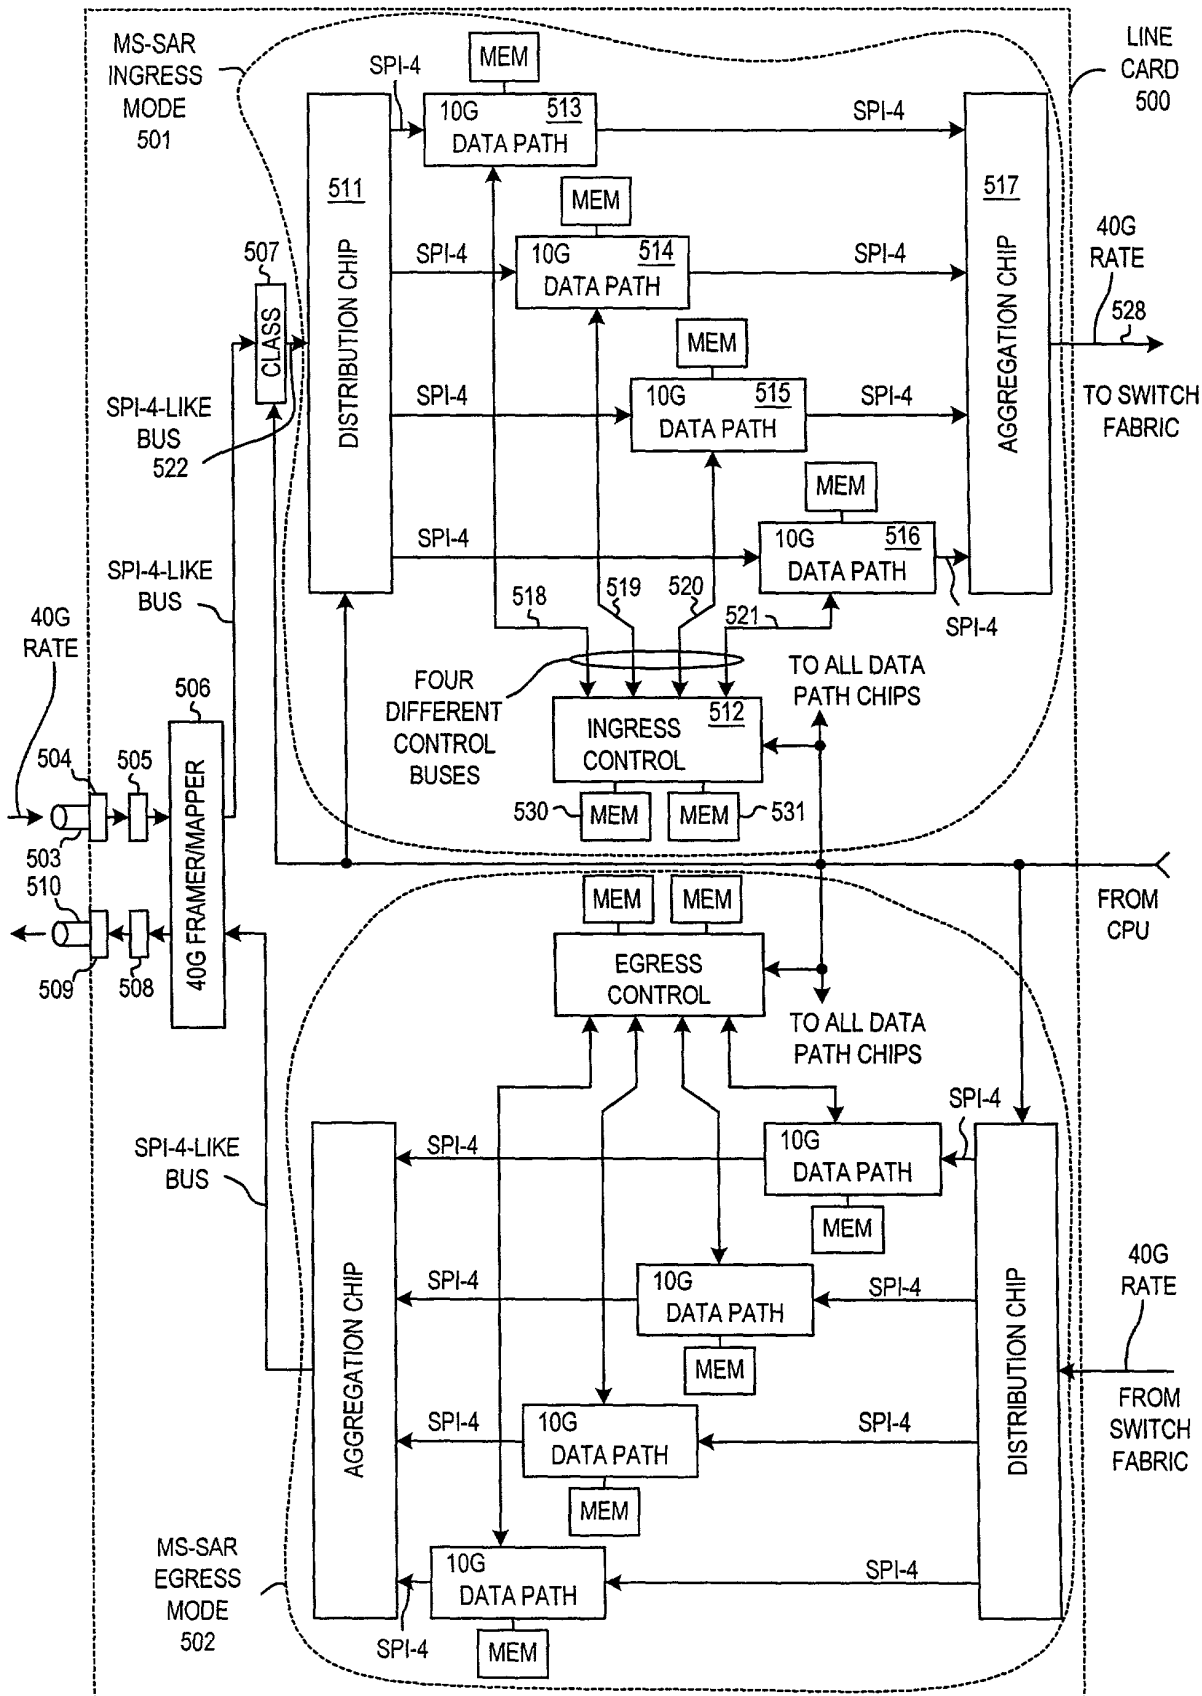


FIG. 48



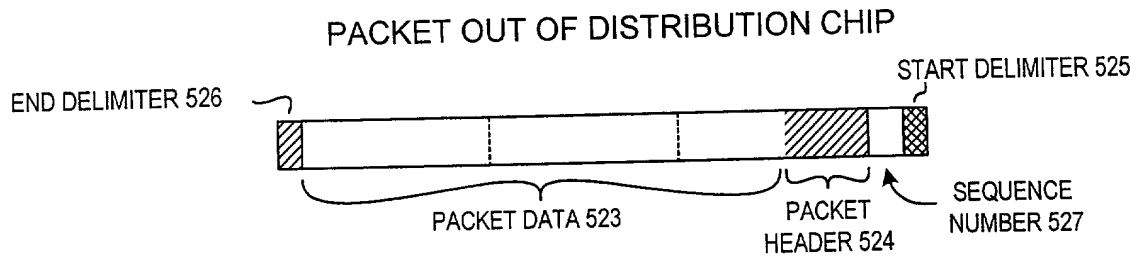


FIG. 49

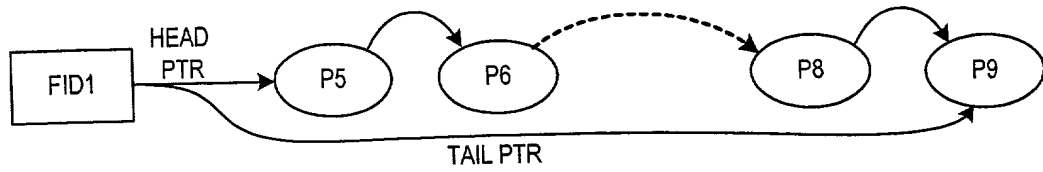

PACKET QUEUE

FIG. 50

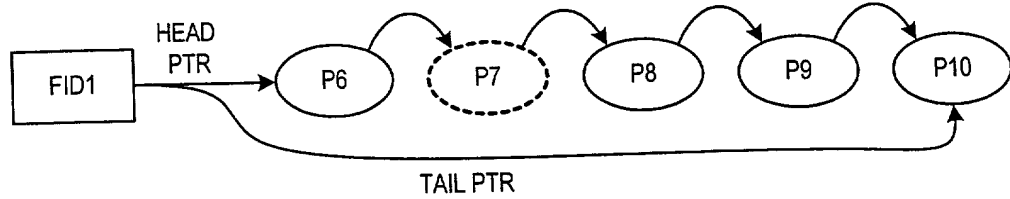

PACKET QUEUE

FIG. 51

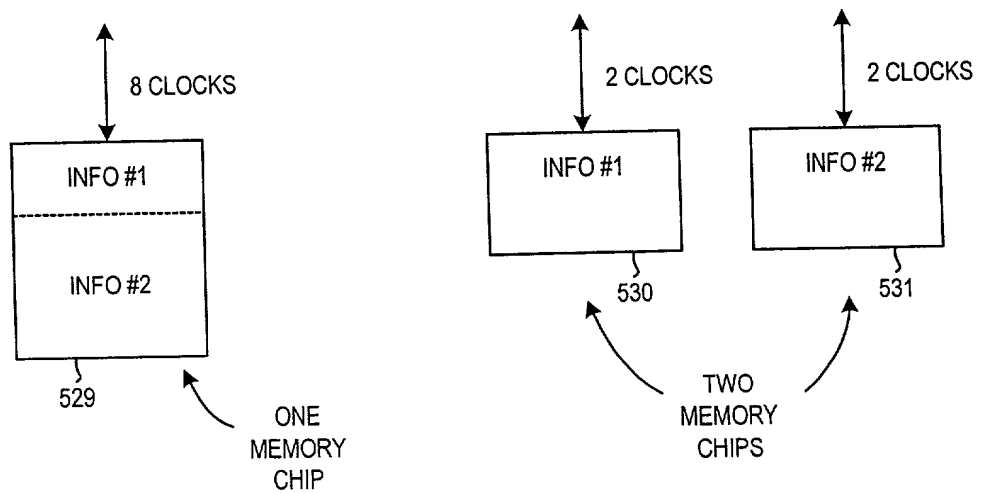


FIG. 52

FIG. 49




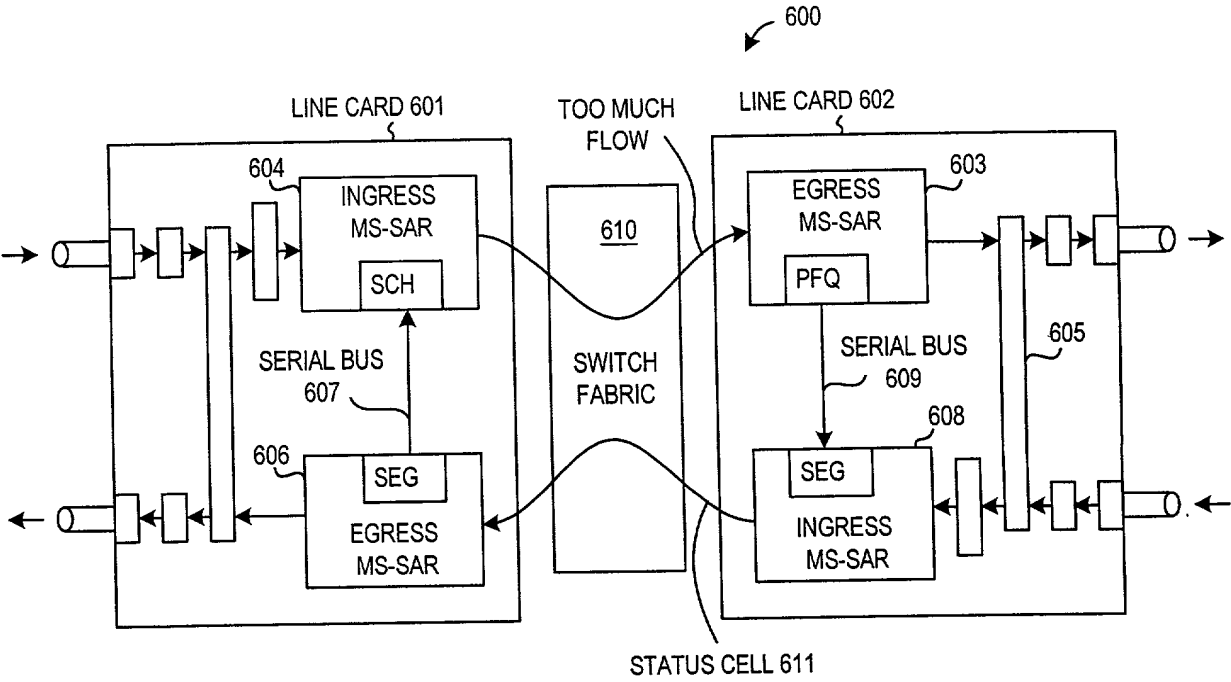


FIG. 53


FIG. 53

FIG. 54

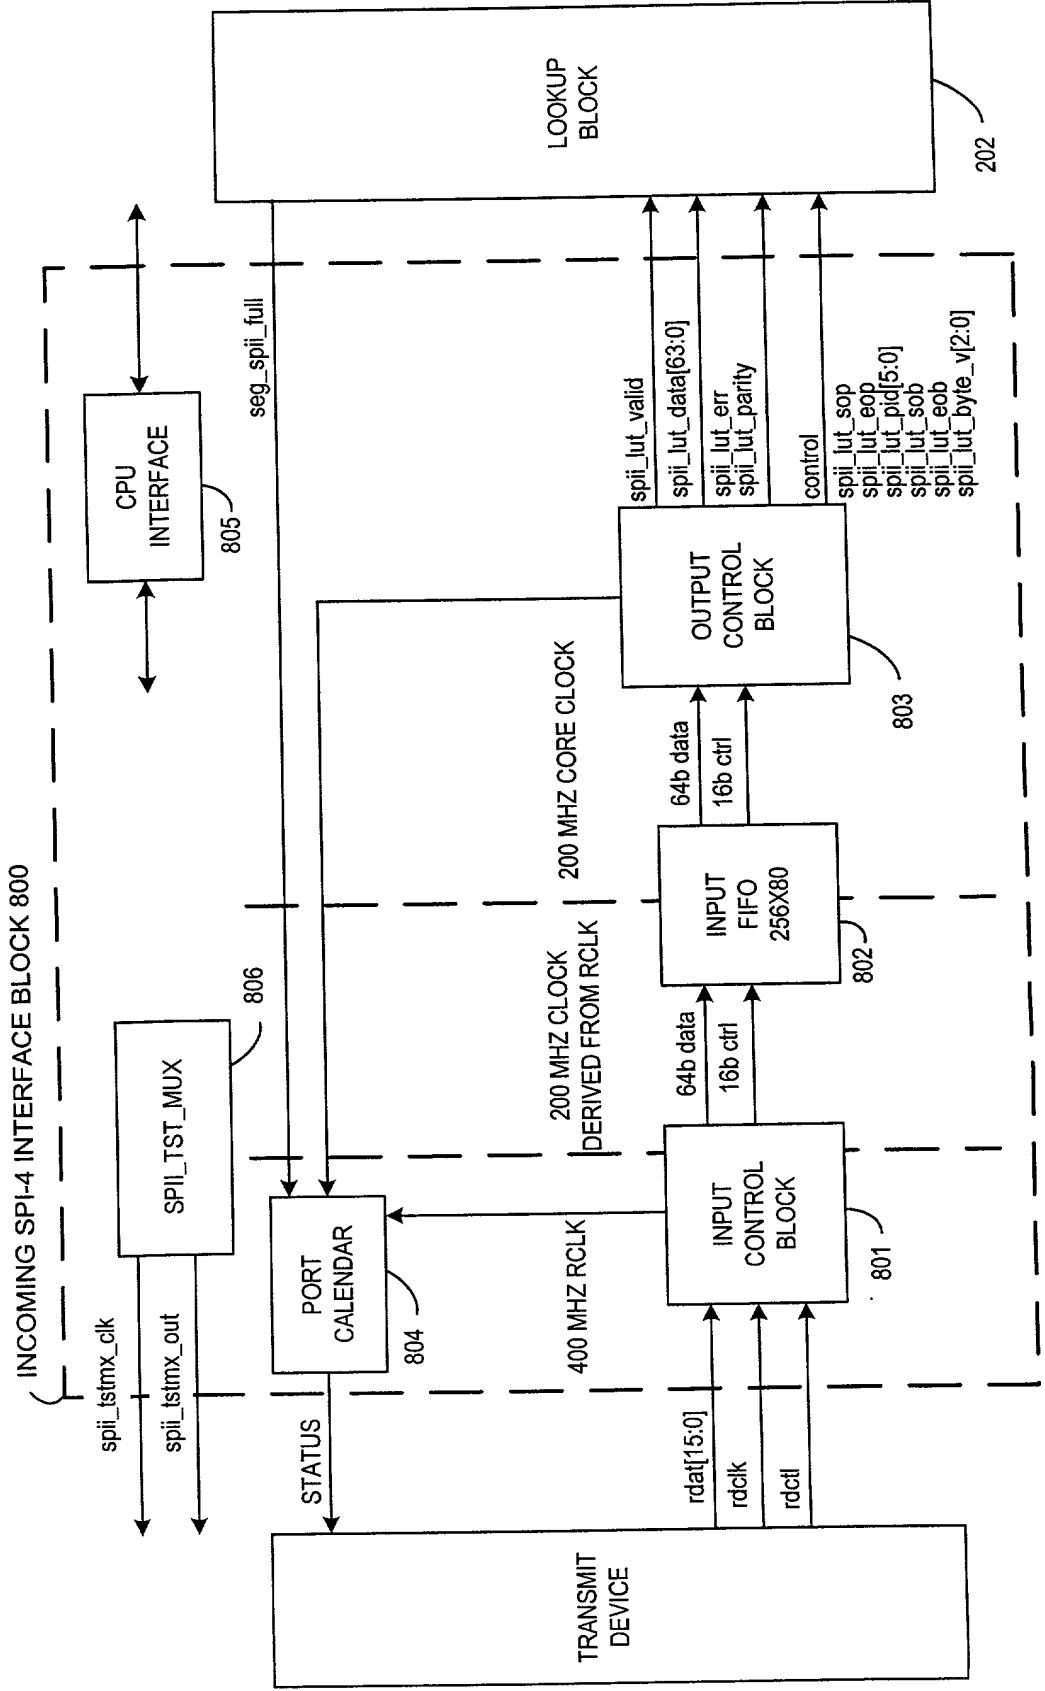


INCOMING SPI-4 INTERFACE BLOCK

FIG. 54

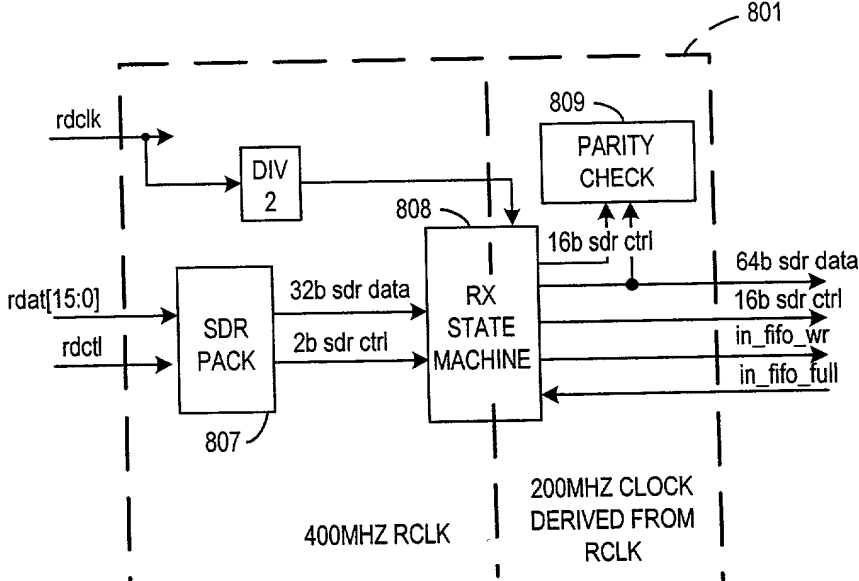


## INPUT CONTROL BLOCK

FIG. 55

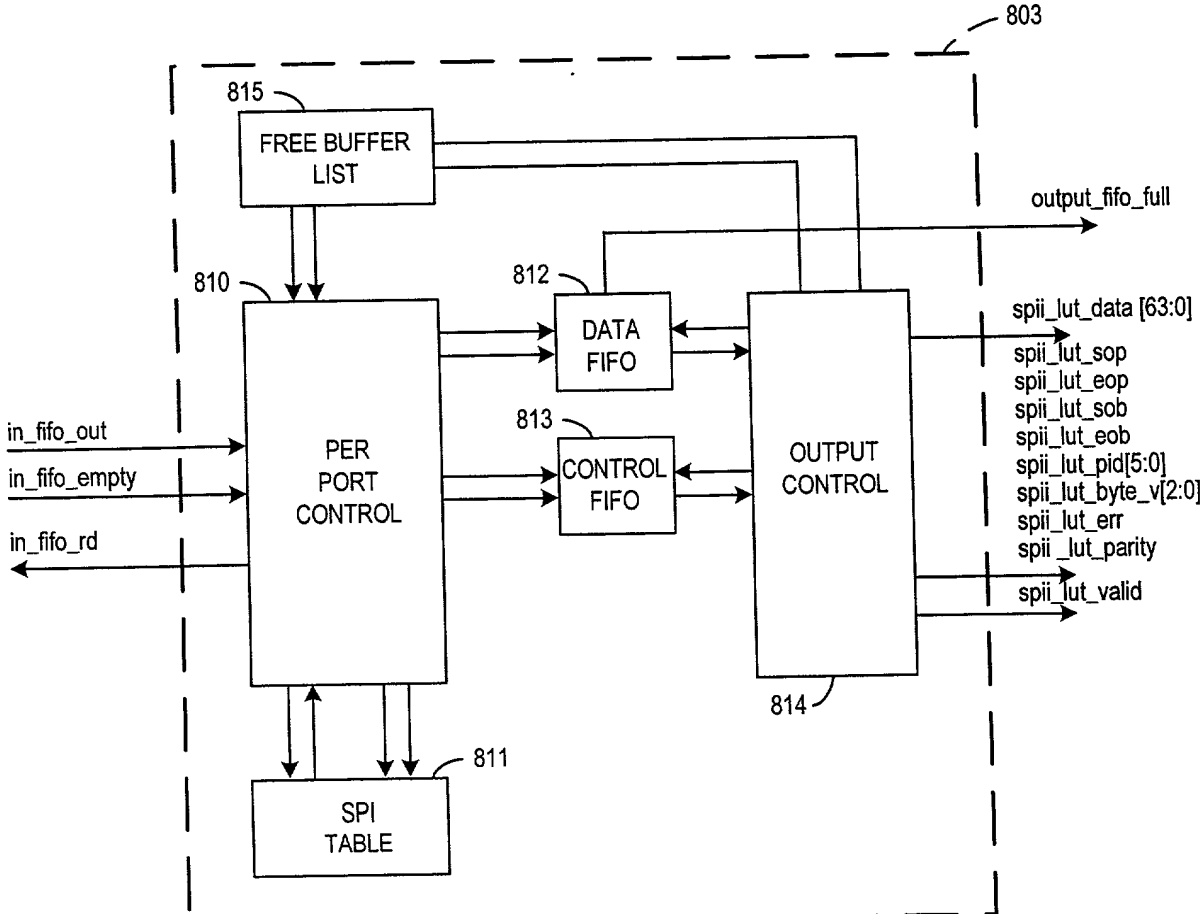

### OUTPUT CONTROL BLOCK

FIG. 56

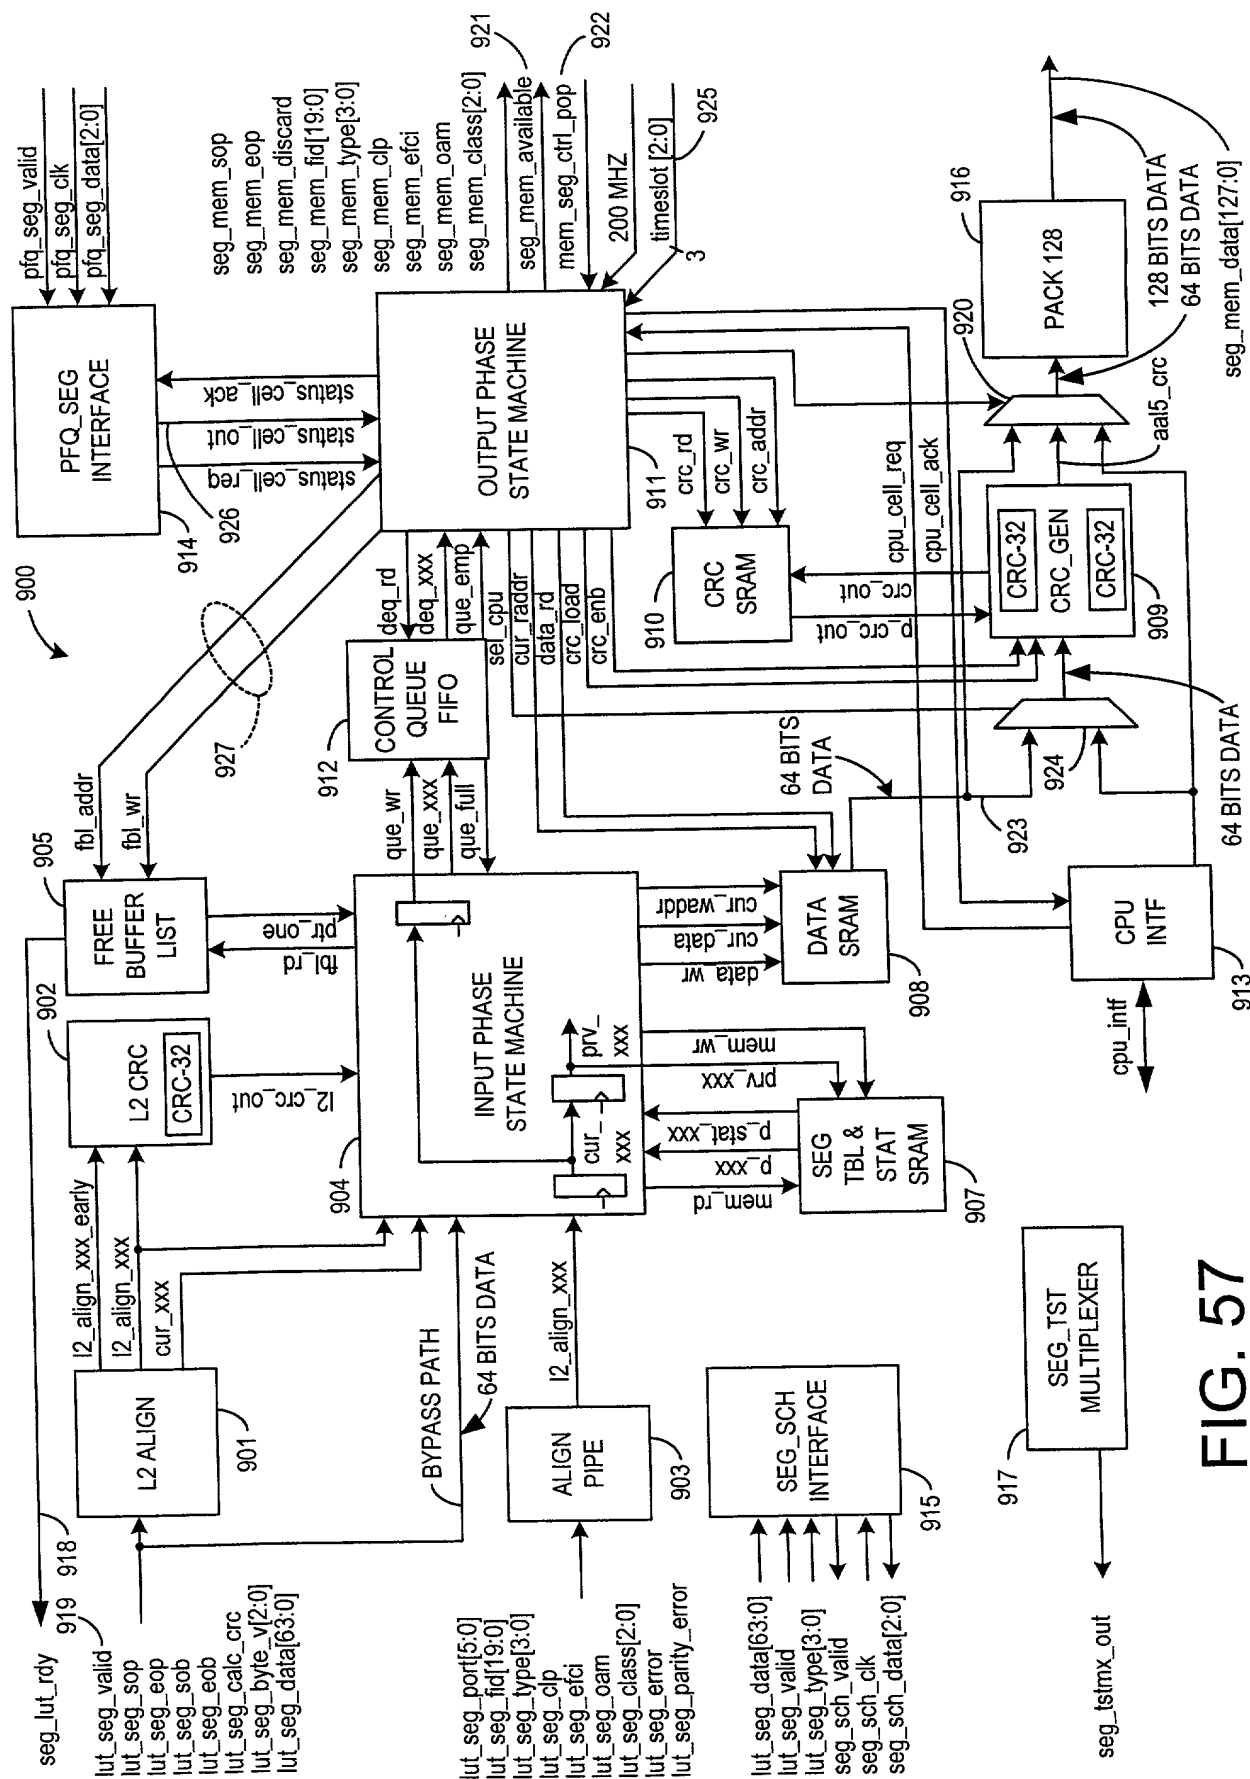

**FIG. 57**  
SEGMENTATION BLOCK

FIG. 58

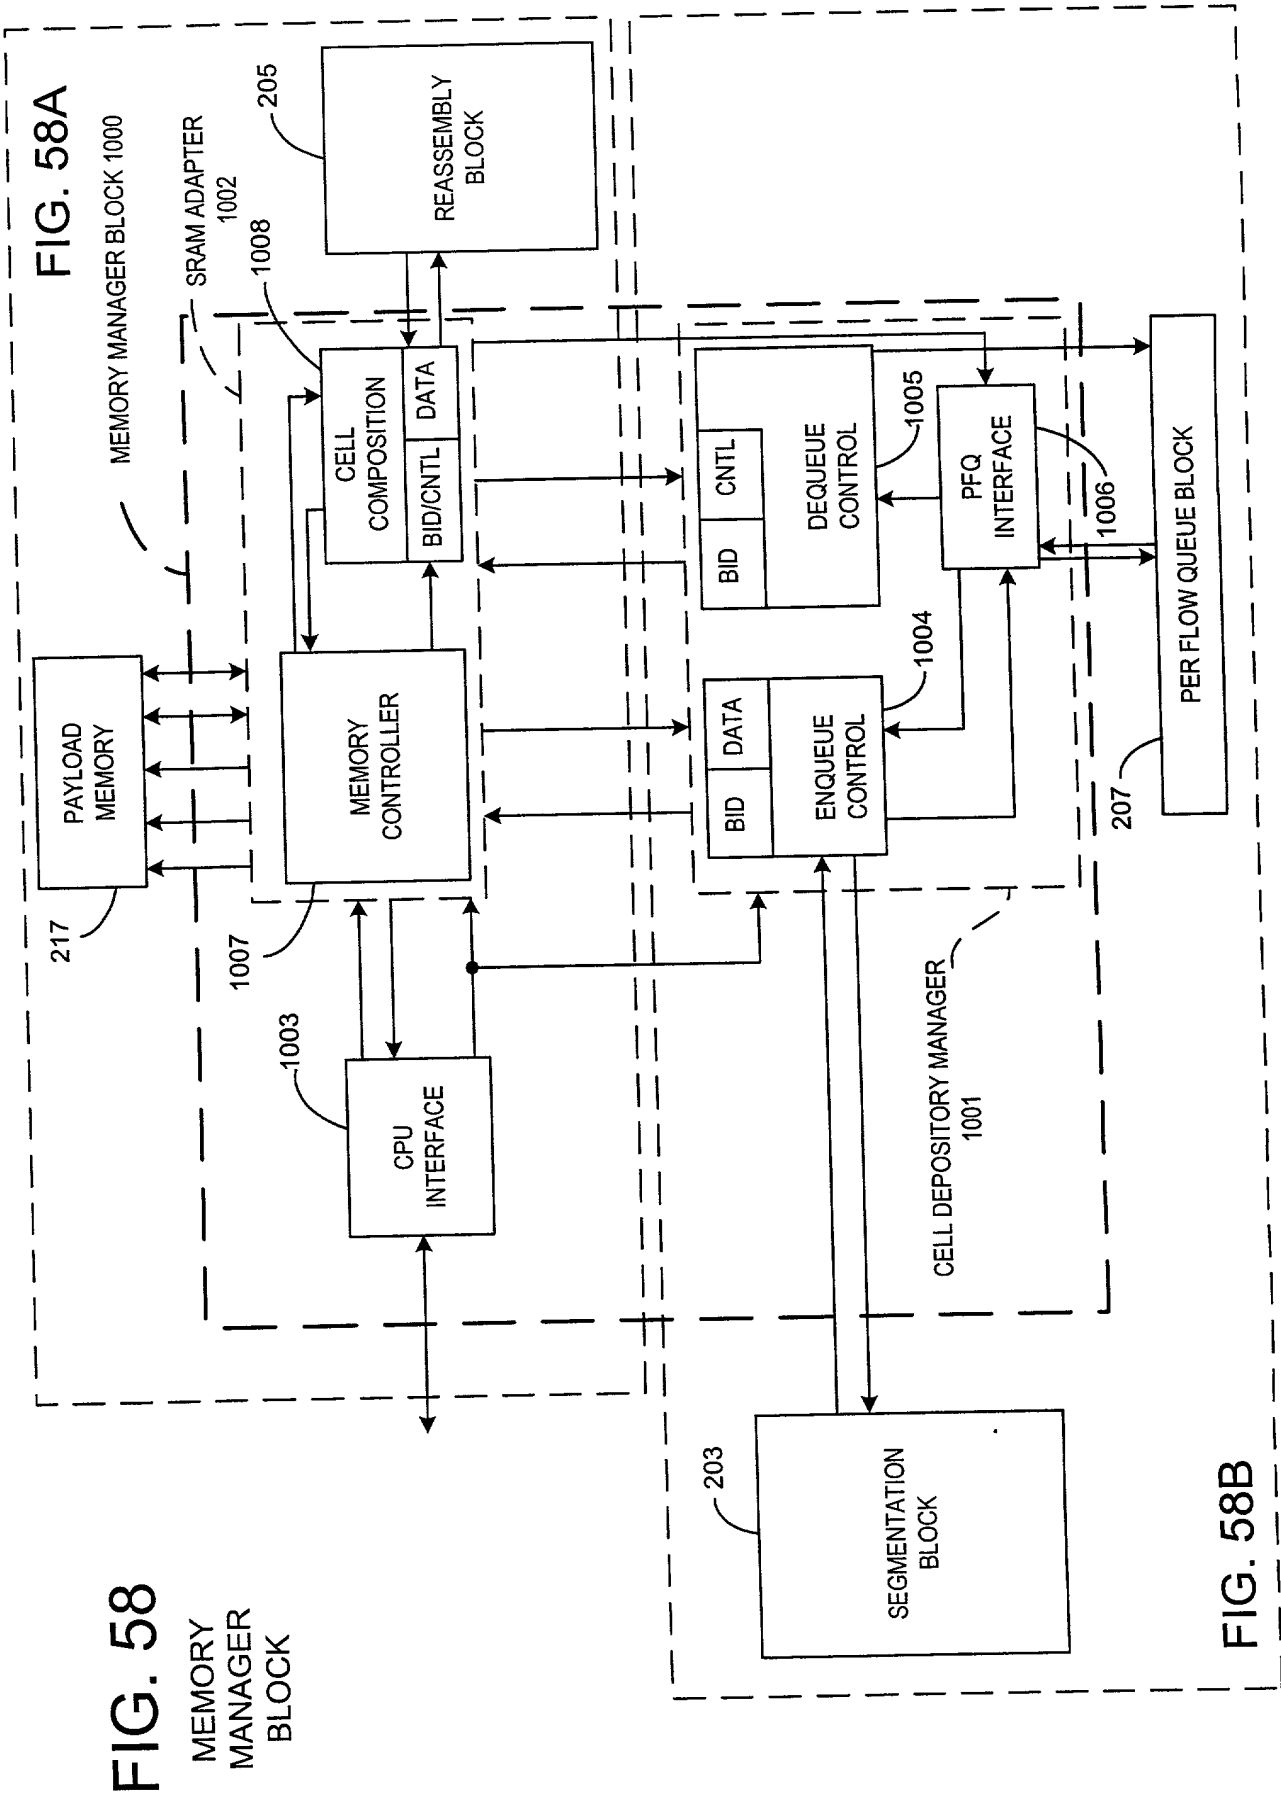


FIG. 58A  
MEMORY MANAGER BLOCK


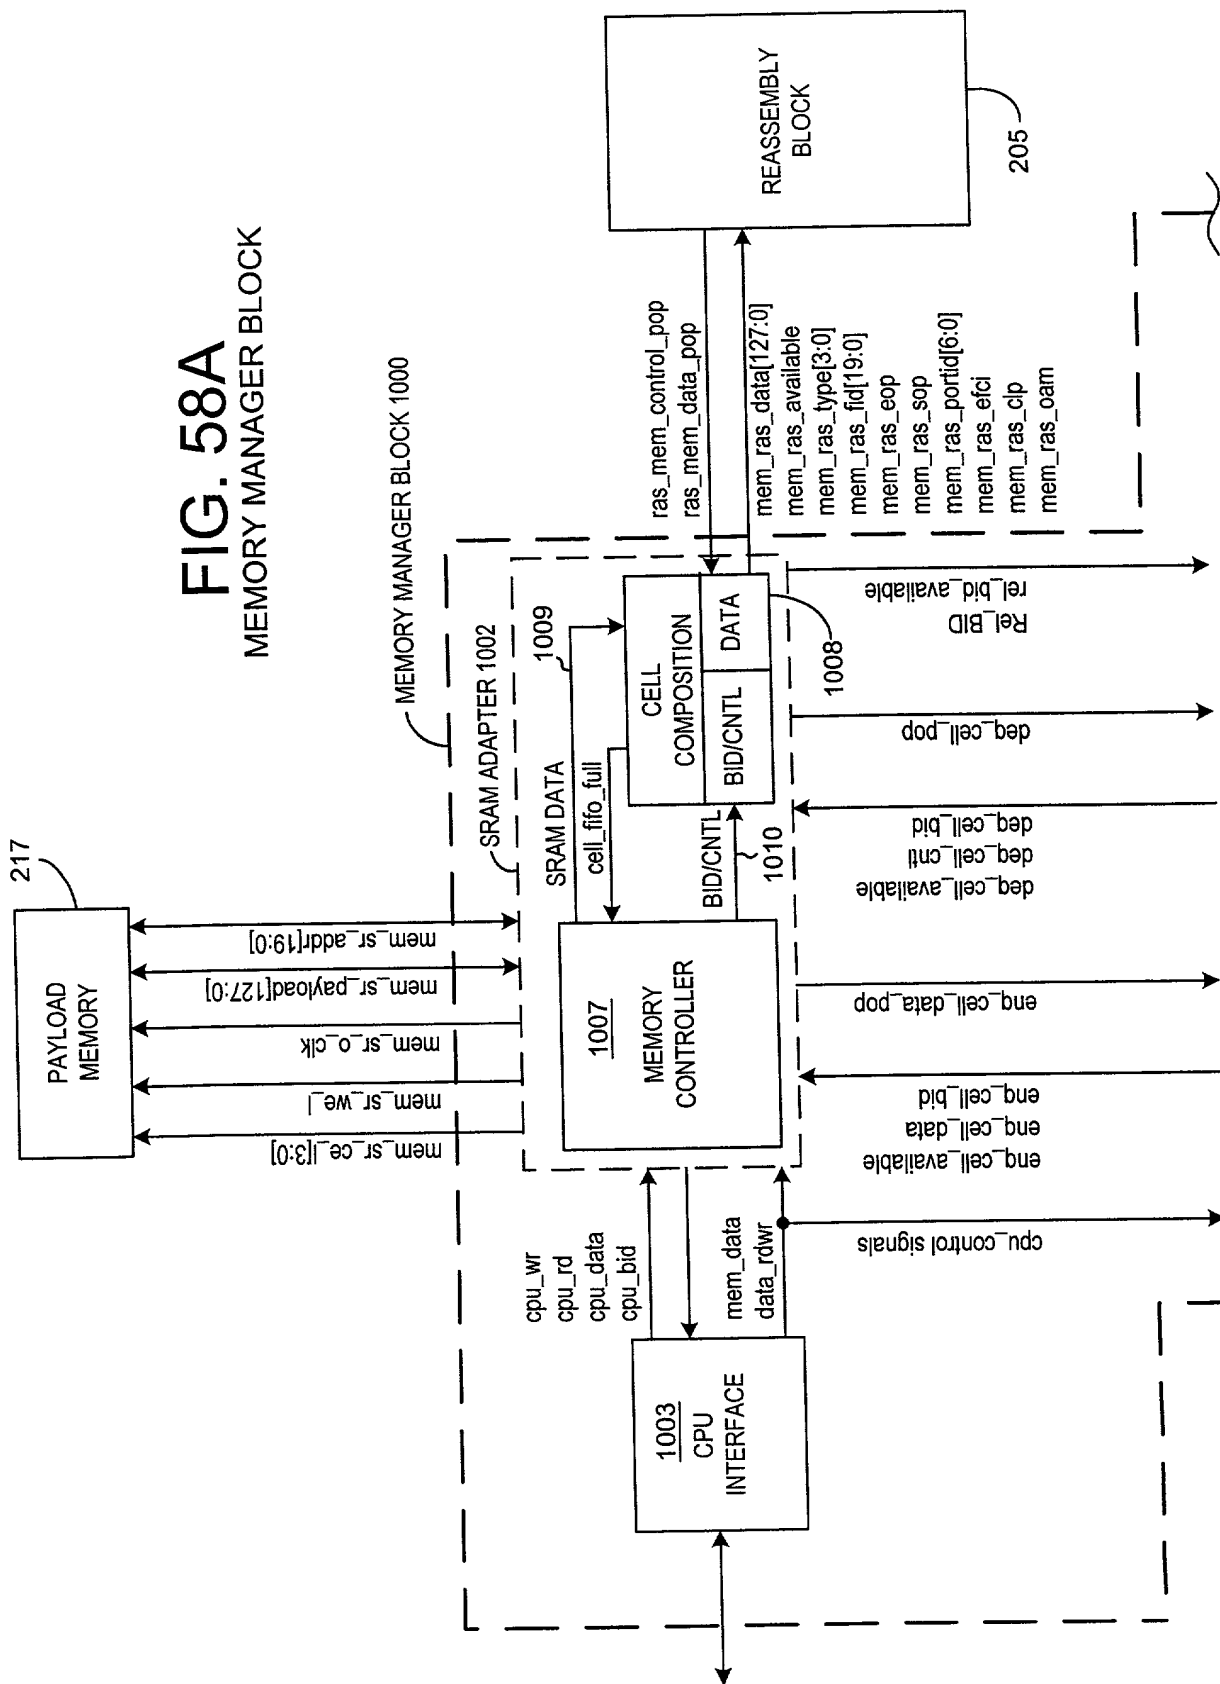



FIG. 58B

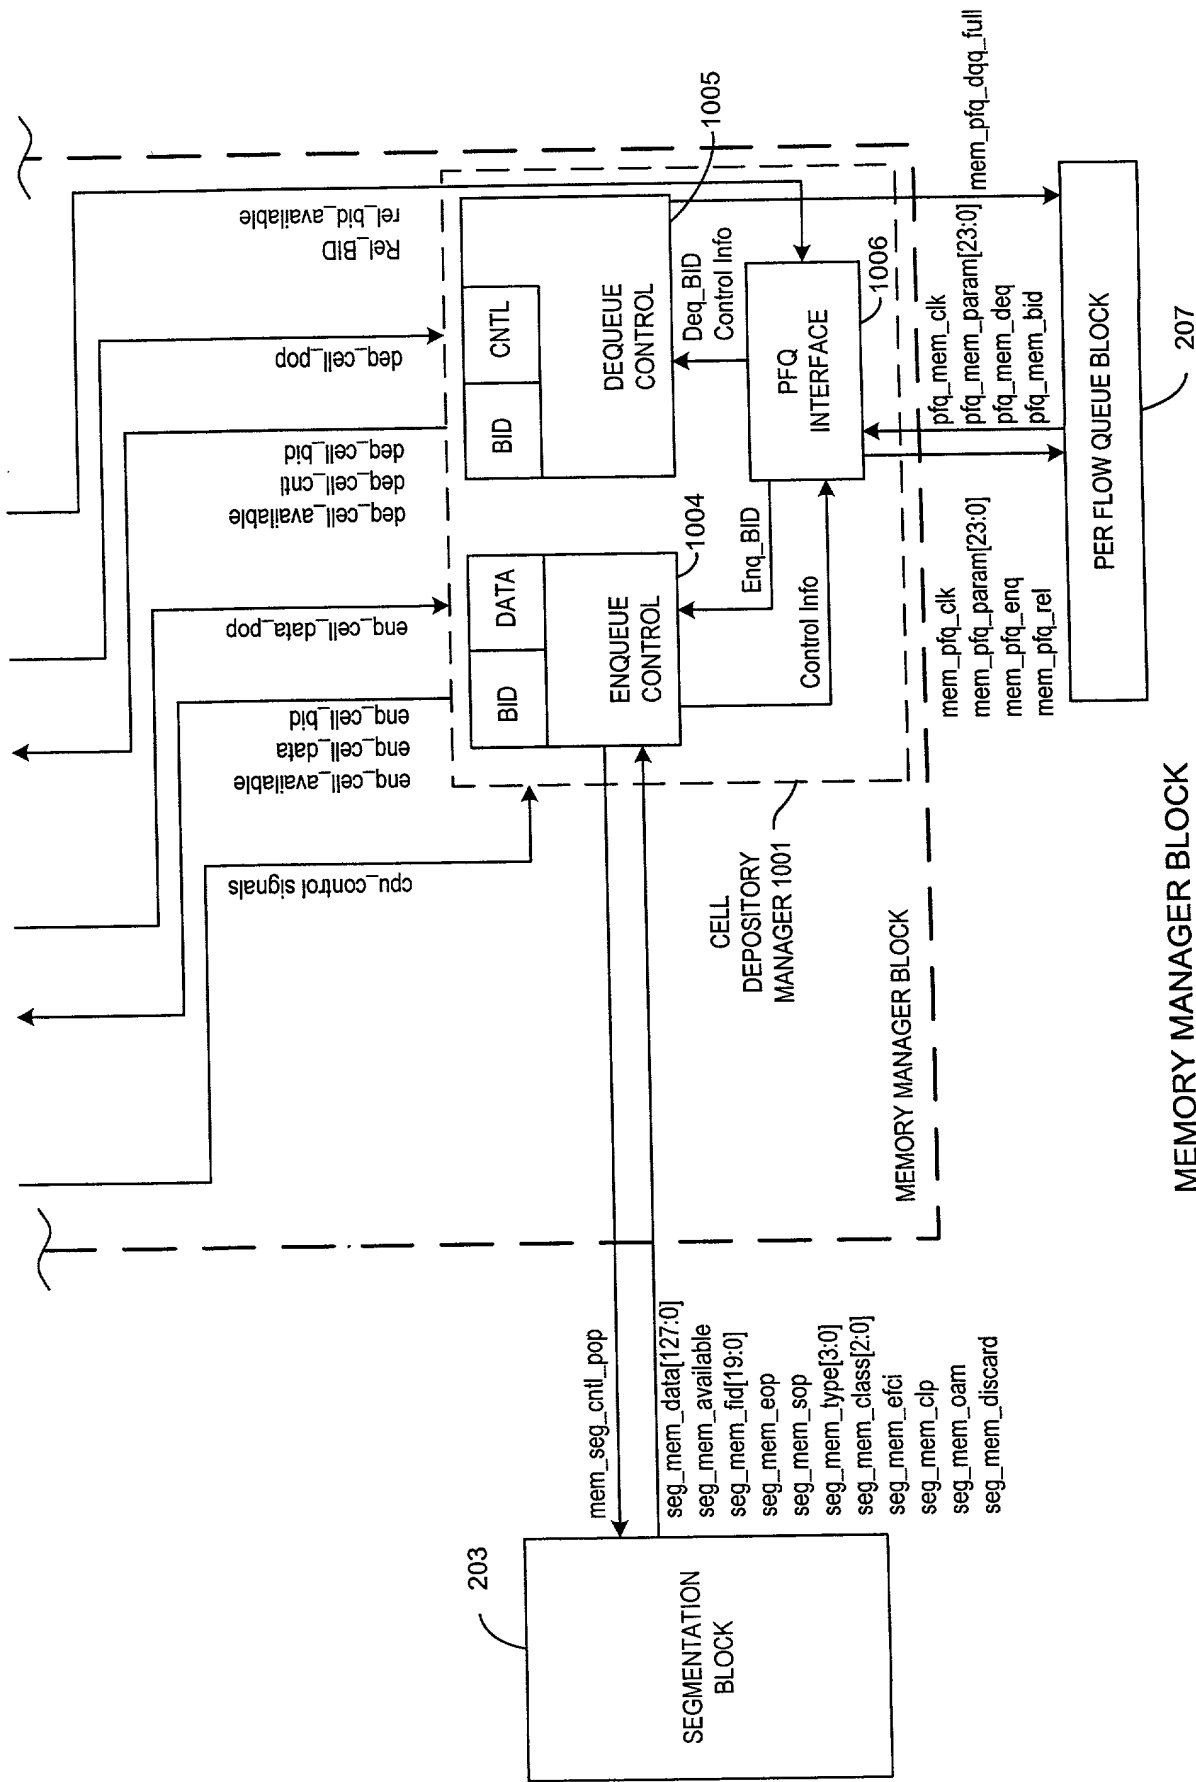

MEMORY MANAGER BLOCK

FIG. 58B

FIG. 59

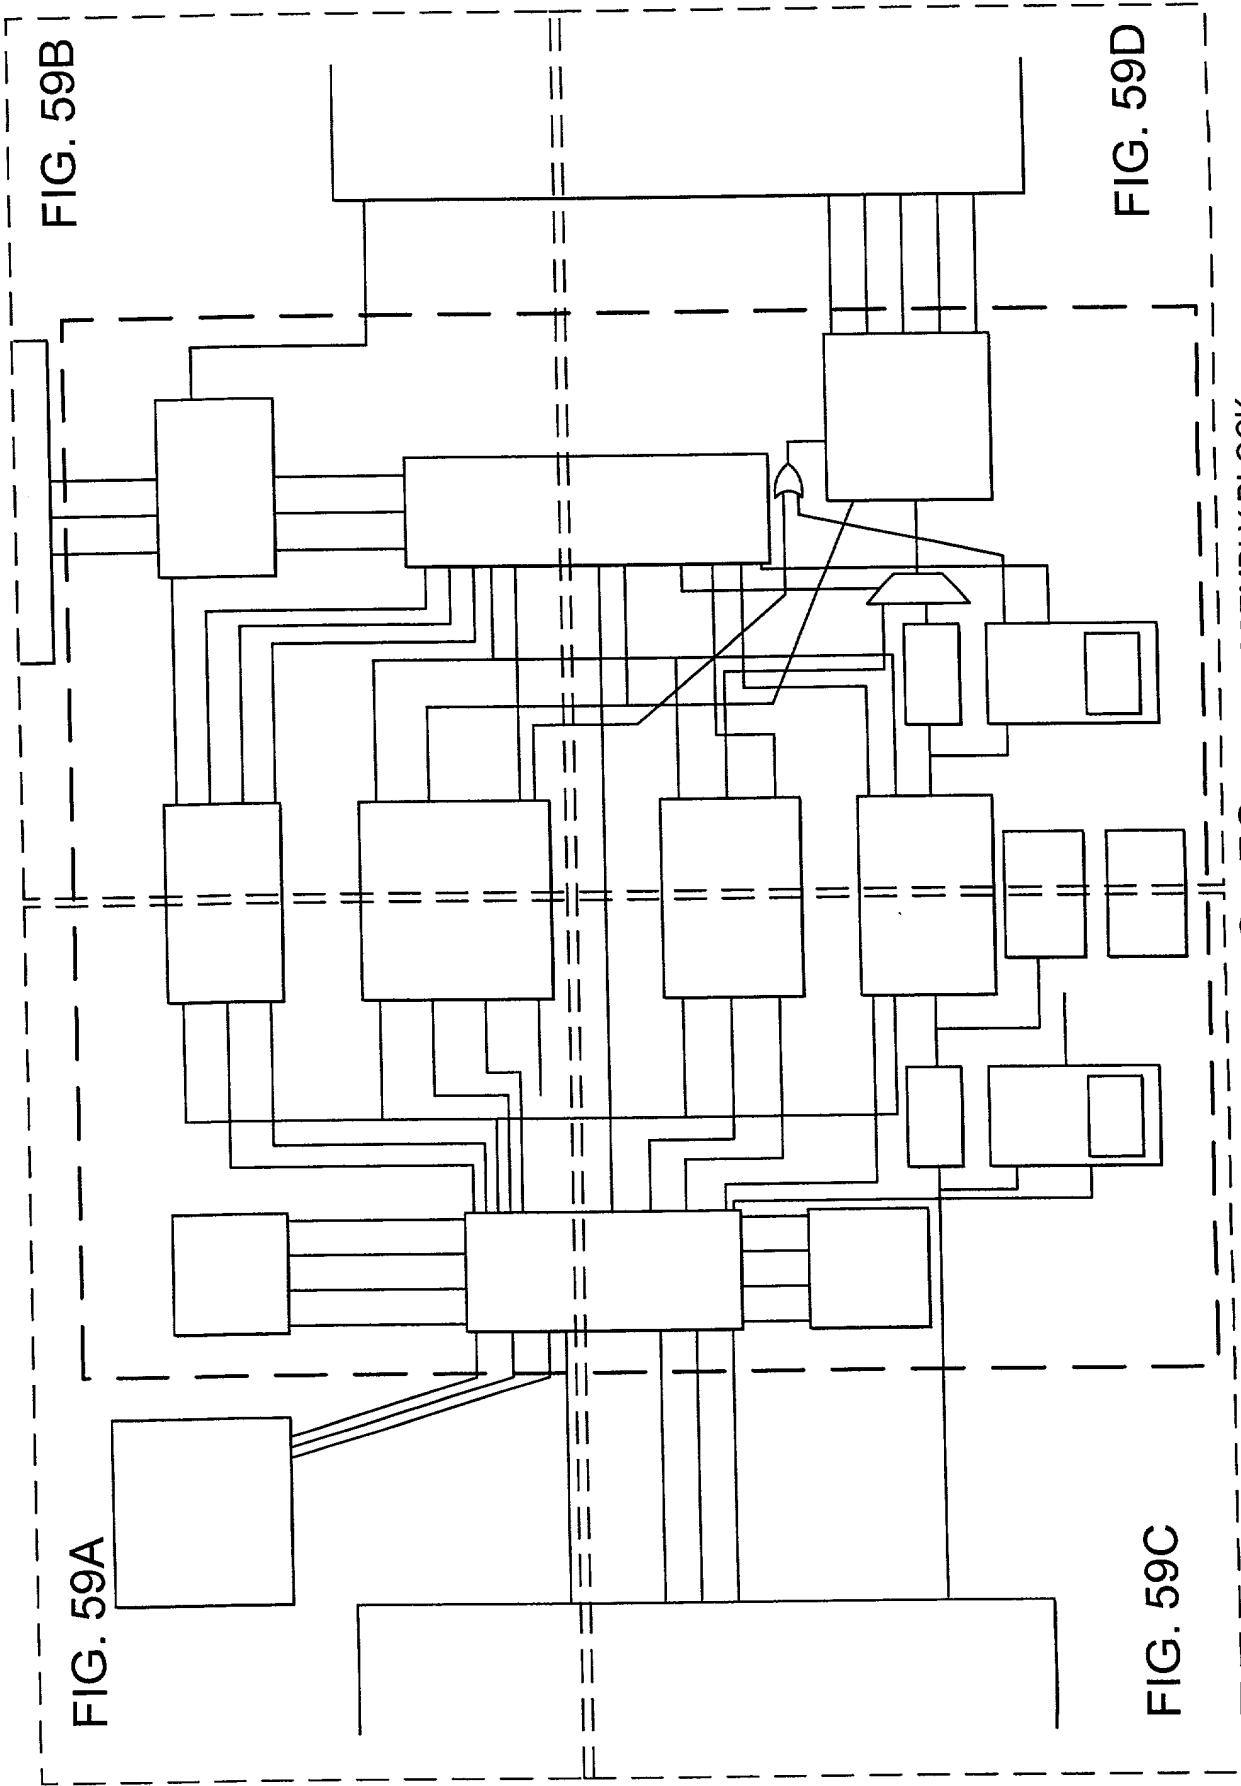

REASSEMBLY BLOCK

FIG. 59



FIG. 59A

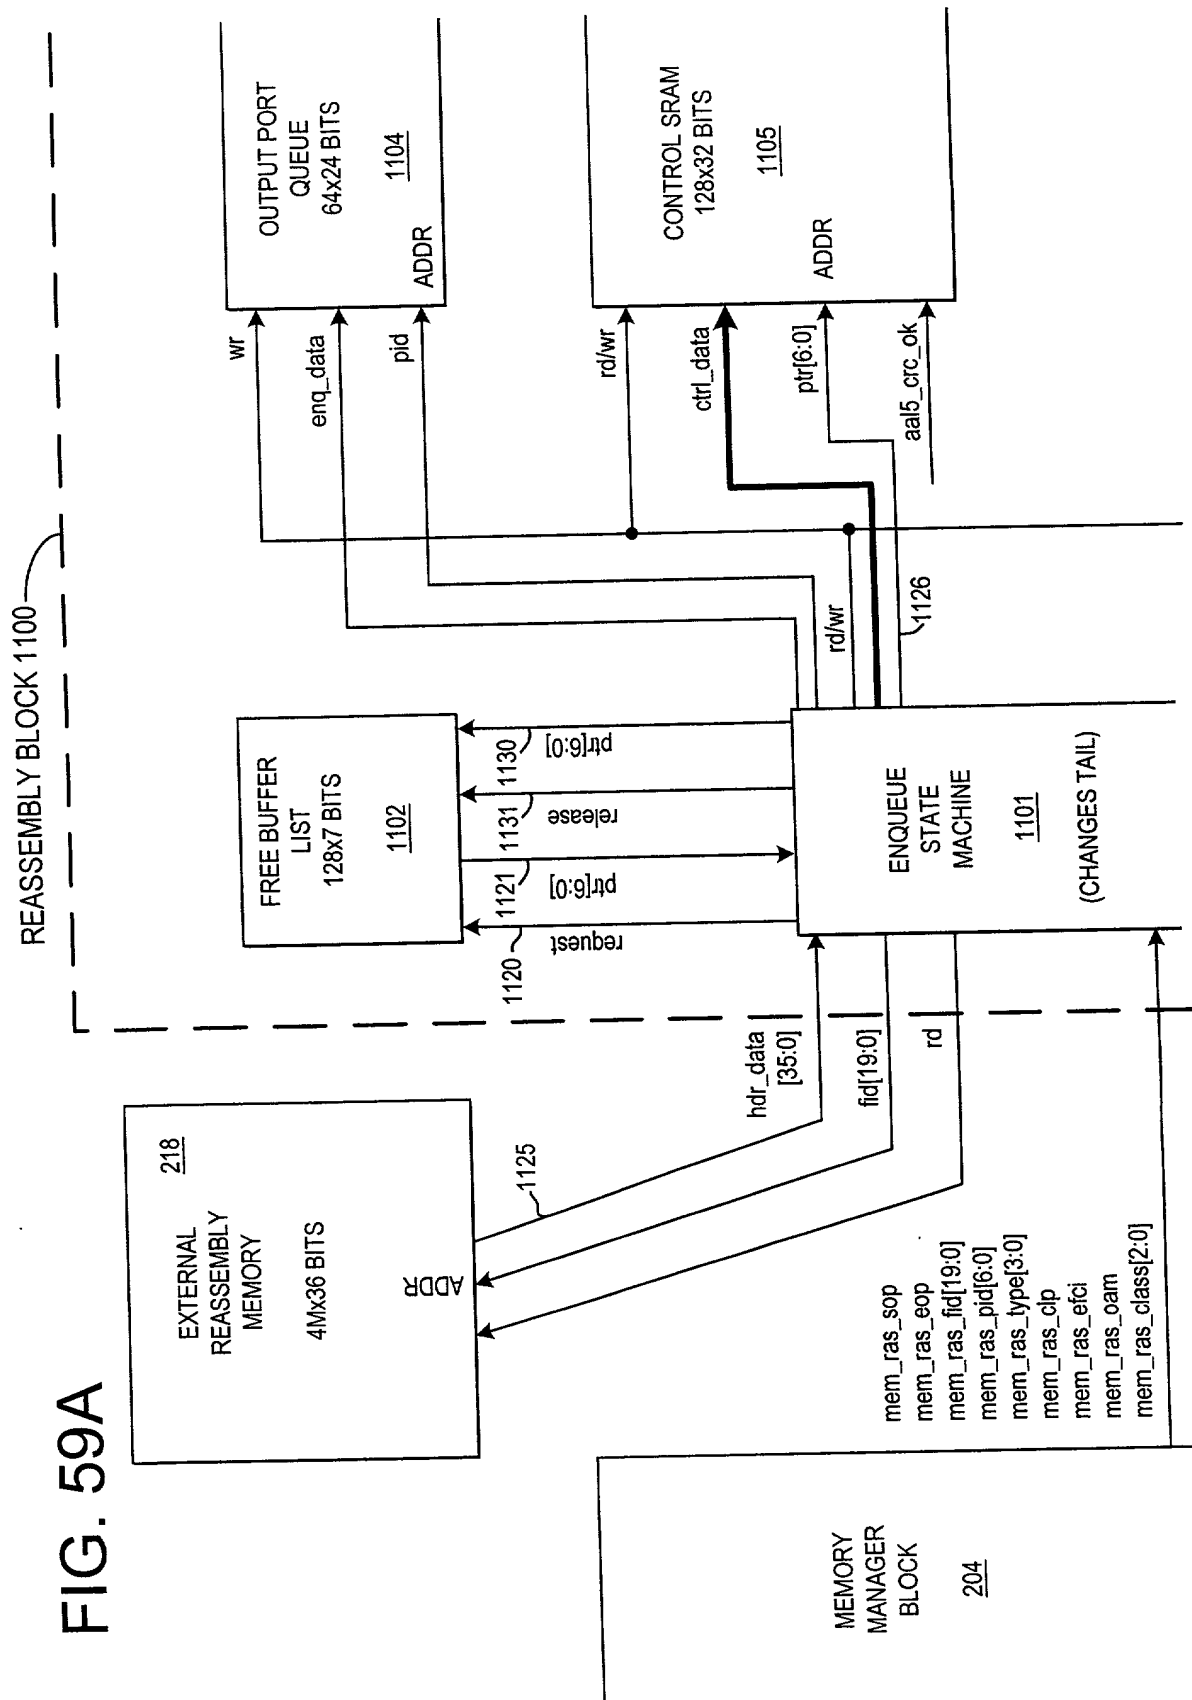


FIG. 59B

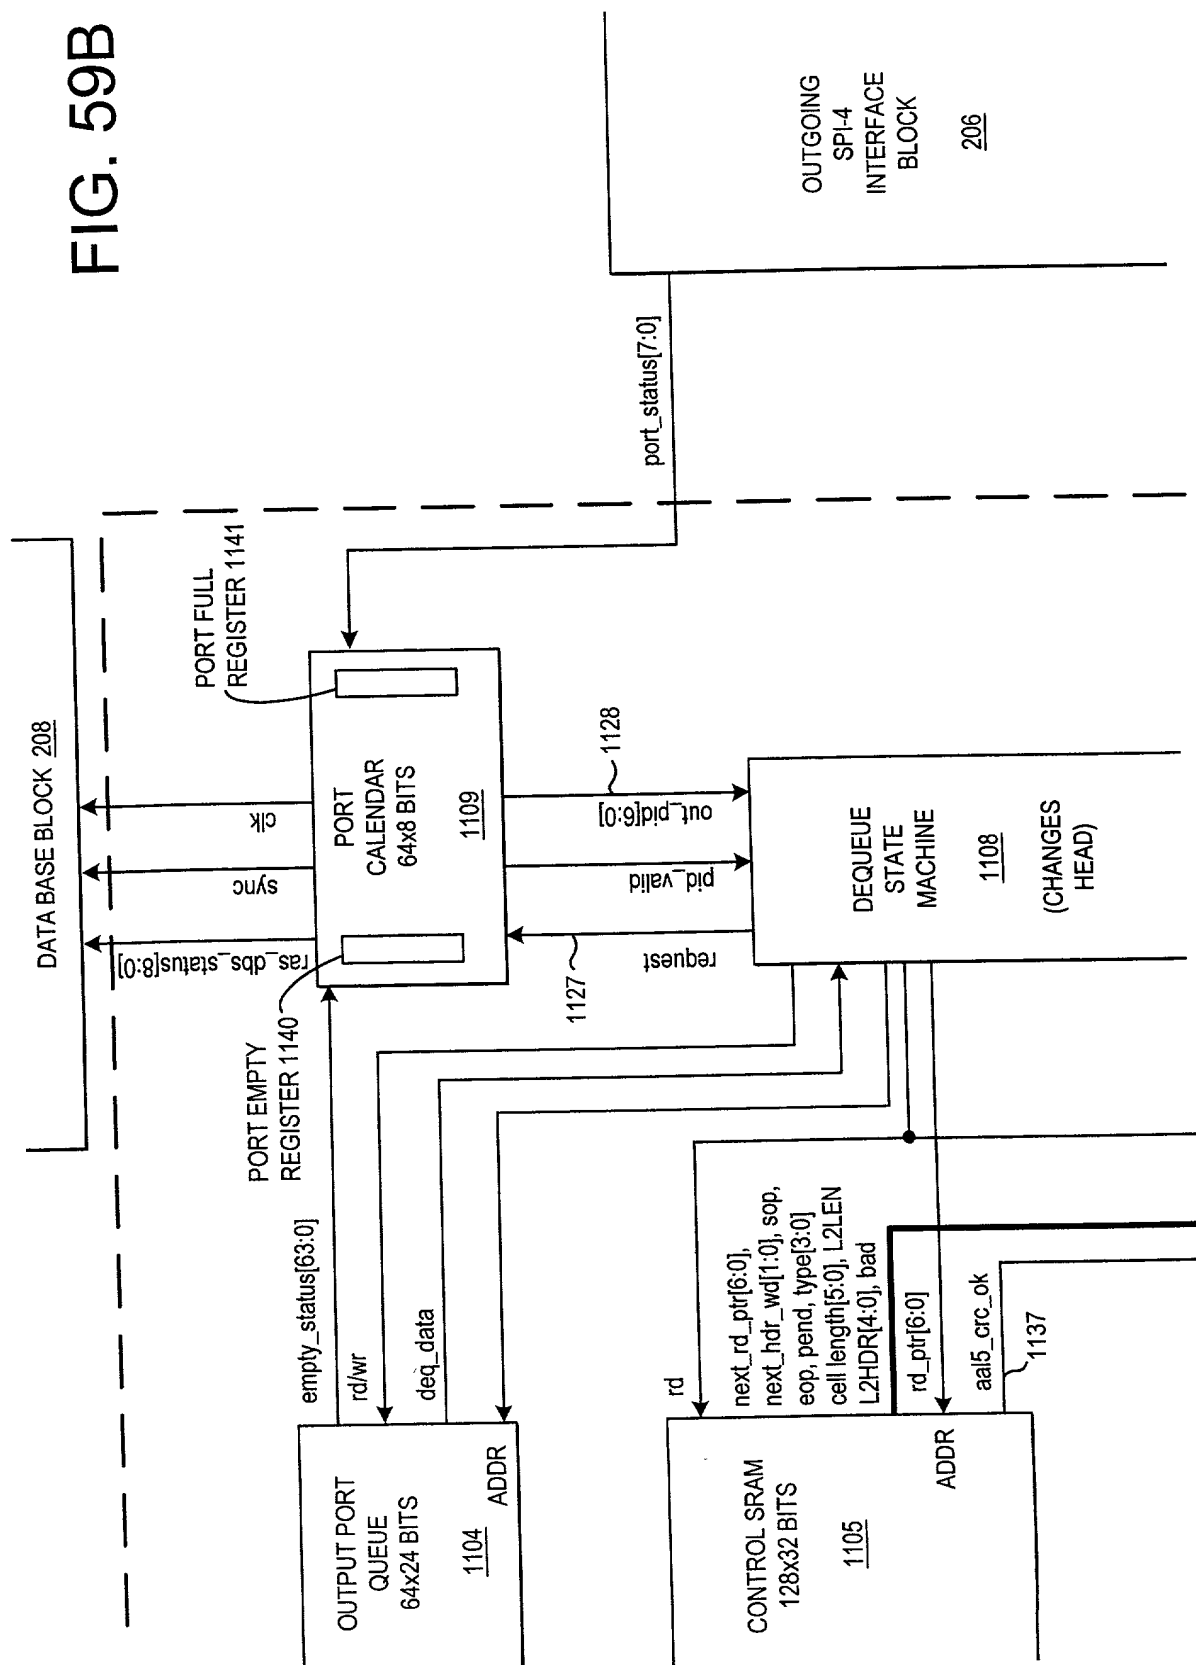


FIG. 59C

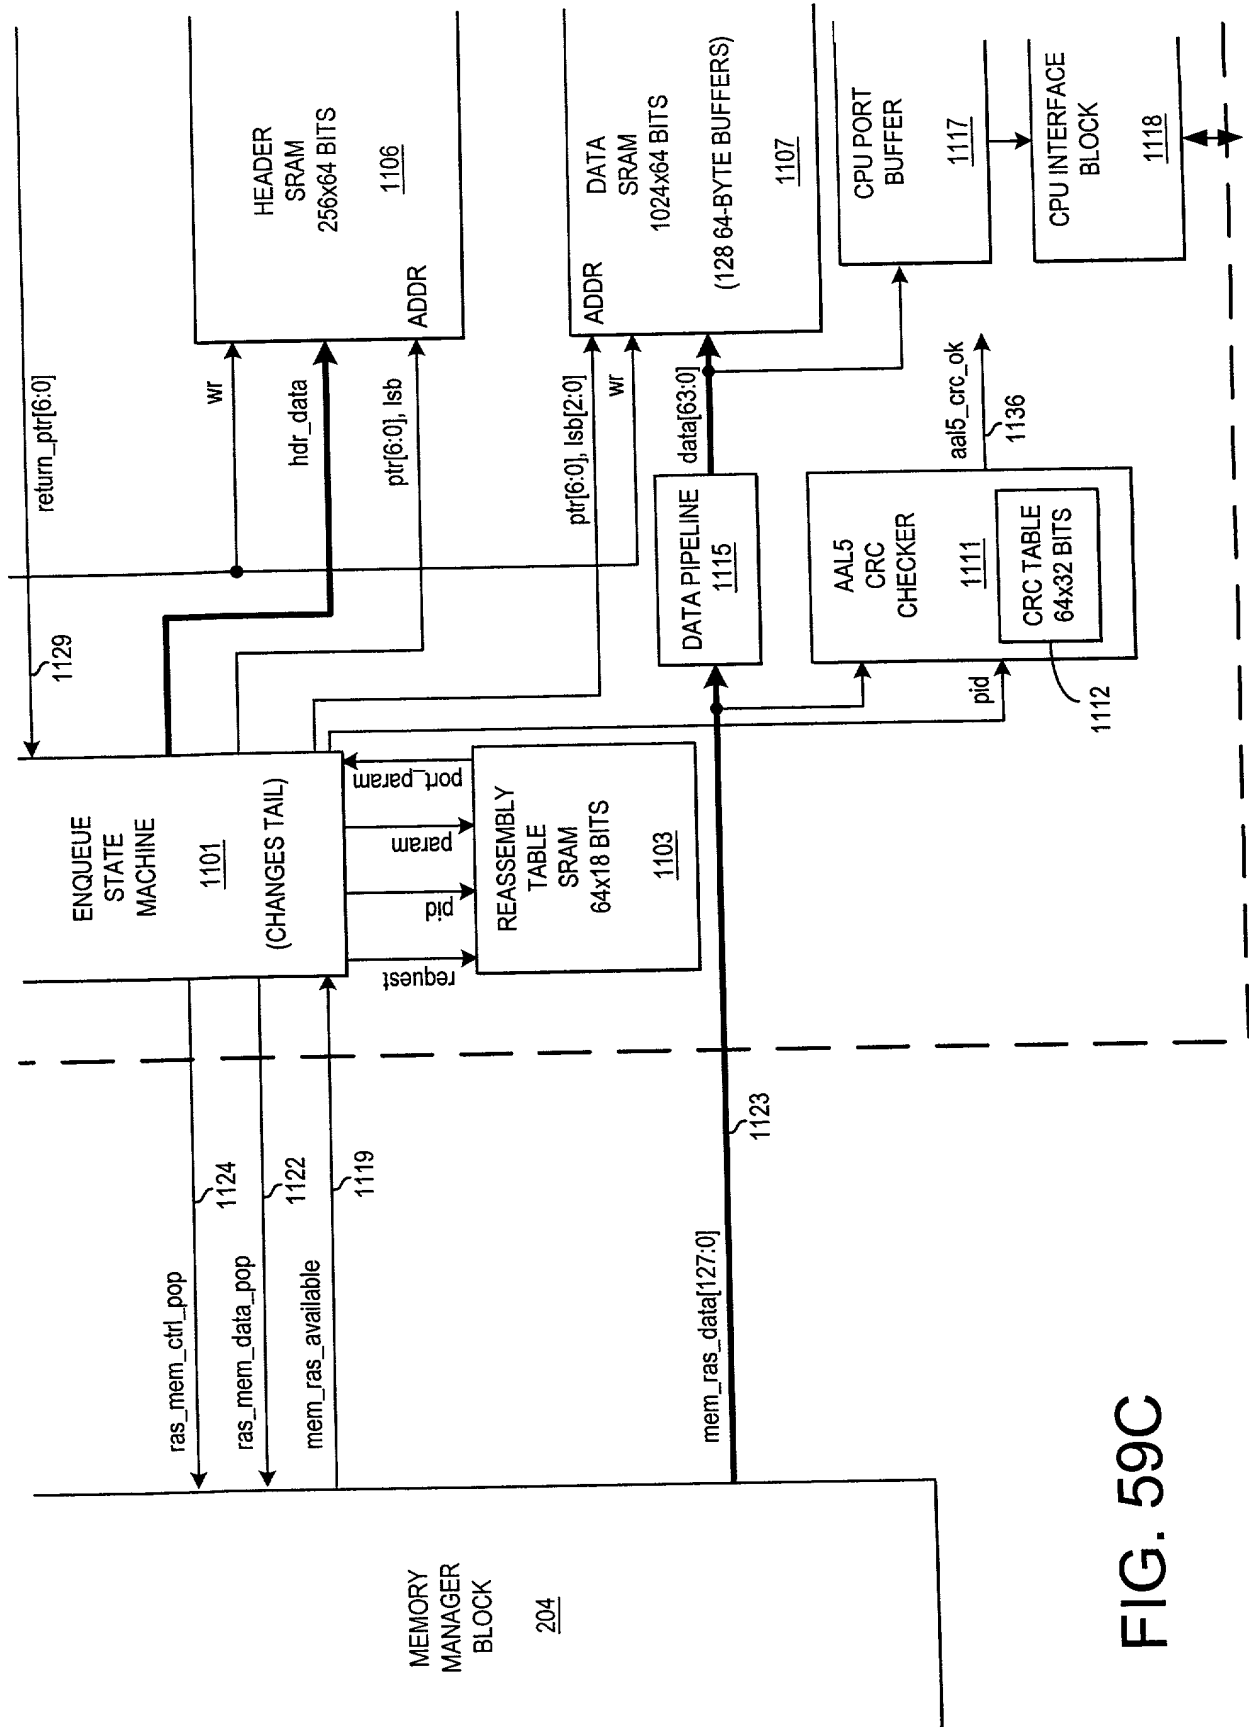


FIG. 59C

FIG. 59D



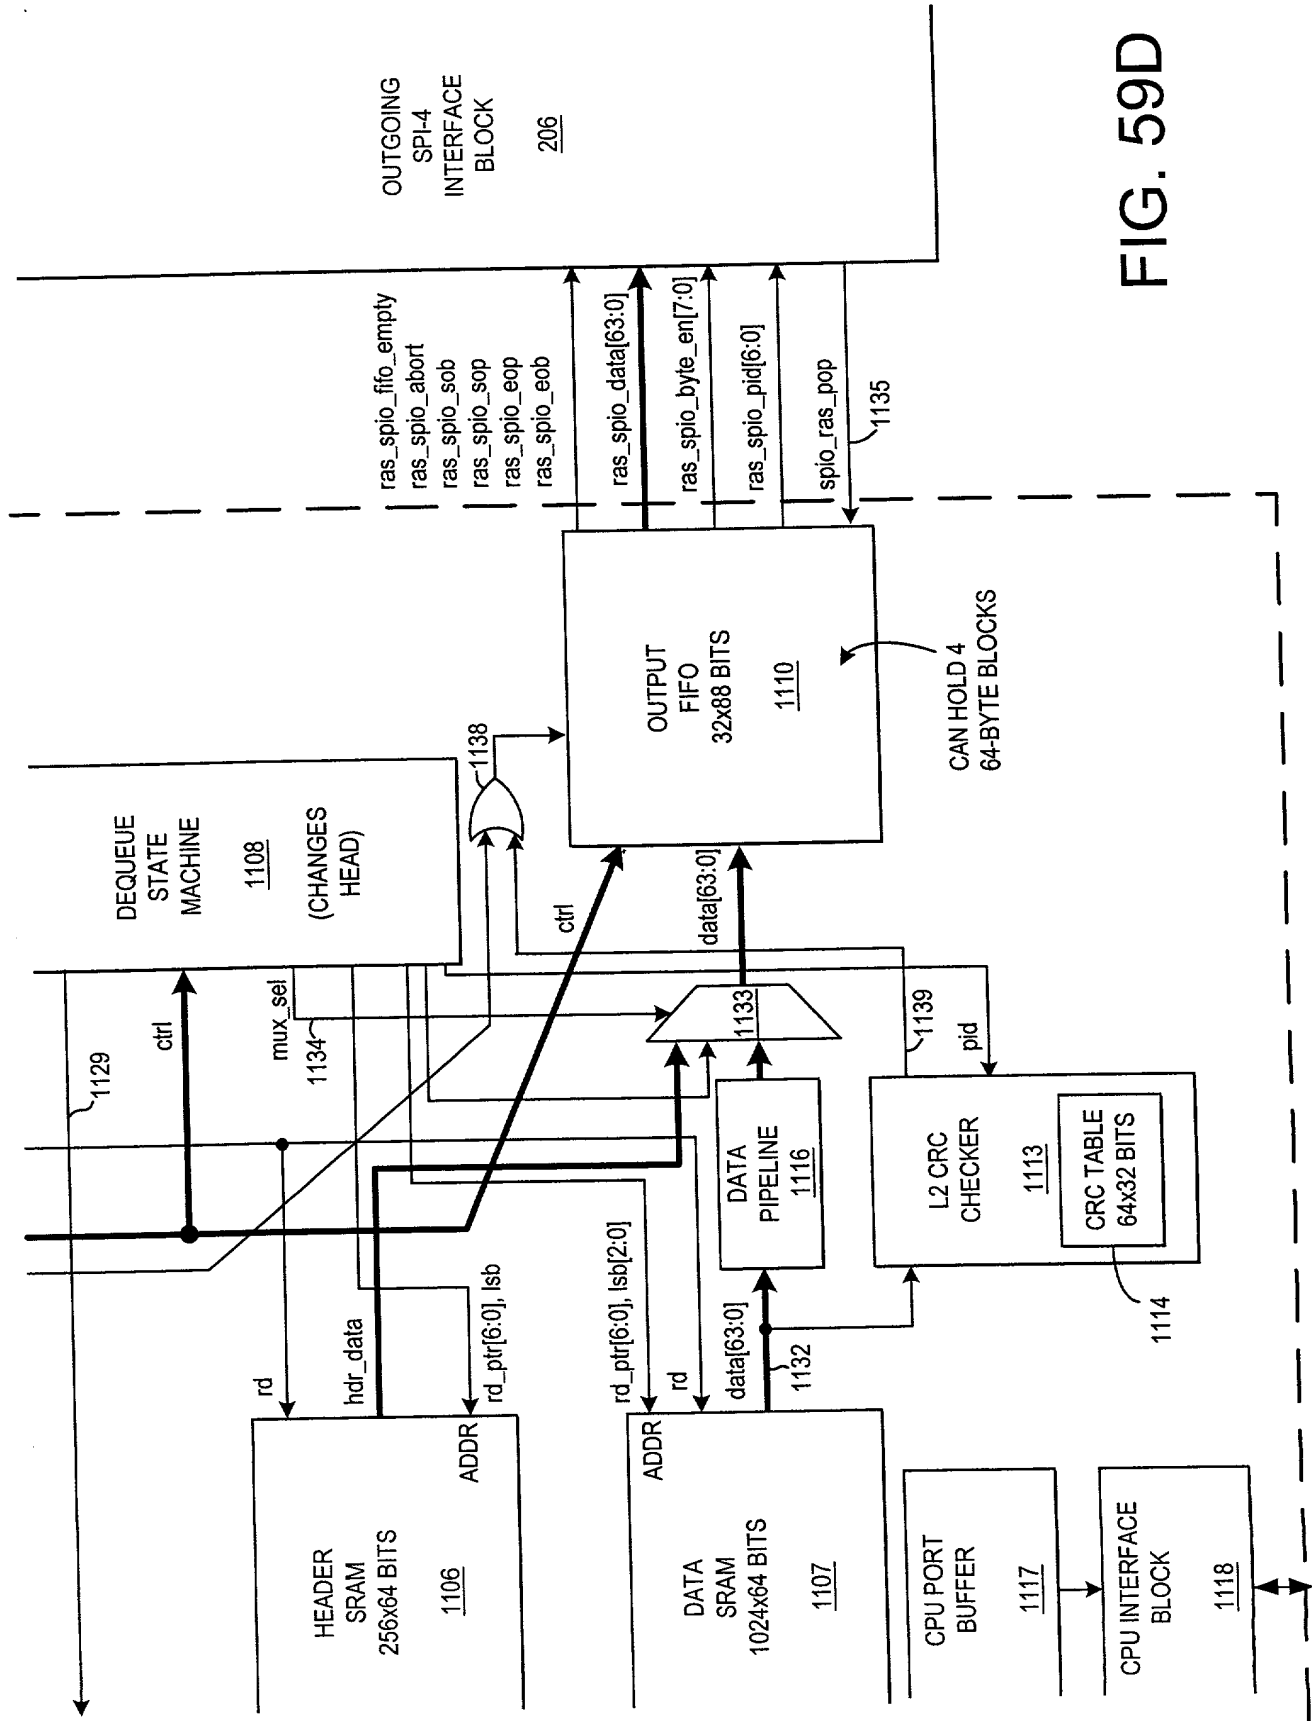


FIG. 59D

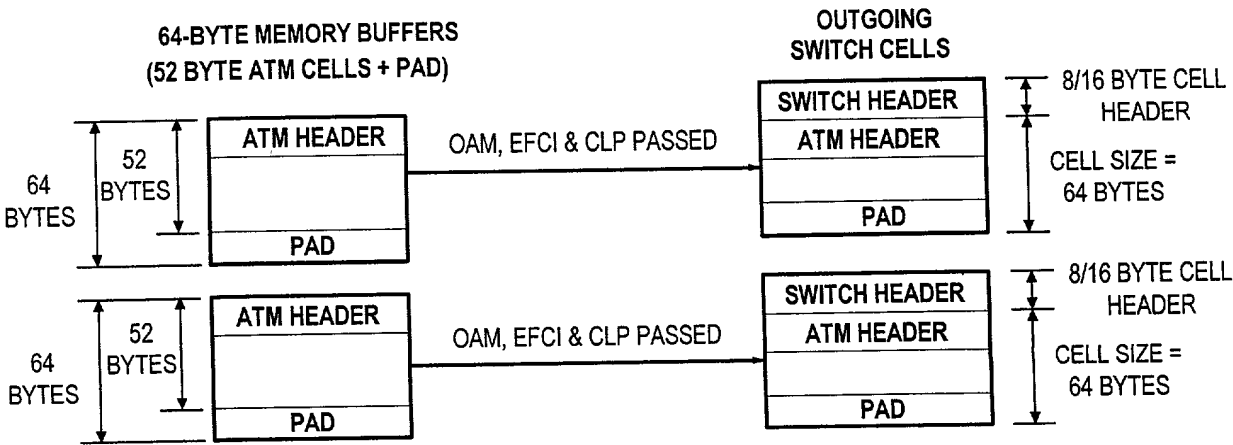

REASSEMBLY TYPE 1  
(INGRESS APPLICATION TYPE 0)


FIG. 60A

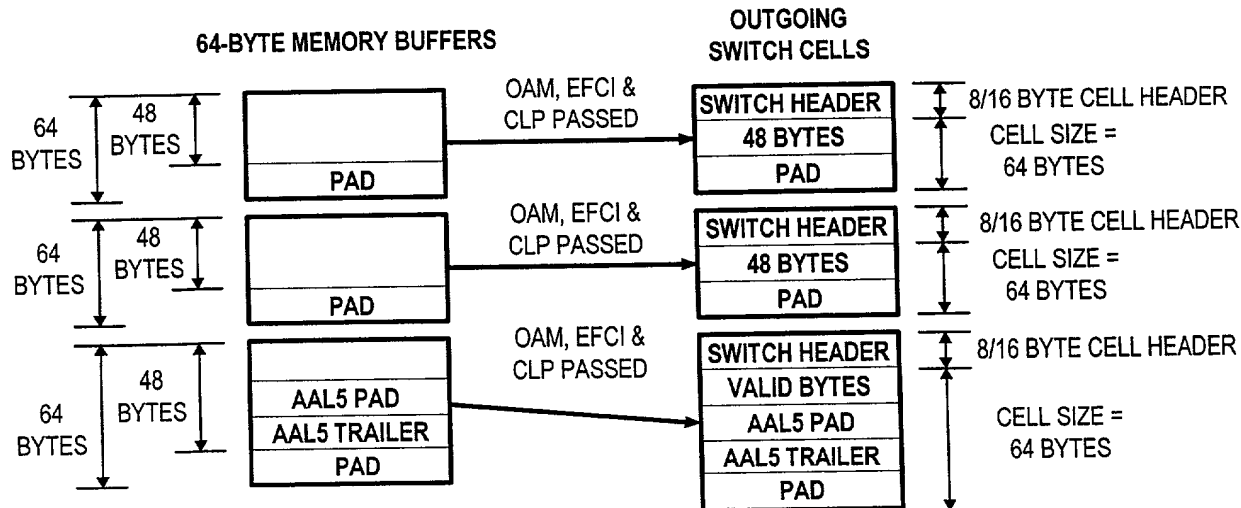

REASSEMBLY TYPE 1  
(INGRESS APPLICATION TYPE 1)


FIG. 60B

FIG. 60A

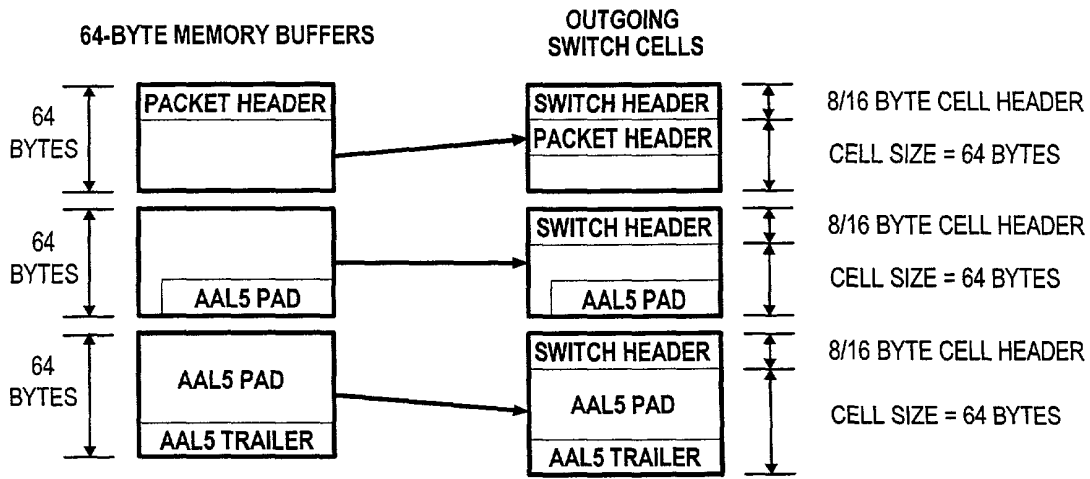

REASSEMBLY TYPE 1  
(INGRESS APPLICATION TYPE 3)



FIG. 60C

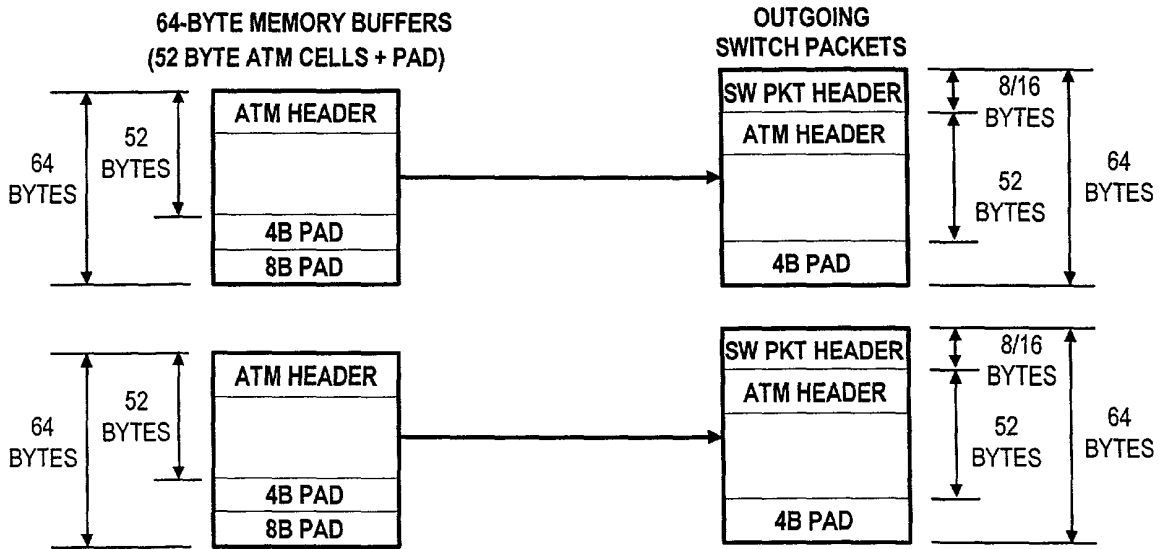


REASSEMBLY TYPE 2  
(INGRESS APPLICATION TYPE 4)

FIG. 60D


FIG. 60C

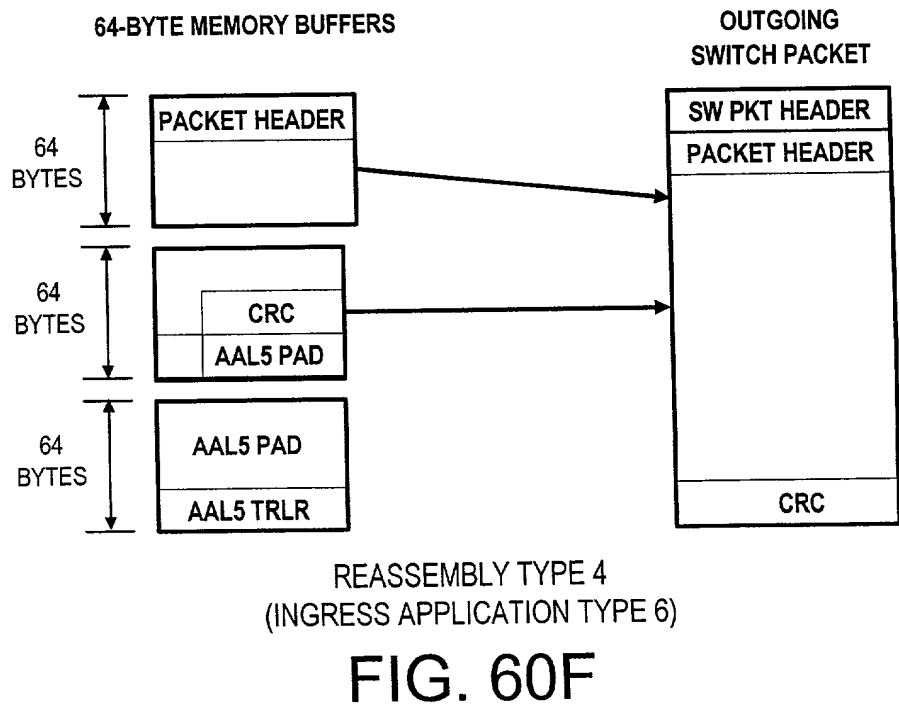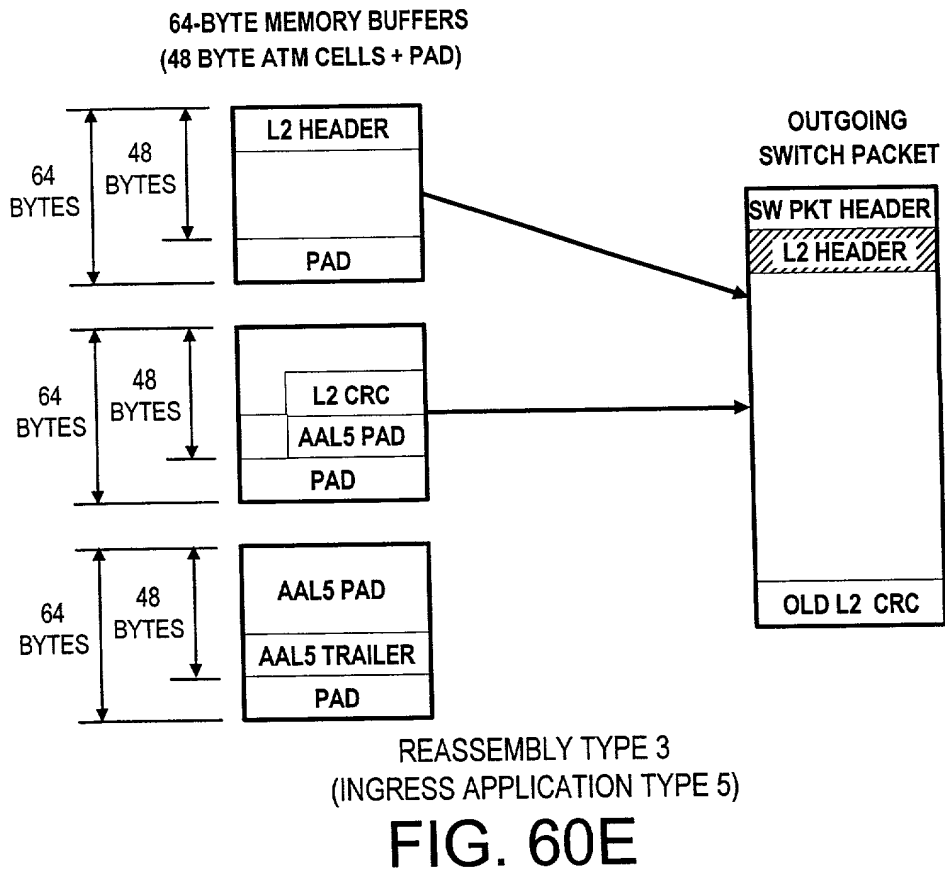

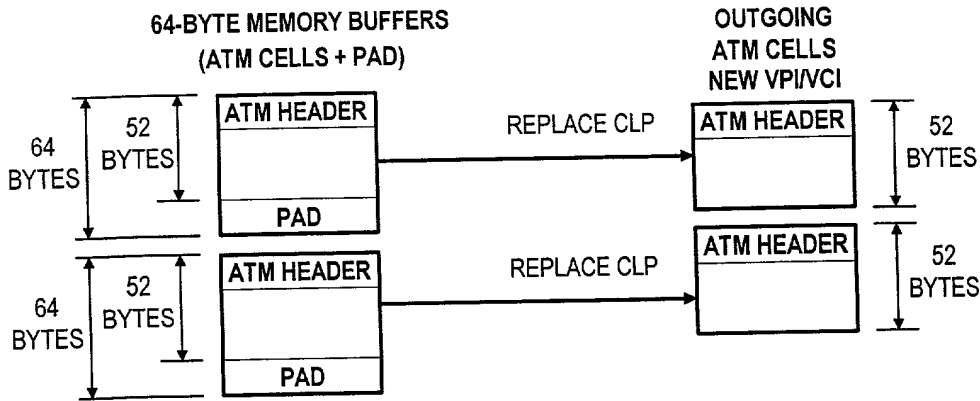

REASSEMBLY TYPE 5  
(EGRESS APPLICATION TYPES 8 AND 12)

FIG. 60G

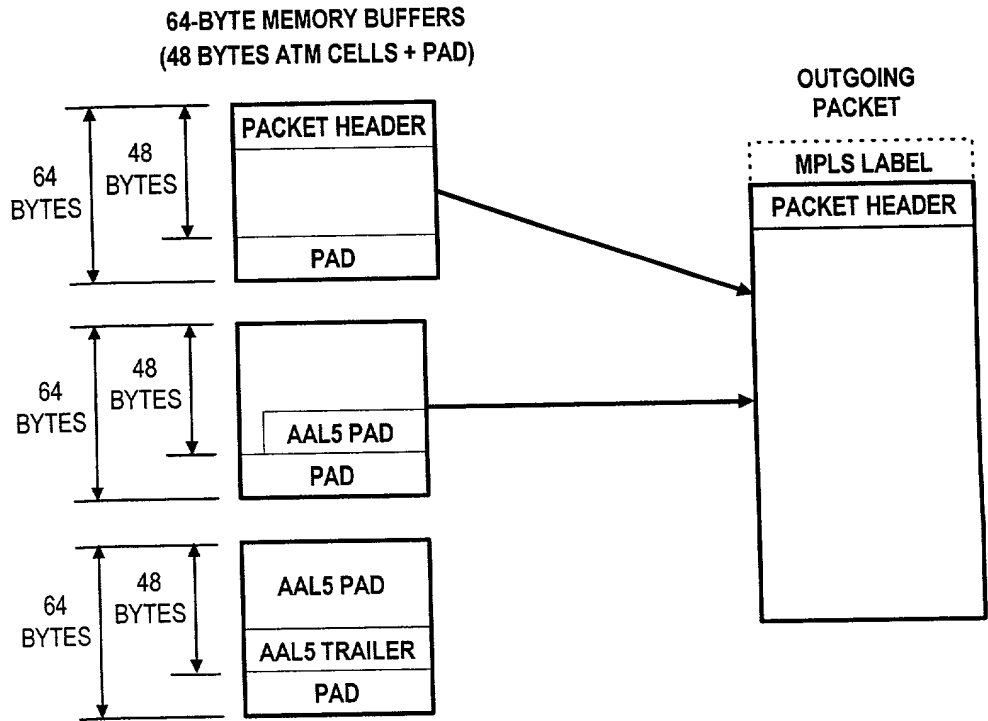


REASSEMBLY TYPE 6  
(EGRESS APPLICATION TYPE 9)

FIG. 60H


FOR ET 292560



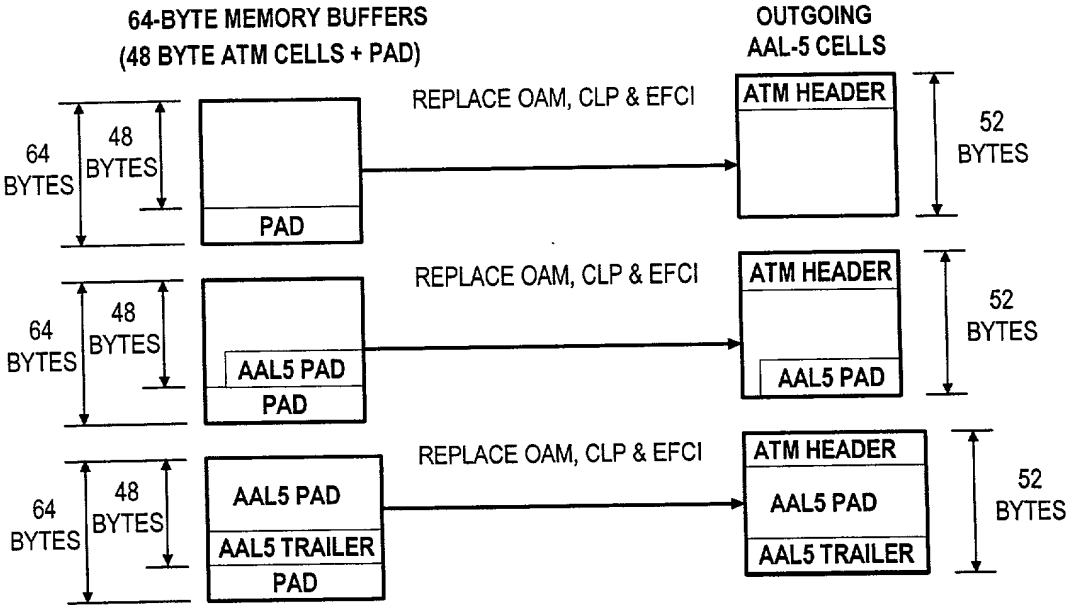

REASSEMBLY TYPE 7  
(INGRESS APPLICATION TYPES 10 AND 13)


FIG. 60I

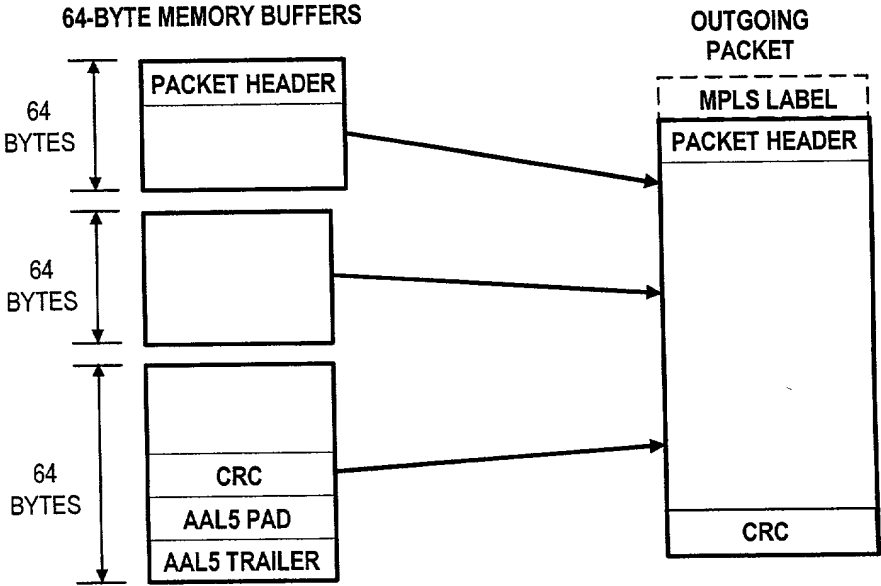

REASSEMBLY TYPE 8  
(INGRESS APPLICATION TYPES 11 AND 14)

FIG. 60J


FIG. 61A

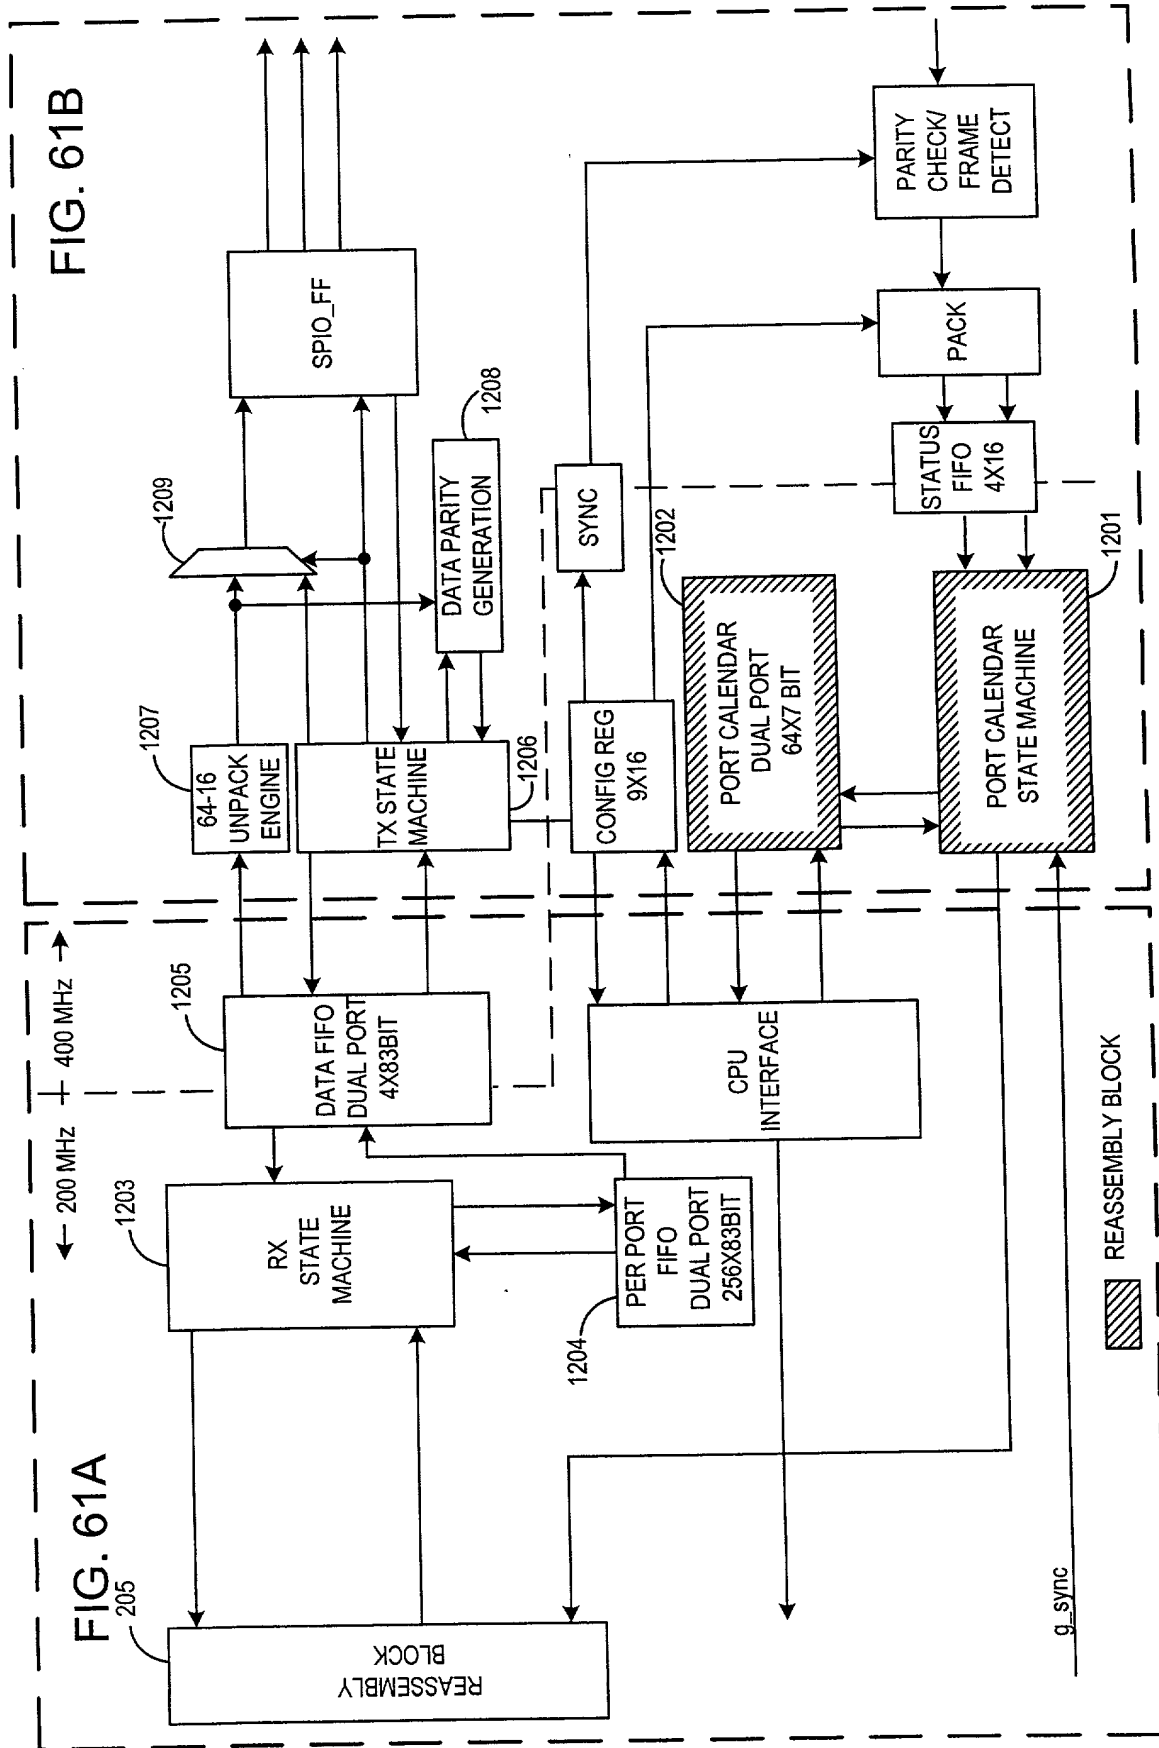

**FIG. 61** OUTGOING SPI-4 INTERFACE BLOCK

Figure 1 consists of 15 bar charts, labeled (a) through (o), each representing a different variable. Each chart compares two groups: 'No' (represented by white bars) and 'Yes' (represented by black bars). The y-axis for all charts represents the percentage of respondents, ranging from 0 to 100 percent. The variables are as follows:

- (a) Age: 18-24, 25-34, 35-44, 45-54, 55-64, 65-74, 75-84, 85-94, 95-104.
- (b) Sex: Male, Female.
- (c) Education: Less than high school, High school, Some college, College, Postgraduate.
- (d) Income: Less than \$10,000, \$10,000-\$19,999, \$20,000-\$29,999, \$30,000-\$39,999, \$40,000-\$49,999, \$50,000-\$59,999, \$60,000-\$69,999, \$70,000-\$79,999, \$80,000-\$89,999, \$90,000-\$99,999, \$100,000 or more.
- (e) Employment: Full-time, Part-time, Unemployed, Retired, Other.
- (f) Home ownership: Own, Rent, Other.
- (g) Religion: Protestant, Catholic, Jewish, Muslim, Other.
- (h) Political affiliation: Republican, Democrat, Independent, Other.
- (i) Party affiliation: Republican, Democrat, Independent, Other.
- (j) Party identification: Republican, Democrat, Independent, Other.
- (k) Party loyalty: Republican, Democrat, Independent, Other.
- (l) Party support: Republican, Democrat, Independent, Other.
- (m) Party trust: Republican, Democrat, Independent, Other.
- (n) Party confidence: Republican, Democrat, Independent, Other.
- (o) Party respect: Republican, Democrat, Independent, Other.

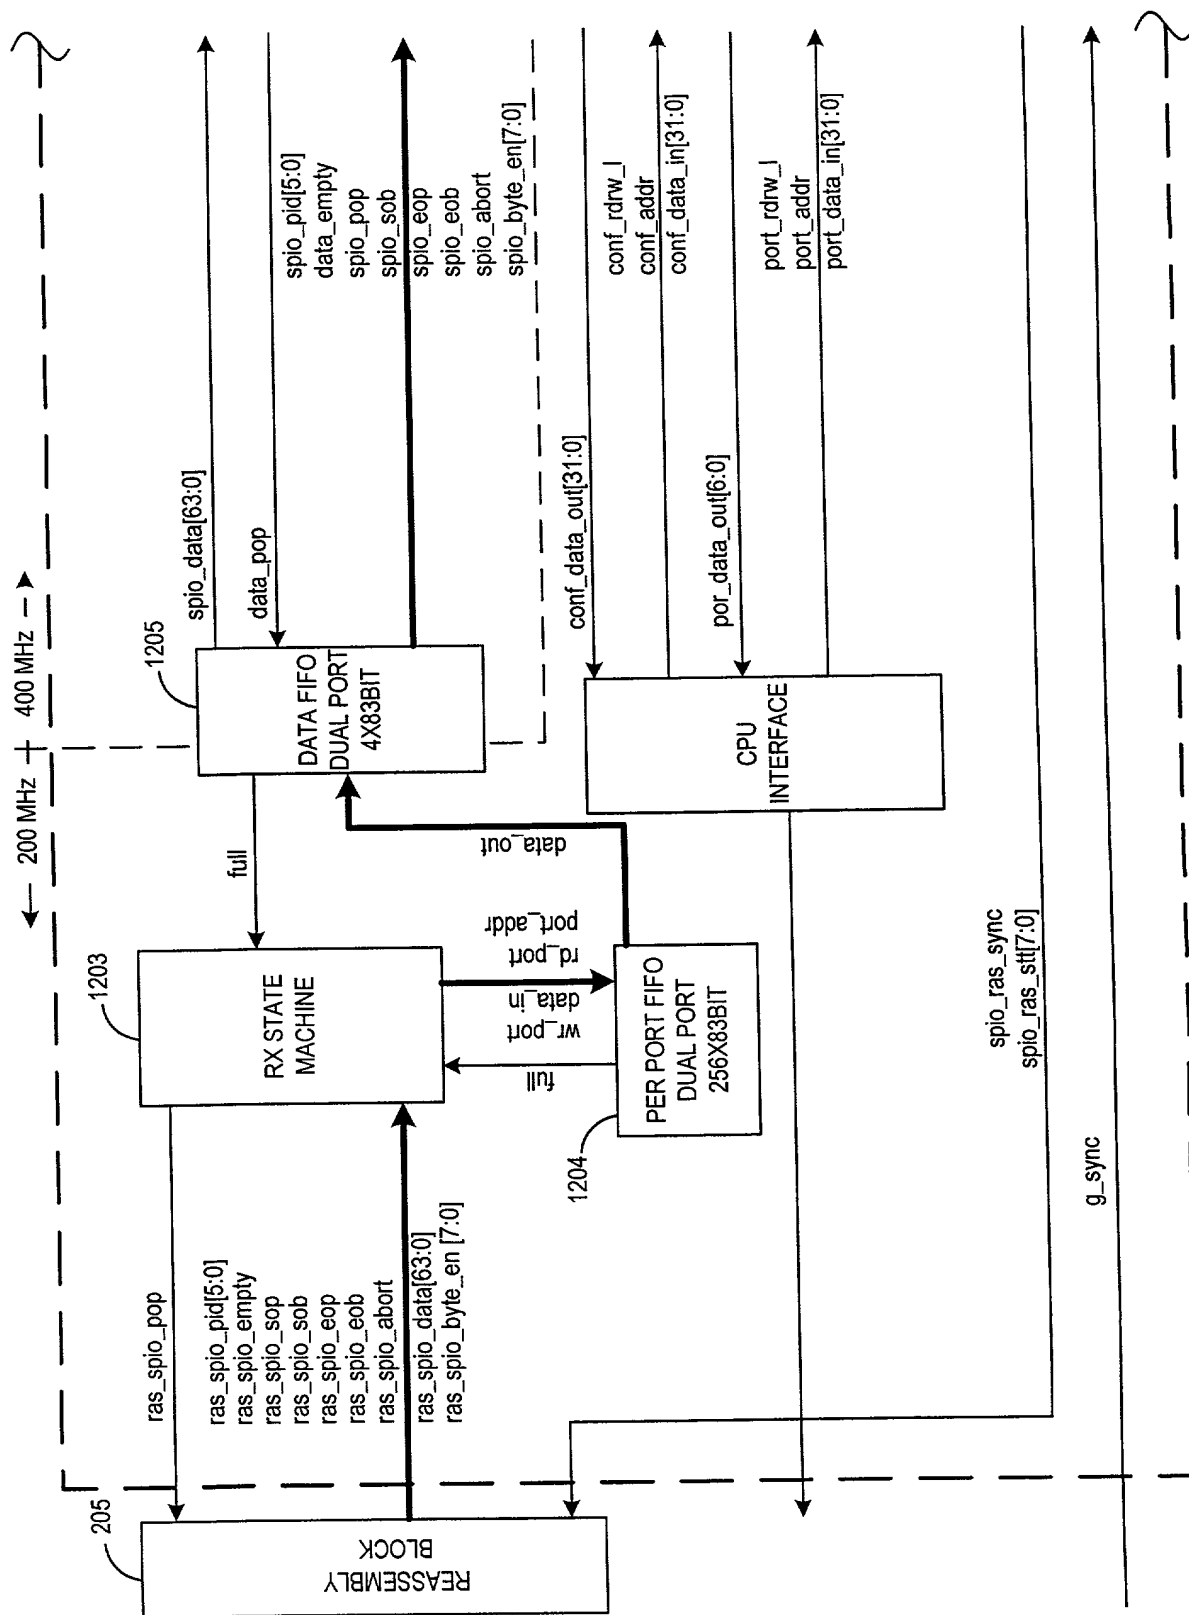

**FIG. 61A**

FIG. 61A

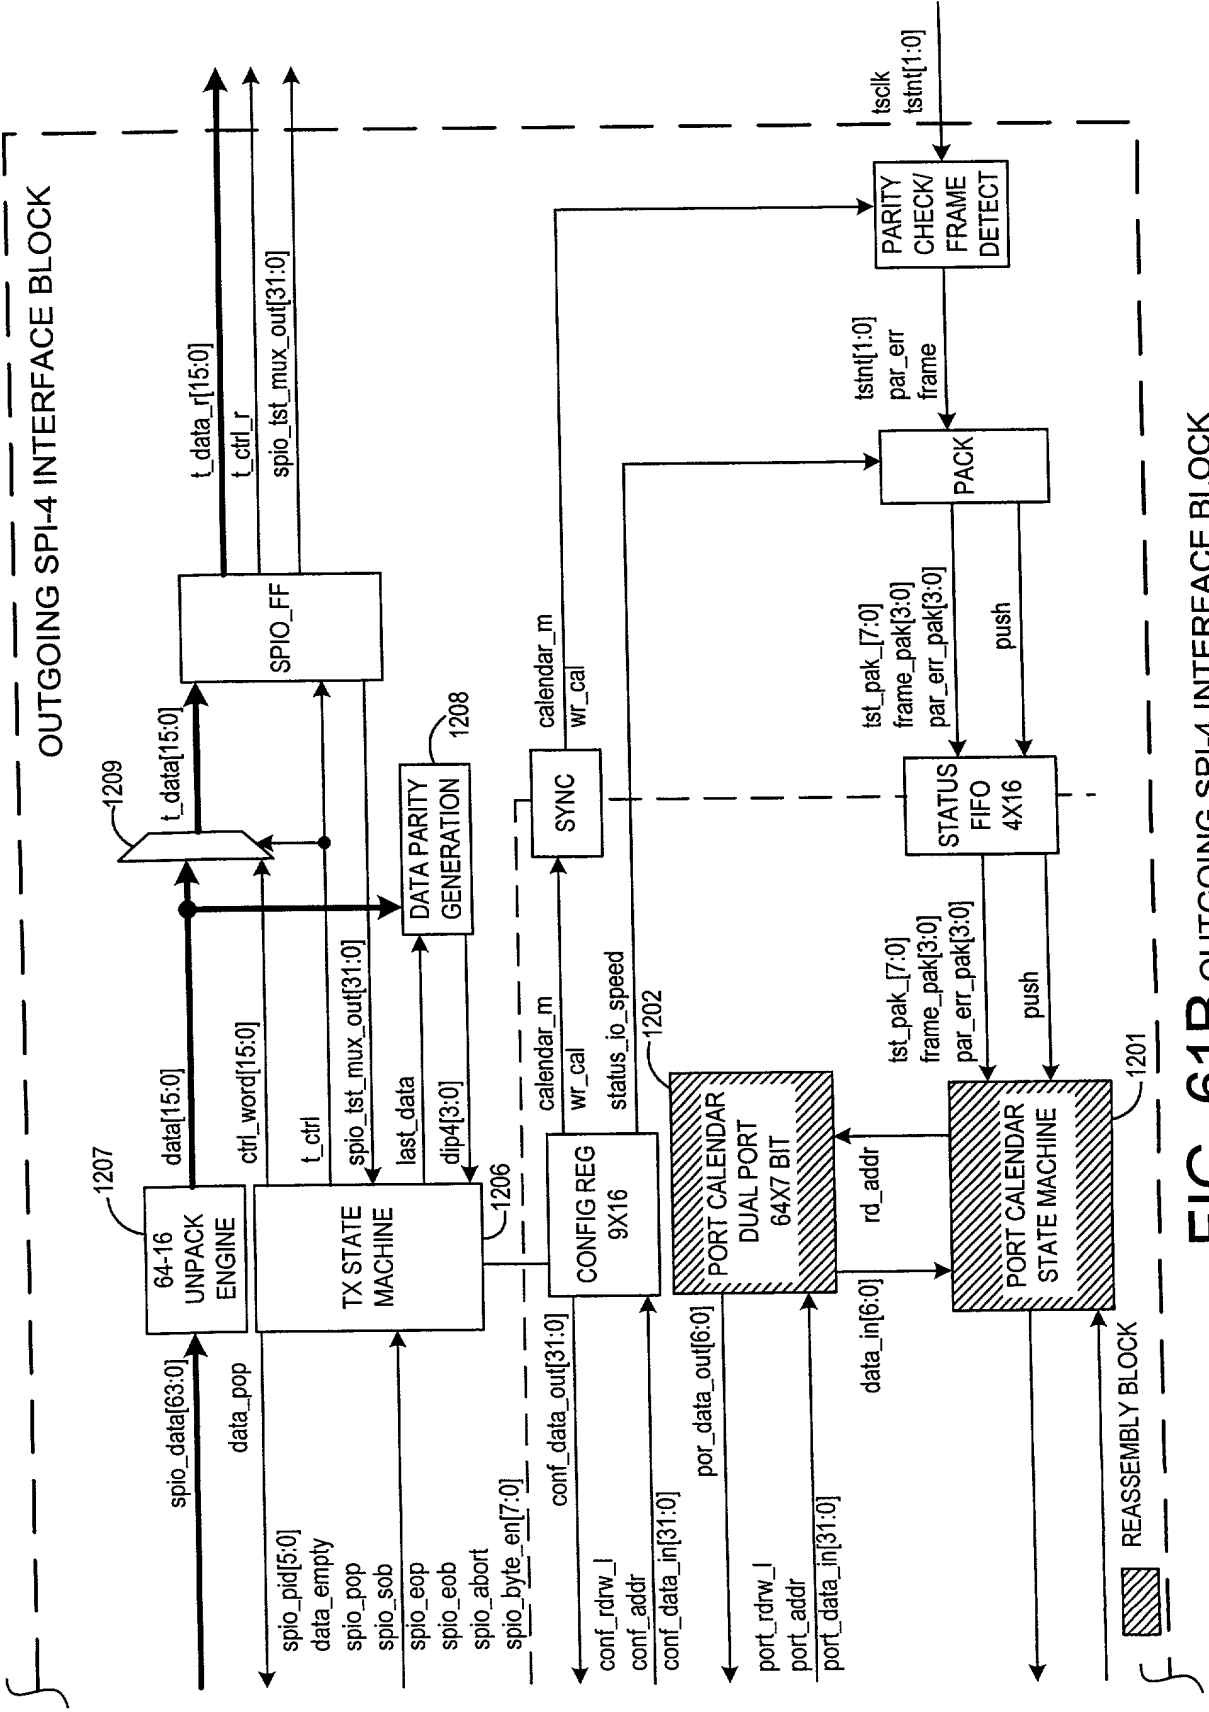


FIG. 61B OUTGOING SPI-4 INTERFACE BLOCK

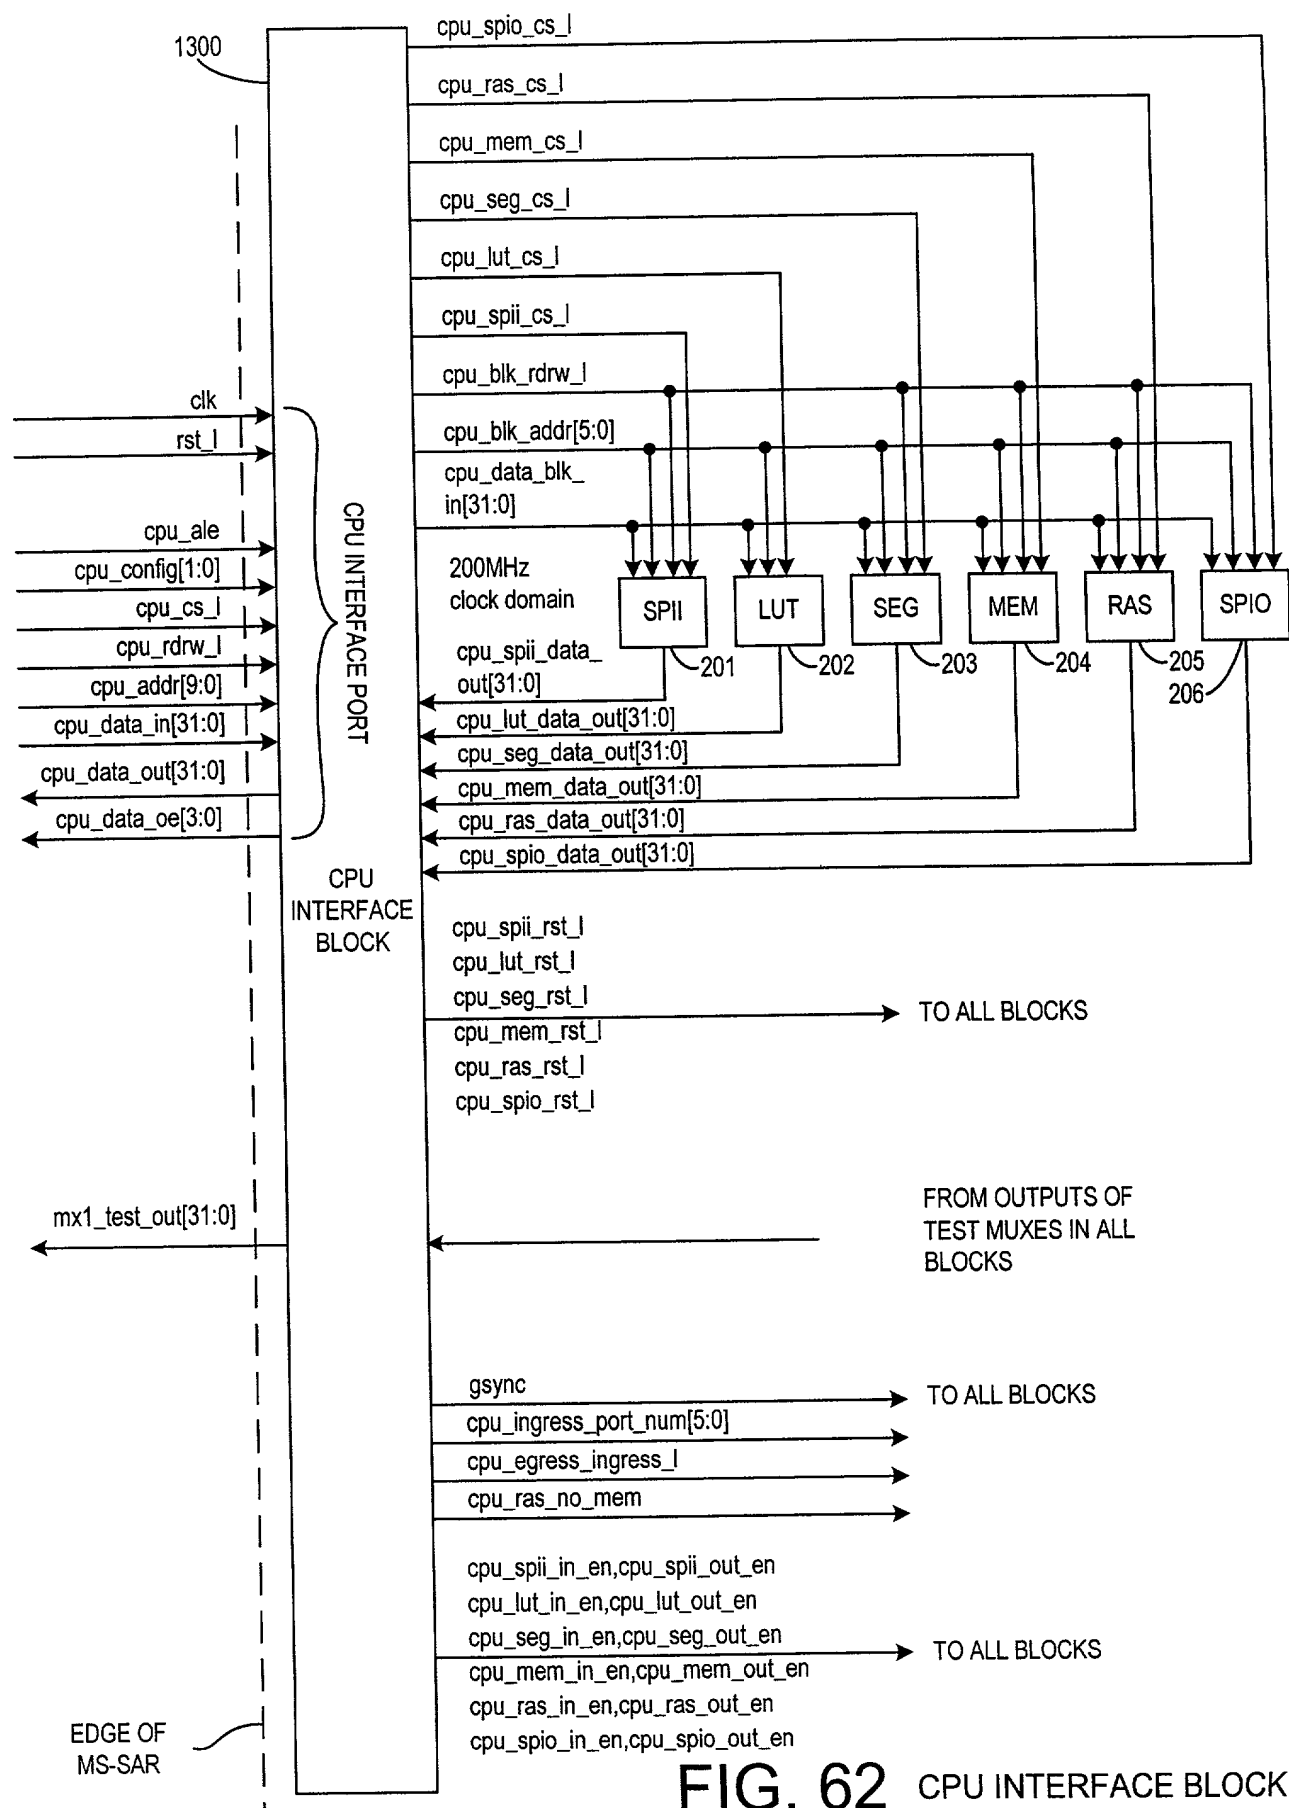


FIG. 62 CPU INTERFACE BLOCK